

Supplementary information for

Optimising the Hydraulic Retention Time in a Pilot-Scale Microbial Electrolysis Cell to Achieve High Volumetric Treatment Rates Using Concentrated Domestic Wastewater

Daniel D. Leicester ¹, Jaime M. Amezaga ¹, Andrew Moore ² and Elizabeth S. Heidrich ^{1,*}

¹ School of Engineering, Newcastle University, Newcastle-upon-Tyne NE1 7RU, UK

² Northumbrian Water Limited, Northumbria House, Abbey Road, Durham DH1 5FJ, UK

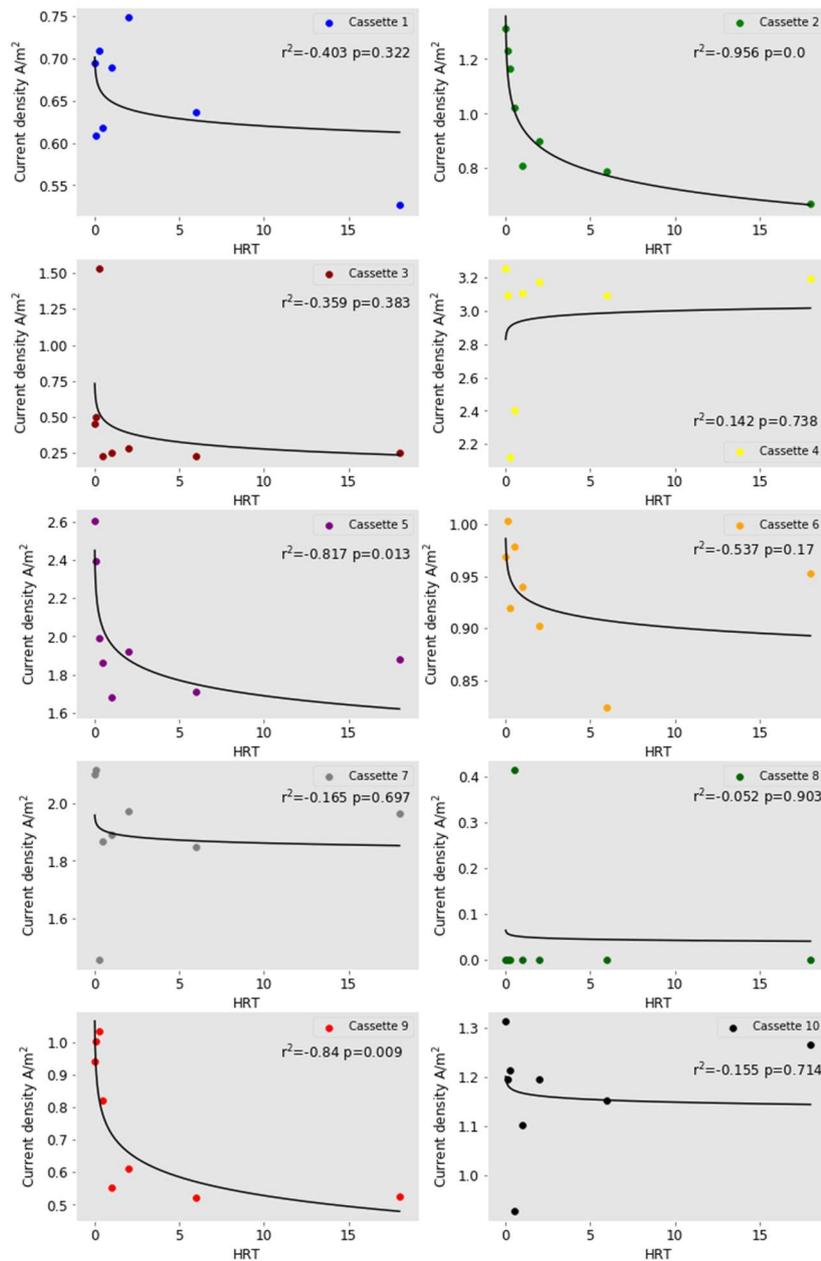


Figure S1. The average current densities compared to HRT for the 10-cassette style electrodes.