

Poly (3,4-Ethylenedioxythiophene) (PEDOT) Nanofibers Decorated Graphene Oxide (GO) as High-Capacity, Long Cycle Anodes for Sodium Ion Batteries

Zejun Pu¹, Penglun Zheng^{2,*} and Yu Zhang^{3,*}

¹ College of Materials Science and Engineering, Sichuan University of Science & Engineering, Zigong 643000, China; puzj@susue.edu.cn

² High Temperature Resistant Polymer and Composites Key Laboratory of Sichuan Province, University of Electronic Science and Technology of China, Chengdu 610054, China

³ School of Materials Science and Engineering, Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798, Singapore

* Correspondence: 18482179228@163.com (P.A.); yzhang071@e.ntu.edu.sg (Y.Z.)

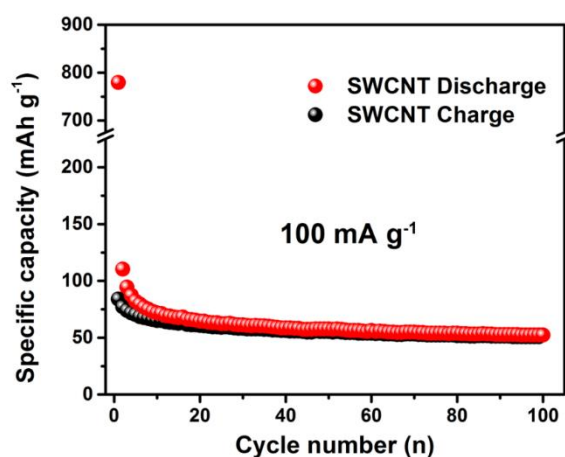


Figure S1. Cycling performance of the pure SWCNT electrode for SIBs at a current density of 100 mA g⁻¹.