

Ultra-Sensitive Piezo-Resistive Sensors Constructed with Reduced Graphene Oxide/Polyolefin Elastomer (RGO/POE) Nanofiber Aerogels

Weibing Zhong^a, Haiqing Jiang^b, Liyan Yang^b, Ashish Yadav^b, Xincheng Ding^b, Yuanli Chen^b, Mufang Li^b, Gang Sun^{a,c}, Dong Wang^{a,b*}

a. College of Chemistry, Chemical Engineering and Biotechnology, Donghua University, Shanghai 201620, China

b. Hubei Key Laboratory of Advanced Textile Materials & Application, Wuhan Textile University, Wuhan 430200, China

c. University of California, Davis, CA 95616-8598 USA

* Corresponding author: wangdon08@126.com (D. Wang)

Table S1. The volume retention of the prepared GO/POE nanofiber aerogels after reduction

POE / GO proportion	5:1	4:2	3:3	2:4	0:6
Volume retention (%)	14.91	30.00	47.23	77.64	140.48

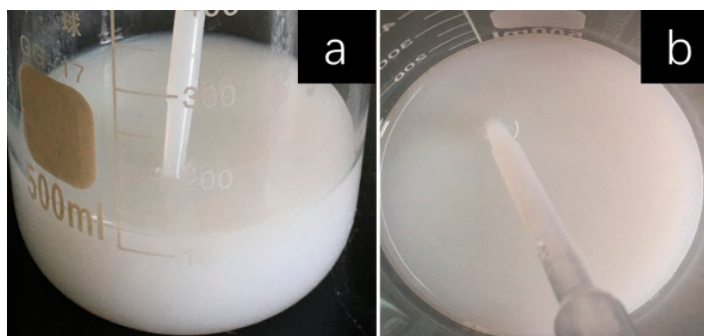


Figure S1. The photographs of the uniform POE nanofiber suspension obtained from different observing angles