

Article

Powerful Software to Simulate Soil Consolidation Problems with Prefabricated Vertical Drains

Gonzalo García-Ros ^{1,*}, Iván Alhama ¹ and Manuel Cánovas ² 

¹ Civil Engineering Department, Technical University of Cartagena, Paseo Alfonso XIII 52, 30203 Cartagena, Spain; ivan.alhama@upct.es

² Metallurgical and Mining Engineering Department, Universidad Católica del Norte, Av. Angamos 0610, Antofagasta (Región de Antofagasta), Chile; manuel.canovas@ucn.cl

* Correspondence: gonzalo.garcia@upct.es

Received: 2 February 2018; Accepted: 23 February 2018; Published: 27 February 2018

Abstract: The present work describes the program Simulation of Consolidation with Vertical Drains (SICOMED_2018), a tool for the solution of consolidation processes in heterogeneous soils, with totally or partially penetrating prefabricated vertical drains (PVD) and considering both the effects of the smear zone, generated when introducing the drain into the ground, and the limitation in the discharge capacity of the drain. In order to provide a completely free program, the code Next-Generation Simulation Program with Integrated Circuit Emphasis (Ngspice) has been used as a numerical tool while the Matrix Laboratory (MATLAB) code was used to program and create an interface with the user through interactive screens. In this way, SICOMED_2018 is presented as an easy-to-use and intuitive program, with a simple graphical interface that allows the user to enter all the soil properties and geometry of the problem without having to resort to a complex software package that requires programming. Illustrative applications describe both the versatility of the program and the reliability of its numerical solutions.

Keywords: consolidation software; vertical drains; heterogeneous soils; smear; drain resistance

1. Introduction

The use of specific software for the understanding of complex physical phenomena involved in engineering problems has become an indispensable tool in modern teaching, mainly due to the high costs involved in laboratory tests. These programs, in spite of the effort and knowledge—especially of programming and calculation—that their development require, are generally designed by the university departments themselves as an interdisciplinary work among several areas of knowledge. The basic objective is to create an interactive computer-to-user communication program that, with minimal help, enables the learning objectives to be met in a shorter time than would be necessary with laboratory tests. In this sense, the design of these programs—avoiding the concept of the ‘black box’—allows the user to access the choice of a large number of parameters associated with programming and design of the model, with the purpose of determining the potential influence of them in numerical results.

The ‘network simulation’ research group of the UPCT (Technical University of Cartagena) has significant experience in software development, in the fields of mechanical engineering and coupled flow and transport processes, such as: (i) Program for Designing Simple Fins (PRODASIM) and Program for Heat Conduction (PROCCA-09), for the assembling of transient heat transfer in fins [1]; (ii) Flow and Transport Simulator (FATSIM-A), for the simulation of flow and transport processes [2]; and (iii) Coupled Ordinary Differential Equations by Network Simulation (CODENS_13), for the simulation of mechanical models governed by coupled ordinary differential equations [3]. All of them are available and have been used as tools for numerous research works [4,5], but require a license to

use the Personal Computer Simulation Program with Integrated Circuit Emphasis (Pspice), which is responsible for performing the numerical calculations.

In this work we present the free program SICOMED_2018 [6], a code for the simulation of transient problems of soil consolidation with the use of prefabricated vertical drains to accelerate the settlement process, easy to use but with numerous applications within the field of civil engineering. The possibility of selecting not only the value of any of the physical parameters involved, with heterogeneous soils of up to three layers, but also those associated with the grid size and the numerical computation parameters allows the user to address specific consolidation scenarios—determining the separate influence of each of the parameters involved—as well as to solve optimization problems such as the relationship between the consolidation time and the depth of the drain. On the other hand, the powerful graphic output environment of the program allows us to visualize and interpret results in a direct and simple way. For these reasons, SICOMED_2018 is presented as a complete software package, with novel contributions, that joins other specific programs for learning the theory and practice of soil consolidation such as Consolidation Testing and Multimedia (CTM) [7].

The performance of SICOMED_2018, which can be acquired through UPCT (Technical University of Cartagena), requires the installation of the free code Ngspice [8]. The graphical communication environment has been developed with MATLAB (under a license that allows its distribution), a very widespread code at a scientific and professional level that has highly developed tools to create user interfaces, while the powerful computational algorithms of Ngspice provide the nearly exact solution of the network model of the consolidation process, whose design is based on the analogy between electric and physical quantities. The design of the numerical model follows the rules of the network simulation method [9], a tool widely known in the scientific world for the implementation of network models. Each term in the equation is an electric current that is balanced with the other terms in a common node of the volume element whose voltage is the solution of the potential quantity (pressure) of the governing equation. A mesh size of the order of 50 volume elements, in one-dimensional (1D) problems, reduces errors with respect to analytical solutions to below 1% [10], which is acceptable for this type of engineering problem. Illustrative applications are presented to demonstrate the efficiency and reliability of the program.

2. Fundamentals of Soil Consolidation with Prefabricated Vertical Drains and Network Model

Prefabricated vertical drains (PVD) are a system of soil drainage commonly used in civil engineering in problems of soil consolidation in which the goal is to accelerate final settlement. When a fully saturated clay soil is subjected to the action of loads on its surface, it begins to experience a decrease in volume or settlement over a generally long period, in a transitory process commonly known as consolidation. This volume reduction is due to the gradual expulsion of part of the water contained in the voids between the soil particles, through one or more draining boundaries (generally across the ground surface), as the excess pore pressure initially generated by the applied load is transmitted to the soil, increasing the effective pressure on it.

In real scenarios, with ground of considerable thickness and low permeability, the main problem facing the civil engineer is the long consolidation times needed to reach final settlement (on the order of years). For this reason, the installation of PVD is a good solution to reduce the time of consolidation of a soil, as we are significantly shortening the drainage length of the water.

Assuming the hypotheses postulated by Terzaghi [11]—(i) both water and soil particles are assumed incompressible; (ii) the ground self-weight is neglected; (iii) the excess pore pressure (u) is caused by the application of the external load (q), constant over time; (iv) the fluid movement in the porous medium is assumed to obey the law of Darcy; (v) the soil skeleton does not creep under the action of a constant effective pressure; (vi) the change in soil thickness in relation to its total volume (hypothesis of $1 + e$ constant) is considered negligible; (vii) there is uniform applied load, so that the soil deformation only occurs in the vertical direction; (viii) the geotechnical parameters of the soil, included in the consolidation coefficient c_v , remain constant; and (ix) the soil rests on an impermeable

stratum—so that water drains only by the ground surface (water flow only in the vertical direction), the governing equation and boundary conditions for the 1D linear soil consolidation problem are given by

$$\frac{\partial u}{\partial t} = c_v \left(\frac{\partial^2 u}{\partial z^2} \right) \tag{1}$$

$$u_{(z=0,t)} = 0 \text{ Surface drainage condition} \tag{2}$$

$$\frac{\partial u}{\partial z} (z=H,t) = 0 \text{ Impermeable bottom edge} \tag{3}$$

$$u_{(z,t=0)} = u_o = q \text{ Initial condition.} \tag{4}$$

The analytical solution for a single layer of soil can be found in several works [12,13], providing solutions for the local degree of settlement (U) for any depth and instant of time, as well as the average degree of settlement (\bar{U}) at any time.

The installation of PVD, made of geosynthetic material, allowing drainage through them, involves the transformation of the 1D problem into a three-dimensional (3D) problem, since the direction or flow of water occurs in any of the three spatial directions (x, y, z). By adopting a rectangular layout (Figure 1), which allows us to obtain volume elements of rectangular geometry, the mathematical model for the typical section (Figure 2) is governed by the following equations:

$$\frac{\partial u}{\partial t} = c_{v,z} \left(\frac{\partial^2 u}{\partial z^2} \right) + c_{v,x} \left(\frac{\partial^2 u}{\partial x^2} \right) + c_{v,y} \left(\frac{\partial^2 u}{\partial y^2} \right) \text{ Governing equation} \tag{5}$$

$$u_{(x,y,z=0,t)} = u_{(0 \leq x \leq c, y=0, 0 \leq z \leq d, t)} = 0 \text{ Soil surface and drainage area of the PVD} \tag{6}$$

$$\left(\frac{\partial u}{\partial n} \right)_{\text{rest of the boundaries}} = 0 \text{ Impermeable edges} \tag{7}$$

$$u_{(x,y,z,t=0)} = u_o \text{ Initial condition,} \tag{8}$$

where $\frac{\partial u}{\partial n}$ represents the partial derivative in a direction normal to the boundary surface.

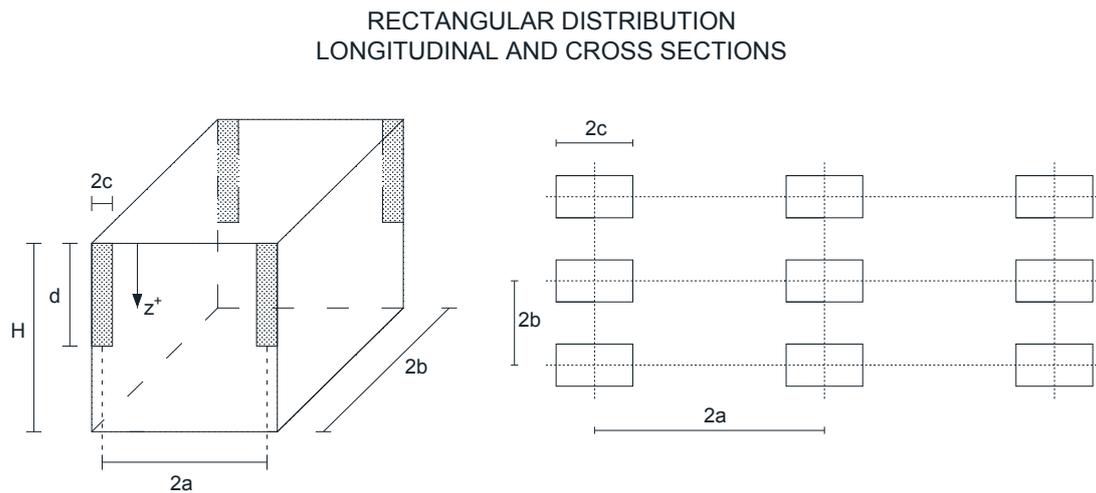


Figure 1. 3D rectangular consolidation problem with prefabricated vertical drains. Rectangular layout. Physical scheme (left) and section of the model (right).

Assuming isotropy in the (x, y) horizontal directions (a common feature of soil behavior), Equation (5) can be simplified to

$$\frac{\partial u}{\partial t} = c_{v,z} \left(\frac{\partial^2 u}{\partial z^2} \right) + c_{v,h} \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right). \quad (9)$$

At this point, it is important to note that, as in the linear theory of Terzaghi [11], the consolidation coefficients $c_{v,z}$ and $c_{v,h}$ of the governing Equation (9) have been assumed constant. As is well known, this is not entirely true, since in practice the soil properties (k_v , k_h , e and a_v) that are grouped by these coefficients ($c_{v,z} = \frac{k_v(1+e)}{\gamma_w a_v}$, $c_{v,h} = \frac{k_h(1+e)}{\gamma_w a_v}$) are not constant, but they vary during the consolidation process, a phenomenon that began to be analyzed many years ago by Davis and Raymond [14] and many other authors of the time. At present there are numerous publications and research that incorporate the non-linearity of these coefficients in the mathematical models, although it is also true that, for the usual practical values of the surface applied load (q), the changes in properties that give rise the consolidation coefficients ($c_{v,z}$ and $c_{v,h}$) are small (and the variations in these properties may even compensate for each other), so that the final result is practically constant consolidation coefficients. In effect, the non-linearity of these coefficients grows the higher the σ'_f/σ'_o quotient, a ratio that, though it theoretically can reach any value, in practice very rarely exceeds the value of 2 (or, at most, 2.5); a value below which the difference between the solutions provided by the linear and non-linear models is practically insignificant [15]. In this way, the smearing effects produced by the introduction of the vertical drain are reflected in the mathematical model in a very simple way, since, in practice, the soil property that is affected by the smear, for the purposes of the consolidation coefficient, is the hydraulic conductivity [16–18]. So, and for the area of soil that is considered to be affected by the smear effects, the hydraulic conductivity values of the smear zone ($k_{v,s}$ and $k_{h,s}$) must simply be assigned.

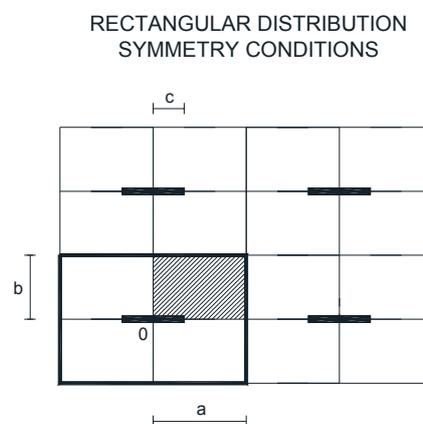


Figure 2. Symmetry conditions of the rectangular layout.

The set of Equations (6)–(9) has a complex analytical solution (from the point of view of the management for the civil engineer), so it is presumed much more appropriate to solve them by numerical methods.

Network Model

The network method is a technique for the study and numerical solution of any physical processes that can be defined by a mathematical model. Starting from the latter, the procedure consists of two stages: (i) elaborate a “network model” or electrical circuit equivalent to the process, and (ii) numerically simulate the model by means of an adequate electrical circuits resolution code. Its applications are multiple; González-Fernández [9] uses the network method in solving transport

problems through membranes, heat transfer and electrochemical systems. In recent years it has been successfully applied in other engineering fields such as elastic waves [19], material resistance [20], corrosion [21], magneto-hydrodynamics [22], flow and transport [4], tribology [23], mechanical problems and chaos [24]. On the other hand, among the future research lines in which the network method can be used we find: seepage [25], real-life case models in hydrologic engineering [26–29], and atmospheric dispersion of pollutants [30,31], some of them already in the development phase.

The formal equivalence between the network model and the physical process is that both are governed by the same equations (discretized in space, but retaining time as a continuous variable), establishing a correspondence between the dependent variables of the problem, pressure and water flow in the physical model, and the electrical variables of the circuit, voltages, and currents. That is, both models are governed by the same equations referred to a volume (or cell) element and by the same discrete equations for the boundary conditions. Consequently, the errors from the simulation are only attributable to the geometric mesh size, so that for an acceptable number of cells (of the order of 50 in 1D scenarios, 4000 for 3D problems) errors are much less than 1% in linear problems [10]. The powerful computation codes for the numerical resolution of circuits provide the exact solution of these thanks to an optimal selection of the calculation time steps, imposed by the Ngspice code or by the user.

In terms of the first spatial derivative, Equation (9) is written in the form

$$\frac{\partial u}{\partial t} = c_{v,z} \frac{\partial}{\partial z} \left\{ \left[\frac{\partial u}{\partial z} \right]_{z^+} - \left[\frac{\partial u}{\partial z} \right]_{z^-} \right\} + c_{v,h} \frac{\partial}{\partial x} \left\{ \left[\frac{\partial u}{\partial x} \right]_{x^+} - \left[\frac{\partial u}{\partial x} \right]_{x^-} \right\} + c_{v,h} \frac{\partial}{\partial y} \left\{ \left[\frac{\partial u}{\partial y} \right]_{y^+} - \left[\frac{\partial u}{\partial y} \right]_{y^-} \right\}, \quad (10)$$

where z^+ and z^- denote the cell output and input locations in the z -direction, and the same for x^+ and x^- in the x -direction and for y^+ and y^- in the y -direction.

Dividing the medium into $N_x \times N_y \times N_z$ volume elements of size $\Delta x \times \Delta y \times \Delta z$, and using the nomenclature of Figure 3, the above equation can be written in the form

$$\frac{\partial u}{\partial t} = c_{v,z} \frac{1}{\Delta z} \left\{ \left[\frac{u_{i+\Delta z} - u_i}{\frac{\Delta z}{2}} \right] - \left[\frac{u_i - u_{i-\Delta z}}{\frac{\Delta z}{2}} \right] \right\} + c_{v,h} \frac{1}{\Delta x} \left\{ \left[\frac{u_{i+\Delta x} - u_i}{\frac{\Delta x}{2}} \right] - \left[\frac{u_i - u_{i-\Delta x}}{\frac{\Delta x}{2}} \right] \right\} + c_{v,h} \frac{1}{\Delta y} \left\{ \left[\frac{u_{i+\Delta y} - u_i}{\frac{\Delta y}{2}} \right] - \left[\frac{u_i - u_{i-\Delta y}}{\frac{\Delta y}{2}} \right] \right\} \quad (11)$$

or

$$\frac{\partial u}{\partial t} = \left[\frac{u_{i+\Delta z} - u_i}{\frac{(\Delta z)^2}{2c_{v,z}}} \right] - \left[\frac{u_i - u_{i-\Delta z}}{\frac{(\Delta z)^2}{2c_{v,z}}} \right] + \left[\frac{u_{i+\Delta x} - u_i}{\frac{(\Delta x)^2}{2c_{v,h}}} \right] - \left[\frac{u_i - u_{i-\Delta x}}{\frac{(\Delta x)^2}{2c_{v,h}}} \right] + \left[\frac{u_{i+\Delta y} - u_i}{\frac{(\Delta y)^2}{2c_{v,h}}} \right] - \left[\frac{u_i - u_{i-\Delta y}}{\frac{(\Delta y)^2}{2c_{v,h}}} \right]. \quad (12)$$

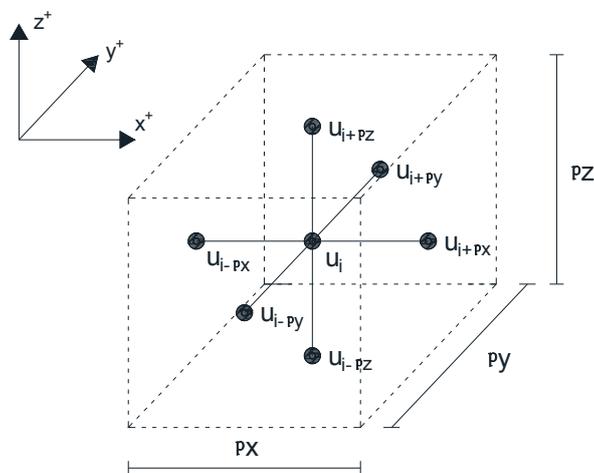


Figure 3. Nomenclature of the element cell of the 3D rectangular consolidation model.

Each of the terms in the above equation is a flow:

$$\begin{aligned} j_C = \frac{\partial u}{\partial t}, \quad j_{R+\Delta z} = \frac{u_{i+\Delta z} - u_i}{\frac{(\Delta z)^2}{2c_{v,z}}}, \quad j_{R-\Delta z} = \frac{u_i - u_{i-\Delta z}}{\frac{(\Delta z)^2}{2c_{v,z}}}, \quad j_{R+\Delta x} = \frac{u_{i+\Delta x} - u_i}{\frac{(\Delta x)^2}{2c_{v,h}}}, \quad j_{R-\Delta x} = \frac{u_i - u_{i-\Delta x}}{\frac{(\Delta x)^2}{2c_{v,h}}}, \\ j_{R+\Delta y} = \frac{u_{i+\Delta y} - u_i}{\frac{(\Delta y)^2}{2c_{v,h}}}, \quad j_{R-\Delta y} = \frac{u_i - u_{i-\Delta y}}{\frac{(\Delta y)^2}{2c_{v,h}}} \end{aligned} \quad (13)$$

so that Equation (12) can be written as a flow balance:

$$j_C = j_{R+\Delta z} - j_{R-\Delta z} + j_{R+\Delta x} - j_{R-\Delta x} + j_{R+\Delta y} - j_{R-\Delta y}. \quad (14)$$

In the electric analogy, by establishing associations between variables so that the excess pore pressure (u) is equivalent to the electrical voltage (V) while the temporal (first derivative) and spatial changes (second derivative) of u are two electric currents (J), we have:

$$j_{R+\Delta z} = \frac{u_{i+\Delta z} - u_i}{\frac{(\Delta z)^2}{2c_{v,z}}}, \quad (15)$$

which is equivalent to Ohm's law, which relates the current (I_R) in a resistance with the voltage (V_R) at its ends (terminals):

$$I_R = \frac{V_R}{R}. \quad (16)$$

Thus, the implementation of Equation (15) is carried out by the resistance between the central node and the upper edge of the cell (Figure 3). The value of this resistance is

$$R_{i+\Delta z} = \frac{(\Delta z)^2}{2c_{v,z}}. \quad (17)$$

By the same reasoning, the term

$$j_{R-\Delta z} = \frac{u_i - u_{i-\Delta z}}{\frac{(\Delta z)^2}{2c_{v,z}}} \quad (18)$$

is implemented by a new resistor of the same value as Equation (17) between the central node and the lower edge of the cell. Finally, the term

$$j_C = \frac{\partial u}{\partial t} \quad (19)$$

is equivalent to the equation that relates the electric current at a capacitor (I_C) to the voltage or potential difference at its ends (V_C):

$$I_C = C \left(\frac{\partial V_C}{\partial t} \right). \quad (20)$$

Thus, the implementation of this term of Equation (12) is carried out by a capacitor C of value unity connected between the central node and an outer node (which will be the common reference node for all cells). In short, the values of the electrical devices that implements the model of the volume element, whose network is depicted in Figure 4, are

$$C = 1, R_{i+\Delta z} = R_{i-\Delta z} = \frac{(\Delta z)^2}{2c_{v,z}}, R_{i+\Delta x} = R_{i-\Delta x} = \frac{(\Delta x)^2}{2c_{v,h}}, R_{i+\Delta y} = R_{i-\Delta y} = \frac{(\Delta y)^2}{2c_{v,h}}. \quad (21)$$

Notice that, physically, an increase in the consolidation coefficient decreases the value of the resistances and makes the consolidation process faster, as expected.

Each cell of the domain is connected to the adjacent cells by means of ideal electrical contacts. As regards the boundaries, a second-type Neumann (homogeneous) condition is adopted at the

impermeable edges, which is simply implemented by a resistance of infinite value, while a first-type Dirichlet condition (constant pressure) is assumed at the draining boundaries (soil surface and drainage area of the PVD), which is implemented by a constant voltage source of zero value.

Finally, the drain discharge capacity (q_w) limitation caused by the unit gradient of pressure at the drain is modeled by fixing the drain permeability (hydraulic conductivity) to the required value. Note that this solution allows us to increase the flow of water through the drain as the water moves towards the exit border of the drain.

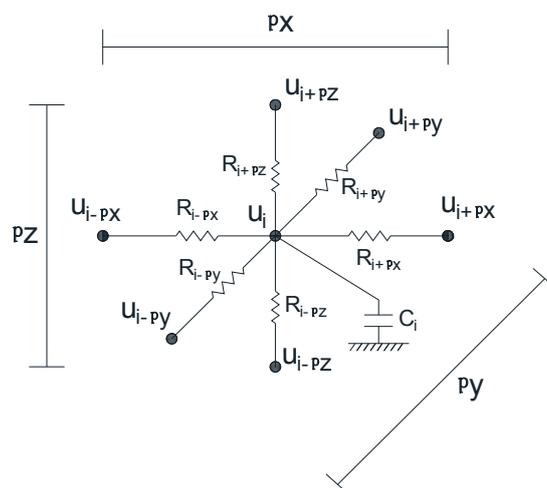


Figure 4. Network model of the element cell (3D rectangular consolidation).

3. The Simulation Program

The objective of this program (SICOMED_2018) is the simulation of the 3D consolidation problem with partially or totally penetrating PVD, in heterogeneous soils formed by one, two, or three layers and taking into account the effects of the smear zone and the discharge capacity of the drain. It must be an easy-to-use software for the user but able to provide powerful numerical calculations. This requirement entails the creation of a practical and simple graphical interface, where data entry and choice of the different options is performed in an orderly, intuitive, and guided way. Also, the program should include a complete guide [32] that allows the user to understand the successive steps in data entry, simulation and representation of results.

With regard to the simulation possibilities, the user can use SICOMED_2018 both to design and to optimize the installation of PVD in the ground, since the program allows us to know, in a simple way, the great variety of results that will allow engineers to make the decisions that most suit their needs: evolution of settlements on the soil surface, excess pore pressure at any point of the ground, and average degree of settlement, among others.

3.1. The Input Data and Network Design

Data entry is carried out through the following three windows that appear successively as they are completed (Figures 6–8). The start-up screen (Figure 6), allows the entry of the problem geometry (values a , b , and c in Figure 2), the definition of the smear zone, and the desired grid size in plant. In the second window (Figure 7), the geometry of the strata (thickness and vertical grid size), parameters to define the consolidation coefficients (both the undisturbed and the smear zone), the depth of the PVD, and its discharge capacity are introduced. Finally, in the third screen (Figure 8), parameters related to the simulation such as the value of the uniform applied load, initial and final calculation times, the maximum time step between each iteration, and a relative tolerance parameter used by Ngsipce to achieve the convergence are introduced. As a unit of measure of time, the year (y) has been

chosen, a more appropriate magnitude than the second(s) for this type of problem, while for the other magnitudes the units of the international system have been maintained.

Figure 5 shows a simplified scheme of the SICOMED_2018 flowchart.

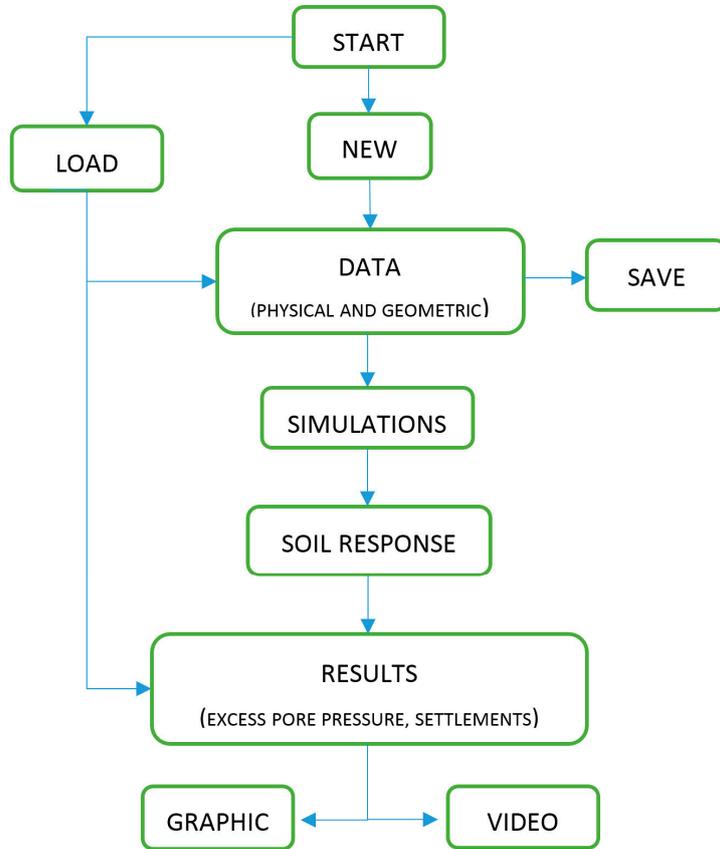


Figure 5. Operating scheme of SICOMED_2018.

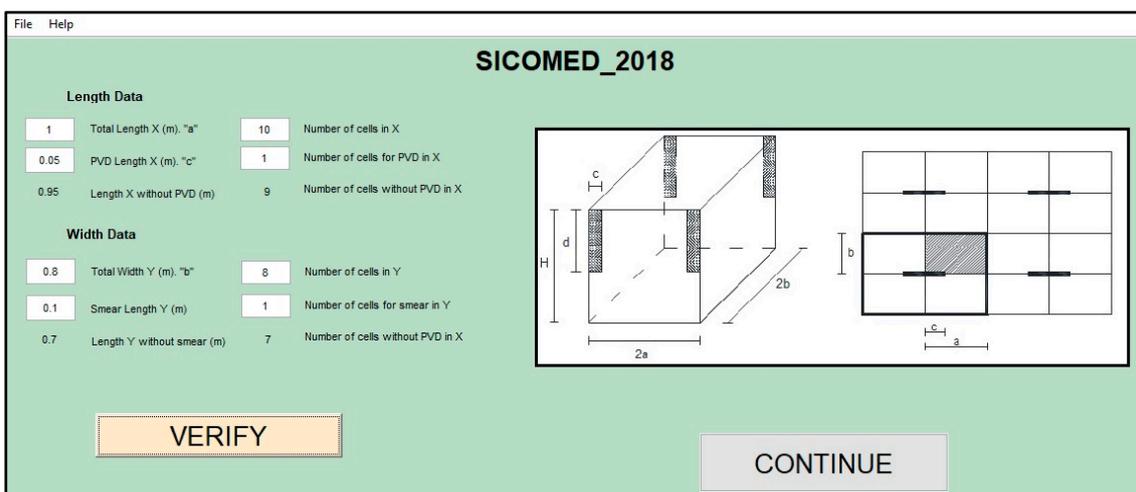


Figure 6. SICOMED_2018 start-up screen.

Number of layers
 APPLY 3 (Layers already selected)

Thicknesses and numbers of cells

LAYER 1 DATA		LAYER 2 DATA		LAYER 3 DATA	
<input type="text" value="1"/>	Thickness of top layer (m)	<input type="text" value="2"/>	Thickness of intermediate layer (m)	<input type="text" value="1"/>	Thickness of bottom layer (m)
<input type="text" value="5"/>	Number of cells in Z (top layer)	<input type="text" value="10"/>	Number of cells in Z (intermediate layer)	<input type="text" value="5"/>	Number of cells in Z (bottom layer)
<input type="text" value="4"/>	Total Thickness (m). "H"	<input type="text" value="20"/>	Total Number of cells in Z		

Cvi and Chi Data
 Known Kvi, Khi, e0i &... **APPLY** 2 (Cv option selected)

Coefficients of permeability (hydraulic conductivity), coefficients of compressibility and initial void ratios

<input type="text" value="0.02"/>	kv of top layer (m/year)	<input type="text" value="0.06"/>	kv of intermediate layer (m/year)	<input type="text" value="0.04"/>	Kv of bottom layer (m/year)
<input type="text" value="0.04"/>	kh of top layer (m/year)	<input type="text" value="0.12"/>	kh of intermediate layer (m/year)	<input type="text" value="0.08"/>	Kh of bottom layer (m/year)
<input type="text" value="5.7e-06"/>	av of top layer (m ² /N)	<input type="text" value="4e-06"/>	av of intermediate layer (m ² /N)	<input type="text" value="3.7e-06"/>	av of bottom layer (m ² /N)
<input type="text" value="1.5"/>	e0 of top layer	<input type="text" value="1.25"/>	e0 of intermediate layer	<input type="text" value="1"/>	e0 of bottom layer
<input type="text" value="0.895095"/>	Cv of top layer (m ² /year)	<input type="text" value="3.44388"/>	Cv of intermediate layer (m ² /year)	<input type="text" value="2.20629"/>	Cv of bottom layer (m ² /year)
<input type="text" value="1.79019"/>	Ch of top layer (m ² /year)	<input type="text" value="6.88776"/>	Ch of intermediate layer (m ² /year)	<input type="text" value="4.41258"/>	Ch of bottom layer (m ² /year)

Smear effect on kv and kh (0 = impermeable; 1 = no reduction)

<input type="text" value="0.32"/>	kv reduction (top layer)	<input type="text" value="0.34"/>	kv reduction (top layer)	<input type="text" value="0.45"/>	kv reduction (interm. layer)	<input type="text" value="0.29"/>	kv reduction (interm. layer)	<input type="text" value="0.61"/>	kv reduction (bottom layer)	<input type="text" value="0.55"/>	kv reduction (bottom layer)
-----------------------------------	--------------------------	-----------------------------------	--------------------------	-----------------------------------	------------------------------	-----------------------------------	------------------------------	-----------------------------------	-----------------------------	-----------------------------------	-----------------------------

Drain resistance effect k of the drain (m/year)

Penetration of the drain
 Partially penetrating into the top layer 1 (PVD option selected)

Drain depth of penetration in the top layer (m). "d" WARNING! Must be slower than 1 (m)

Number of cells of the drain WARNING! Must be slower than 5

VERIFY **VERIFY DRAIN**

Thickness of top layer without drain (m)

Number of cells of top layer without drain

BACK **CONTINUE**

Figure 7. Second data entry screen.

Simulation Data

Uniform Load
 (N/m²)

Initial Time (Years) Final Time (Years)

Time increment for each iteration (approx.)
 (Years)

RELTOL (determines convergence across iterations)

BACK **RUN**

Figure 8. Third data entry screen.

3.2. Simulation and Output Data

To increase the flexibility and effectiveness of the program, the user can avoid entering data by working with another file previously saved. For this, SICOMED_2018 includes the options of saving and loading data. Once all the data have been entered or loaded the simulation can start. To do this, SICOMED_2018 creates the network model file in a specific source code that is run in Ngspice. At the end of the simulation the user can access the results given in a graphic way. SICOMED_2018 offers up to six possibilities of results representation (Figure 9), conveniently arranged so that the geotechnical engineer can have all the necessary information in a simple, precise form:

1. Excess pore pressure in a given column of the soil
2. Excess pore pressure in a given point of the soil
3. Average degree of settlement
4. Local settlements in a given column of the soil
5. Total settlement in a given point of the surface
6. Surface settlements animation.

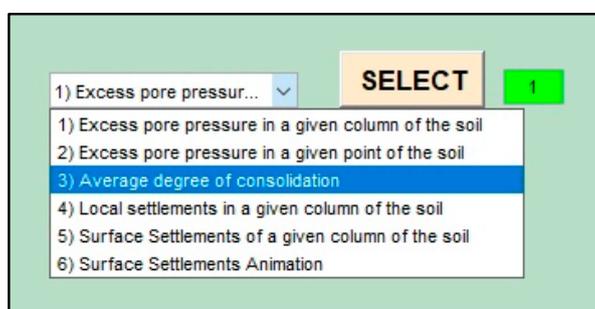


Figure 9. Representation selection screen.

Some of these representations are shown in the illustrative applications of the following section, which have been selected with the aim of presenting all the potentialities and utilities of SICOMED_2018, such as: (i) analysis of classic consolidation problems; (ii) real scenarios of PVD layout optimization; (iii) inclusion of the smearing and drain discharge capacity effects; and (iv) verification of results.

4. Applications

4.1. First Scenario: Consolidation of a One-Layer Soil with PVD

This application refers to a fixed one-layered consolidation scenario in which the PVD layout is already imposed. The geometry of the problem and the soil properties are shown in Table 1 (note that the PVD thickness, t_d , is not given, as this parameter does not have an influence when the smear and drain discharge capacity effects are not considered, as in this case). The final time of the simulation has been set at four years, while the chosen time step is 0.01 years. Finally, a $20 \times 16 \times 20$ grid has been chosen, enough to guarantee precision in the results, with relative errors below 1%.

Table 1. Geometry of the problem and soil properties.

Thickness (H)	3 m
Separation between PVDs (2a)	2 m
Separation between rows of PVDs (2b)	1.6 m
PVD width (2c)	0.1 m
Depth of penetration of PVD (d)	3 m
Applied load (q)	30 kN/m ²
Initial void ratio (e_0)	1.23

Table 1. Cont.

Compressibility coefficient (a_v)	0.0023 m ² /kN
Vertical hydraulic conductivity (k_v)	0.0095 m/year
Horizontal hydraulic conductivity (k_h)	0.0259 m/year
Vertical consolidation coefficient ($c_{v,z}$)	0.94 m ² /year
Horizontal consolidation coefficient ($c_{v,h}$)	2.56 m ² /year

At this point it is important to note that SICOMED_2018 has the option to directly enter the values of the consolidation coefficients ($c_{v,z}$ and $c_{v,h}$), allowing only the analysis of the problem in terms of the duration of the process (options 1, 2, and 3 in Figure 9), or provide the values of the soil parameters (a_v , e_o , k_v and k_h) from which these coefficients are deduced—Equation (22)—allowing this second option to perform an analysis of the problem in terms of settlement (options 4, 5, and 6 in Figure 9):

$$c_{v,z} = \frac{k_v(1 + e)}{w a_v}, \quad c_{v,h} = \frac{k_h(1 + e)}{w a_v} \tag{22}$$

Once the simulation is run, with a computation time of 10 min on an Intel Core i7-6700 CPU 4.00 GHz computer, the user can access the results (Figure 9). The excess pore pressure can be represented for all the cells of one or two soil columns, given to the program by their (X, Y) coordinates (Figure 10). As can be seen, the dissipation of the excess pore pressure (Figure 11) occurs faster in those points of the soil closer to the draining edges, soil surface, and PVD. The program also allows (option 2) the representation of the evolution of this unknown in one, two, or three locations, indicated to the SICOMED_2018 by its (X, Y, Z) coordinates.

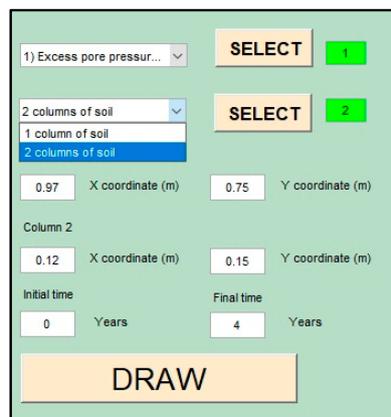


Figure 10. Selection of soil columns to be represented and time interval.

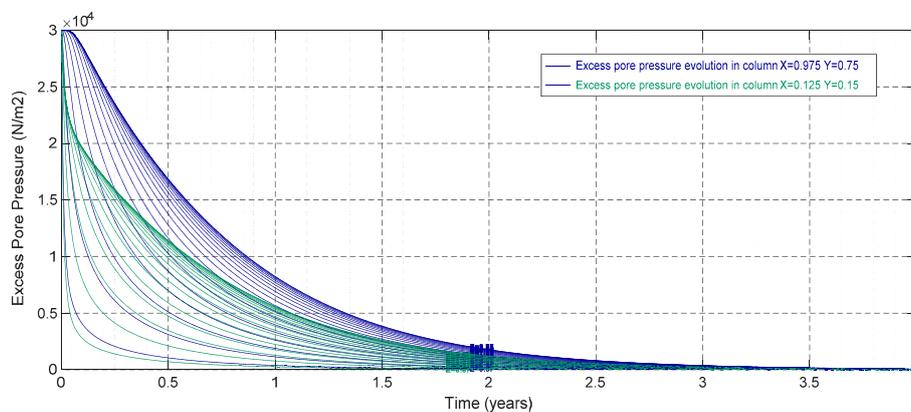


Figure 11. Excess pore pressure evolution in two soil columns ($N_z = 20$).

The evolution of the average degree of settlement (the degree of consolidation averaged over all soil columns) is shown in Figure 12. Thus, it can be observed that 90% of the consolidation is reached after 1.30 years.

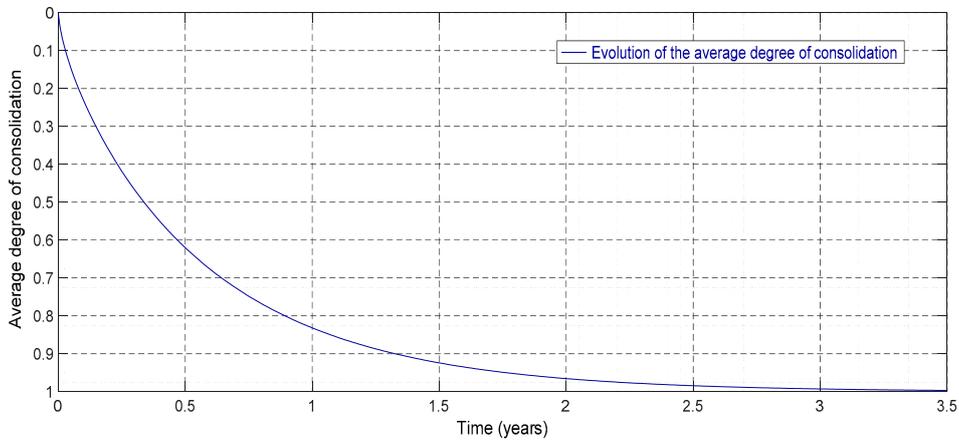


Figure 12. Average degree of settlement evolution.

Options 4–6 of Figure 9 are also available (Figures 13–15) since parameters a_v , e_o , k_v , and k_h are given. Note that the soil columns closer to the PVD will reach the final settlement before (Figure 14), although the value of this unknown is the same for all the columns: 0.0927 m.

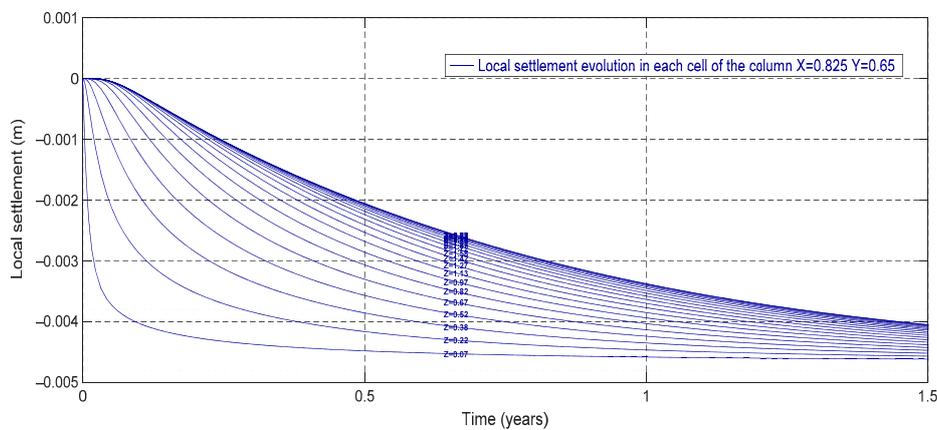


Figure 13. Evolution of the local settlement in each of the cells of a soil column ($N_z = 20$).

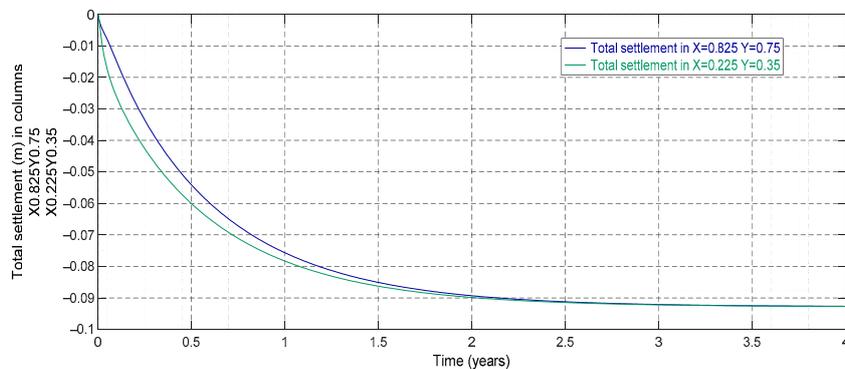


Figure 14. Surface settlement evolution of two soil columns.

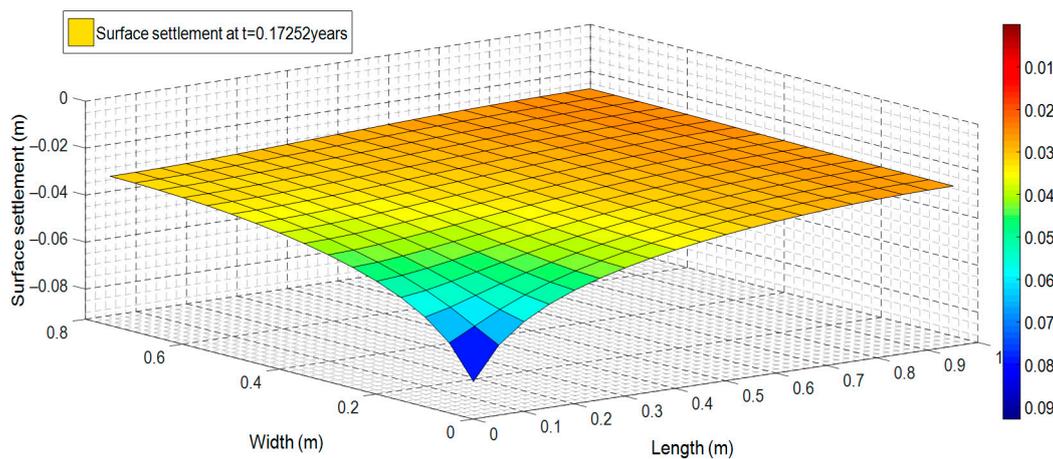


Figure 15. Screenshot of the settlement evolution animation on the ground surface.

The last representation option (Figure 15) is a video animation of the settlement evolution of the whole soil surface. As representation options, the user can choose the time interval to display and the number of frames per second of the animation (for faster or slower display).

4.2. Second Scenario: Optimization of PVD Layout

In this application we analyze and accelerate the process of consolidation of a three-layered soil (whose properties are given in Table 2) on which an embankment is going to be built, transmitting to the ground a uniform load of 60 kN/m². Using SICOMED_2018, different layouts (depth of penetration and separation of PVDs) will be simulated (with different final and step times, depending on the case), looking for the optimal solution from the point of view of consolidation time. A 10 × 10 × 30 grid has been chosen (0.2 m high in each cell).

Table 2. Thickness and properties of the three strata.

Soil Property		S ₁ (Upper Stratum)	S ₂ (Intermediate Stratum)	S ₃ (Lower Stratum)
Thickness (m)	H	1	3	2
Initial void ratio	e _o	1.5	0.9	0.7
Compressibility coefficient (m ² /kN)	a _v	0.0075	0.0028	0.00125
Vertical hydraulic conductivity (m/year)	k _v	0.007	0.015	0.006
Horizontal hydraulic conductivity (m/year)	k _h	0.022	0.04	0.01
Vertical consolidation coefficient (m ² /year)	c _{v,z}	0.24	1.04	0.83
Horizontal consolidation coefficient (m ² /year)	c _{v,h}	0.75	2.77	1.39

To address this problem it is necessary to set a definition for the consolidation time (or characteristic time, t₀ [33]), as well as to fix a target value of this time to be achieved with the use of PVDs. So, we define the characteristic time as the time that takes the soil to reach an average degree of settlement (\bar{U}) of 90%. In addition, PVDs must reduce this time to a value below two years. In this way, we proceed to perform the simulation of the problem in the most unfavorable scenario, that is, when there are no PVDs installed in the ground. For this case (Figure 16), 90% of the average degree of settlement is achieved after more than 30 years, a value too high for work in civil engineering.

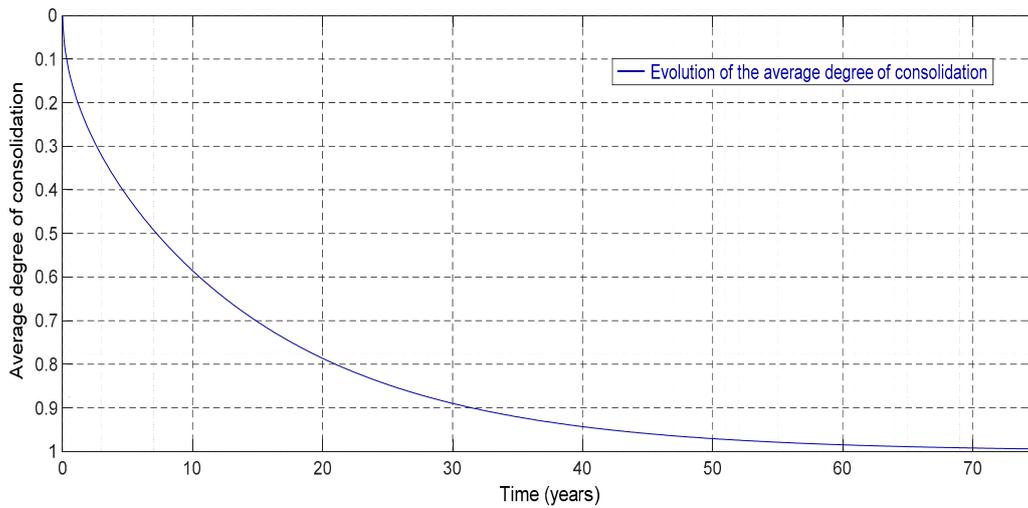


Figure 16. Average degree of settlement for the case with no PVDs.

Figure 17 shows the local settlement evolution of an entire soil column, which is different for each stratum. The simulation also provides a final surface settlement value of 0.53 m.

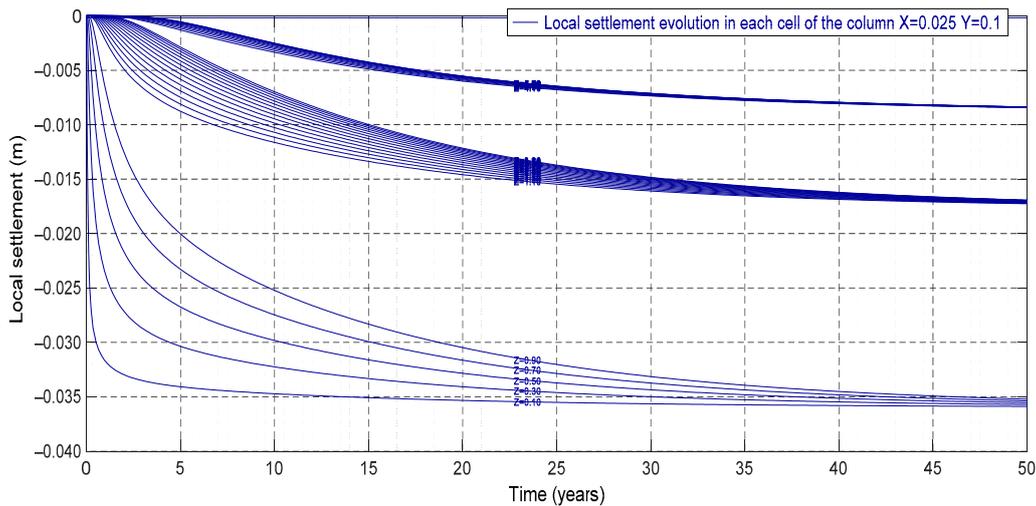


Figure 17. Local settlements evolution for the case with no PVDs ($N_z = 30$).

In order to reduce the consolidation time, PVDs separated every 2 m (both at x and y spatial directions) are installed. The width of the PVD is 0.1 m, a typical commercial value for this type of drain of geosynthetic origin. As depth of penetration we begin with $d = 1$ m (partially penetrating drain to the first layer). As the reduction of t_0 is not enough, we increase the penetration up to 4 m (partially penetrating drain to the intermediate stratum) and 6 m (totally penetrating drain). The results for the consolidation time (t_0) are shown in Table 3.

Table 3. Values of t_0 as a function of PVD penetration ($a = 1$ m; $b = 1$ m; $c = 0.05$ m).

Depth of PVD (m)	t_0 (Years)
Without drain	32
1	27
4	4.5
6	3

Since none of the studied options fits the two-year objective, it is necessary to bring PVDs closer. Thus, for the cases $d = 6\text{ m}$ and $d = 4\text{ m}$, a set of simulations in which both the distance between PVDs and the separation between rows of PVDs are reduced will be simulated with SICOMED_2018. Characteristic times for each layout are summarized in Table 4.

Table 4. Values of t_0 as a function of PVD penetration and surface layout ($c = 0.05\text{ m}$).

Depth of PVD (m)	t_0 (Years)
Without drain	32
1 (a = b = 1 m)	27
4 (a = b = 1 m)	4.5
6 (a = b = 1 m)	3
6 (a = b = 0.9 m)	2.4
6 (a = b = 0.8 m)	1.9
4 (a = b = 0.8 m)	2.5
4 (a = b = 0.7 m)	2.0
4 (a = b = 0.65 m)	1.8

In view of these results, two alternatives emerge as a solution to the problem: (i) totally penetrating drains every 1.6 m (2 linear meters of PVD per square meter of soil surface), which provides a characteristic time of 1.9 years; and (ii) partially penetrating drains (4 m) every 1.4 m (1.75 linear meters of PVD per square meter of soil surface), which provides a characteristic time of 2.0 years. Figures 18 and 19 illustrate the last alternative showing, respectively, the local settlements and total surface settlement evolution for two soil columns.

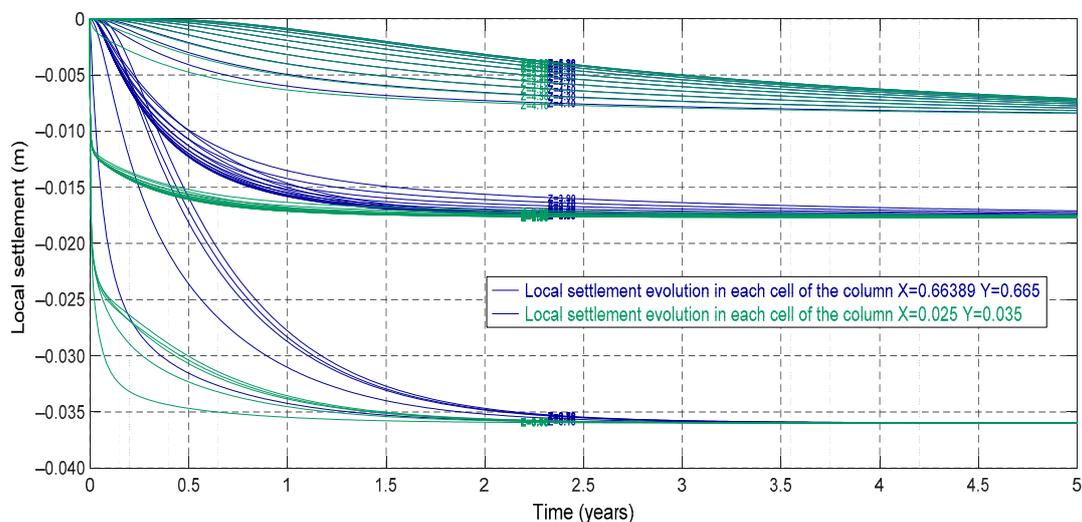


Figure 18. Local settlement evolution in each of the cells of two soil columns. ($a = b = 0.7\text{ m}$; $c = 0.05\text{ m}$; $d = 4\text{ m}$).

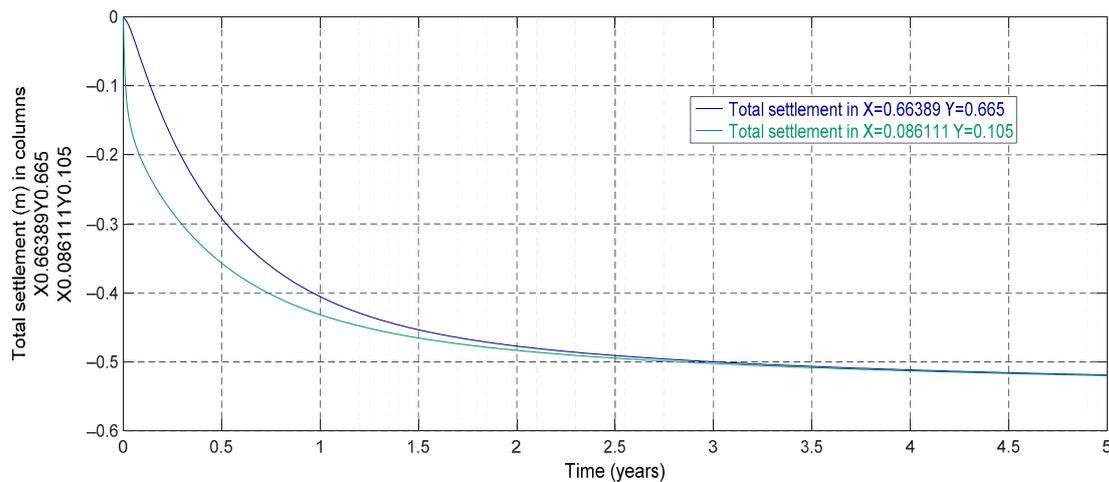


Figure 19. Surface settlement evolution in two soil columns. (a = b = 0.7 m; c = 0.05 m; d = 4 m).

4.3. Third Scenario: Influence of the Smear Zone and the Discharge Capacity Limitation of the PVD

The third application addresses the use of limited discharge capacity drains, as well as the influence of the smear zone. The geometric characteristics and ground and drain properties are shown in Table 5. The geometric values of the problem (a, b, c, and t_d) have been selected so that the solutions of SICOMED_2018 can be compared with the results obtained by Hansbo et al. [16] and Barron [34], in the same problem but using a two-dimensional (2D) radial geometry, with an equivalent diameter of the PVD and a diameter of influence of 0.062 m and 0.95 m, respectively. The physical soil and drain properties are identical. Regarding a_v and e, any pair of values that provides the same consolidation coefficients is valid, having adopted the values of $a_v = 1.224 \times 10^{-5} \text{ m}^2/\text{N}$ and $e = 1$. Finally, $\Delta Q = 10.000 \text{ N/m}^2$.

Table 5. Geometry and physical properties of the problem.

Parameter/Soil Property	Value	Units
H (draining length)	15	m
2a (separation between PVDs)	0.785	m
2b (separation between rows PVDs)	0.739	m
2c (PVD width)	0.0924	m
t_d (PVD thickness)	0.005	m
PVD equivalent diameter	0.0620	m
Smear length (normal to the PVD plain)	0.0693	m
k_h (horizontal hydraulic conductivity of the undisturbed soil)	0.03	m/year
$k_{h,s}$ (horizontal hydraulic conductivity of the smear zone)	0.01	m/year
k_v (vertical hydraulic conductivity of the undisturbed soil)	0.009	m/year
$k_{v,s}$ (vertical hydraulic conductivity of the smear zone)	0.003	m/year
$c_{v,h}$ (horizontal consolidation coefficient)	0.5	m^2/year
$c_{v,z}$ (vertical consolidation coefficient)	0.15	m^2/year
Grid size (N_x, N_y, N_z)	$17 \times 16 \times 15$	
Drain hydraulic conductivity for $q_w = 20 \text{ m}^3/\text{year}$	43,290	m/year
Drain hydraulic conductivity for $q_w = 10 \text{ m}^3/\text{year}$	21,645	m/year
Drain hydraulic conductivity for $q_w = 5 \text{ m}^3/\text{year}$	10,822.5	m/year

Four consolidation scenarios have been simulated, comparing the average degree of consolidation achieved in three typical times: 0.5, one, and two years (Table 6). In the first case, in which the smear effects are not considered and the drain is supposed to have an infinite discharge capacity, the results reproduce those obtained analytically by Barron [34] under the free strain hypothesis,

with relative deviations below 3% for the three times. The other three cases assume the same smear length but consider different PVD discharge capacities. For them, the comparison is established with the results obtained by Hansbo et al. [16], based on their empirical expressions for the average degree of consolidation. Deviations, particularly for relatively high times, can be considered acceptable, taking into account that these are not numerical or analytical results. These deviations grow slightly to 11.6% for small times and low discharge capacities, perhaps because the models degrees of freedom (3D for SICOMED_2018 and 2D radial for Hansbo) are not the same. On the other hand, the results are coherent with respect to the correlation between the average degree of consolidation and the influence of both the smear effects and the discharge capacity limitation of the drain.

Table 6. Comparison of the average degree of consolidation between SICOMED_2018 and Hansbo et al. [16] and Barron's [34] solutions.

Case	t = 0.5 Years			t = 1 Years			t = 2 Years		
	Barron	Hansbo	SICOMED (% Error)	Barron	Hansbo	SICOMED (% Error)	Barron	Hansbo	SICOMED (% Error)
Case 1 No smear, limited discharge capacity	66.3%	-	68.1% (2.71%)	89.2%	-	89.6% (0.45%)	98.6%	-	98.9% (0.30%)
Case 2 Smear zone, $q_w = 20 \text{ m}^3/\text{year}$	-	46.0%	44.5% (-3.26%)	-	69.8%	68.8% (-1.43%)	-	90.5%	90.2% (-0.33%)
Case 3 Smear zone, $q_w = 10 \text{ m}^3/\text{year}$	-	41.8%	39.1% (-6.46%)	-	63.3%	62.5% (-1.26%)	-	86.0%	85.5% (-0.58%)
Case 4 Smear zone, $q_w = 5 \text{ m}^3/\text{year}$	-	34.5%	30.5% (-11.6%)	-	53.9%	50.9% (-5.57%)	-	77.9%	74.8% (-3.98%)

5. Final Comments and Conclusions

SICOMED_2018 has been created as free software for solving 3D consolidation problems with partial or totally penetrating vertical drains, in heterogeneous soils and considering the influence of the smear effects and the discharge capacity limitation of the drain. All the unknowns of interest for the civil engineer, such as the excess pore pressure evolution, the average degree of consolidation, local, and total settlements and even a video animation of the soil surface deformation, can be obtained with SICOMED_2018 in a relatively simple way. Therefore, it can be considered a program with professional, educational, and research applications.

Following network simulation method rules, SICOMED_2018 designs network models (electrical circuits) whose governing equations (with spatial discretization and retaining time as a continuous variable) are formally equivalent to the discretized equations of the consolidation problem. These network models are solved by an electrical circuit resolution code such as Ngspice, directly providing the solutions to the consolidation problem.

The program has been developed in a pleasant communication environment, both for the data entry and the graphical presentation of results, under a classic windows environment programmed with MATLAB, a code whose license is not free but allows the distribution of the programs created with it. On the other hand, for the numerical calculation the powerful computational algorithms integrated in Ngspice, an electrical circuits resolution free code that provides practically exact solutions to the models designed by SICOMED_2018, have been used. The combination of these codes has allowed us to obtain completely free software.

To illustrate the operation of the program, three applications, corresponding to real cases, are presented. The first one deals with the simulation and resolution of a consolidation scenario with the PVD distribution already imposed (a classic problem), showing the evolution of the main variables of interest (excess pore pressure, average degree of consolidation, and local and total settlements). The second one concerns an optimization problem in a soil formed by three strata

with different properties, in which it is sought to find the optimum PVD distribution in order to reduce the characteristic time of consolidation to a certain target value. Finally, the third application serves as a verification of the program against the analytical and empirical solutions provided by other authors, studying the influence that the smear zone and the discharge capacity limitation of the drain have on the consolidation problem. Deviations are reduced in all cases, showing the versatility and reliability of the program.

Finally, from the work presented here, a series of challenges that could be addressed in future research are suggested. On the one hand, in the field of soil consolidation, this research could be completed (or improved) by implementing additional options in the program, such as analysis based on real tabulated data, or even the possibility of addressing inverse problems. On the other hand, the wide experience of the 'network simulation' research group of the UPCT opens up the possibility of using a similar methodology in the creation of free software in disciplines as diverse as seepage, atmospheric dispersion of pollutants, and hydrologic engineering, among others.

Acknowledgments: The authors acknowledge the professors Francisco Alhama and Juan Francisco Sánchez, from the Applied Physics Department of the Technical University of Cartagena, for their help both in the development of the network models and in the elaboration of the graphic interface. The authors also thank the reviewers for the useful comments to improve the manuscript.

Author Contributions: Gonzalo García-Ros and Iván Alhama conceived and designed the software and wrote this paper, while Manuel Cánovas performed the numerical simulations and analyzed the results obtained.

Conflicts of Interest: The authors declare no conflict of interest.

Nomenclature

a	semi-separation between prefabricated vertical drains (m)
a_v	coefficient of compressibility (m^2/N)
b	semi-separation between rows of prefabricated vertical drains (m)
c	Semi-width of prefabricated vertical drain (m)
C	capacity value of a capacitor (F)
C_i	capacitor connected between the central node of cell i and the common ground node
c_v	coefficient of consolidation (m^2/s)
$c_{v,h}$	horizontal coefficient of consolidation (m^2/s)
$c_{v,x}$	horizontal coefficient of consolidation in x spatial direction (m^2/s)
$c_{v,y}$	horizontal coefficient of consolidation in y spatial direction (m^2/s)
$c_{v,z}$	vertical coefficient of consolidation (m^2/s)
d	depth of penetration of prefabricated vertical drain (m)
e	void ratio (dimensionless)
e_o	initial void ratio (dimensionless)
H	soil thickness or draining length of the water in vertical direction (m)
I_C	current that flows through a capacitor (A)
I_R	current that flows through a resistance (A)
J _C	current flow associated with a capacitor (A)
J _R	current flow associated with a resistance (A)
k_d	hydraulic conductivity of the PVD (m/s)
k_h	horizontal hydraulic conductivity of the undisturbed soil (m/s)
$k_{h,s}$	horizontal hydraulic conductivity of the smear zone (m/s)
k_v	vertical hydraulic conductivity of the undisturbed soil (m/s)
$k_{v,s}$	vertical hydraulic conductivity of the smear zone (m/s)
n	normal direction to the boundary surface
N_x	number of cells in x direction
N_y	number of cells in y direction
N_z	number of cells in z direction
q	uniform load applied to the ground surface (N/m^2)
q_w	discharge capacity of the PVD for unit gradient of pressure (m^3/s)
R	value of electrical resistance (Ω)
R_j	resistance connected between the central node of cell i and node j
t	time independent variable (s)
t_d	PVD thickness (m)
t_o	characteristic time of the consolidation process (s)
u	excess pore water pressure (N/m^2)
U	local degree of settlement (dimensionless)

\bar{U}	average degree of settlement (dimensionless)
u_i	excess pore pressure in node i (N/m^2)
u_o	initial excess pore pressure (N/m^2)
V_C	voltage between the terminals of a capacitor (V)
V_R	voltage between the terminals of a resistance (V)
x	long horizontal spatial coordinate (m)
X	value of the spatial coordinate x (m)
y	wide horizontal spatial coordinate (m)
Y	value of the spatial coordinate y (m)
z	vertical spatial coordinate (m)
Z	value of the spatial coordinate z (m)
γ_w	specific weight of water (N/m^3)
σ'_f	final effective pressure (N/m^2)
σ'_o	initial effective pressure (N/m^2)

References

1. Del Cerro Velázquez, F.; Gómez-Lopera, S.A.; Alhama, F. A powerful and versatile educational software to simulate transient heat transfer processes in simple fins. *Comput. Appl. Eng. Educ.* **2008**, *16*, 72–82. [[CrossRef](#)]
2. Alhama, I.; Soto-Meca, A.; Alhama, F. Fatsim-A: An educational tool based on electrical analogy and the code PSpice to simulate fluid flow and solute transport processes. *Comput. Appl. Eng. Educ.* **2014**, *22*, 516–528.
3. CODENS_13 [Software]. Coupled Ordinary Differential Equations by Network Simulation. © Universidad Politécnica de Cartagena, Sánchez, J.F., Alhama, I., Morales-Guerrero, J.L., Alhama, F. 2014.
4. Manteca, I.A.; Alcaraz, M.; Trigueros, E.; Alhama, F. Dimensionless characterization of salt intrusion benchmark scenarios in anisotropic media. *Appl. Math. Comput.* **2014**, *247*, 1173–1182. [[CrossRef](#)]
5. Conesa, M.; Pérez, J.S.; Alhama, I.; Alhama, F. On the nondimensionalization of coupled, nonlinear ordinary differential equations. *Nonlinear Dyn.* **2016**, *84*, 91–105. [[CrossRef](#)]
6. SICOMED_2018 [Software]. Simulación de Consolidación Con Mechas Drenantes. © Universidad Politécnica de Cartagena, García-Ros, G., Alhama, I. 2018. (In registration phase).
7. Karim, U.F. Simulation and video software development for soil consolidation testing. *Adv. Eng. Softw.* **2003**, *34*, 721–728. [[CrossRef](#)]
8. Ngspice [Software]. Open Source Mixed Mode, Mixed Level Circuit Simulator (Based on Berkeley's Spice3f5). Available online: <http://ngspice.sourceforge.net/> (accessed on 31 January 2014).
9. González-Fernández, C.F. Applications of the network simulation method to transport processes. In *Network Simulation Method*; Horro, J., Ed.; Research Signpost: Trivandrum, India, 2002.
10. Alhama, F. Estudio de Respuestas Térmicas Transitorias en Procesos No Lineales de Transmisión de Calor Mediante el Método de Simulación Por Redes. Ph.D. Thesis, Universidad de Murcia, Murcia, Spain, 1999.
11. Von Terzaghi, K. Die Berechnung der Durchlässigkeitsziffer des Tones aus dem Verlauf der hydrodynamischen Spannungs. Erscheinungen. *Sitzungsber. Akad. Wiss. Math. Naturwiss. Kl. Abt. 2A* **1923**, *132*, 105–124.
12. Taylor, D.W. *Fundamentals of Soil Mechanics*; Wiley: New York, NY, USA, 1948.
13. Berry, P.L.; Reid, D. *An Introduction to Soil Mechanics*; McGraw-Hill: London, UK, 1987.
14. Davis, E.H.; Raymond, G.P. A non-linear theory of consolidation. *Géotechnique* **1965**, *15*, 161–173. [[CrossRef](#)]
15. Manteca, I.A.; García-Ros, G.; López, F.A. Universal solution for the characteristic time and the degree of settlement in nonlinear soil consolidation scenarios. A deduction based on nondimensionalization. *Commun. Nonlinear Sci. Numer. Simul.* **2018**, *57*, 186–201. [[CrossRef](#)]
16. Hansbo, S.; Jamiolkowski, M.; Kok, L. Consolidation by vertical drains. *Géotechnique* **1981**, *31*, 45–66. [[CrossRef](#)]
17. Indraratna, B.; Redana, I.W. Numerical modeling of vertical drains with smear and well resistance installed in soft clay. *Can. Geotech. J.* **2000**, *37*, 132–145. [[CrossRef](#)]
18. Conte, E.; Troncone, A. Radial consolidation with vertical drains and general time-dependent loading. *Can. Geotech. J.* **2009**, *46*, 25–36. [[CrossRef](#)]
19. Castro, E.; García-Hernández, M.T.; Gallego, A. Transversal waves in beams via the network simulation method. *J. Sound Vib.* **2005**, *283*, 997–1013. [[CrossRef](#)]
20. Morales-Guerrero, J.L.; Moreno-Nicolás, J.A.; Alhama, F. Application of the network method to simulate elastostatic problems defined by potential functions. Applications to axisymmetrical hollow bodies. *Int. J. Comput. Math.* **2012**, *89*, 1781–1793. [[CrossRef](#)]

21. Sánchez, J.F.; Alhama, F.; Moreno, J.A. An efficient and reliable model based on network method to simulate CO₂ corrosion with protective iron carbonate films. *Comput. Chem. Eng.* **2012**, *39*, 57–64. [[CrossRef](#)]
22. Bég, O.A.; Takhar, H.S.; Zueco, J.; Sajid, A.; Bhargava, R. Transient Couette flow in a rotating non-Darcian porous medium parallel plate configuration network simulation method solutions. *Acta Mech.* **2008**, *200*, 129–144. [[CrossRef](#)]
23. Marín, F.; Alhama, F.; Moreno, J.A. Modelling of stick-slip behavior with different hypotheses on friction forces. *Int. J. Eng. Sci.* **2012**, *60*, 13–24. [[CrossRef](#)]
24. Cánovas, M.; Alhama, I.; Trigueros, E.; Alhama, F. Numerical simulation of Nusselt-Rayleigh correlation in Bénard cells. A solution based on the network simulation method. *Int. J. Numer. Methods Heat Fluid Flow* **2015**, *25*, 986–997. [[CrossRef](#)]
25. Li, Y.; Chen, Y.F.; Zhang, G.J.; Liu, Y.; Zhou, C.B. A numerical procedure for modeling the seepage field of water-sealed underground oil and gas storage caverns. *Tunn. Undergr. Space Technol.* **2017**, *66*, 56–63. [[CrossRef](#)]
26. Taormina, R.; Chau, K.W.; Sivakumar, B. Neural network river forecasting through baseflow separation and binary-coded swarm optimization. *J. Hydrol.* **2015**, *529*, 1788–1797. [[CrossRef](#)]
27. Chen, X.Y.; Chau, K.W. A Hybrid Double Feedforward Neural Network for Suspended Sediment Load Estimation. *Water Resour. Manag.* **2016**, *30*, 2179–2194. [[CrossRef](#)]
28. Olyae, E.; Banejad, H.; Chau, K.W.; Melesse, A.M. A comparison of various artificial intelligence approaches performance for estimating suspended sediment load of river systems: A case study in United States. *Environ. Monit. Assess.* **2015**, *187*. [[CrossRef](#)] [[PubMed](#)]
29. Chau, K.W. Use of Meta-Heuristic Techniques in Rainfall-Runoff Modelling. *Water* **2017**, *9*, 186. [[CrossRef](#)]
30. González, L.M.; Sánchez, J.F.; Barberá, M. Comparación de los softwares utilizados para el cálculo de inmisión en procesos de incineración. *Gac. Sanit.* **2017**, *31*, 73.
31. Sánchez, J.F.; González, L.M.; Barberá, M. Análisis de la altura de la chimenea en procesos de incineración mediante análisis dimensional. *Gac. Sanit.* **2017**, *31*, 330.
32. García-Ros, G.; Alhama, I. *SICOMED_3D: Simulación y Diseño de Problemas de Consolidación de Suelos Con Mechas Drenantes*; Universidad Politécnica, CRAI Biblioteca: Cartagena, Spain, 2017.
33. García-Ros, G. Caracterización Adimensional y Simulación Numérica de Procesos Lineales y No Lineales de Consolidación de Suelos. Ph.D. Thesis, Universidad Politécnica de Cartagena, Cartagena, Spain, 2016.
34. Barron, R.A. Consolidation of fine grained soils by drain wells. *Trans. ASCE* **1948**, *113*, 718–742.



© 2018 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).