

Article

Progress in Carnot and Chambadal Modeling of Thermomechanical Engine by Considering Entropy Production and Heat Transfer Entropy

Michel Feidt ¹ and Monica Costea ^{2,*}

¹ Laboratory of Energetics, Theoretical and Applied Mechanics (LEMTA), URA CNRS 7563, University of Lorraine, 54518 Vandoeuvre-lès-Nancy, France; michel.feidt@univ-lorraine.fr

² Department of Engineering Thermodynamics, University Politehnica of Bucharest, 060042 Bucharest, Romania

* Correspondence: monica.costea@upb.ro; liana5802@yahoo.fr; Tel.: +40-021-402-9339

Received: 11 November 2019; Accepted: 13 December 2019; Published: 16 December 2019

Abstract: Nowadays the importance of thermomechanical engines is recognized worldwide. Since the industrial revolution, physicists and engineers have sought to maximize the efficiency of these machines, but also the mechanical energy or the power output of the engine, as we have recently found. The optimization procedure applied in many works in the literature focuses on considering new objective functions including economic and environmental criteria (i.e., ECOP ecological coefficient of performance). The debate here is oriented more towards fundamental aspects. It is known that the maximum of the power output is not obtained under the same conditions as the maximum of efficiency. This is shown, among other things, by the so-called nice radical that accounts for efficiency at maximum power, most often for the endoreversible configuration. We propose here to enrich the model and the debate by emphasizing the fundamental role of the heat transfer entropy together with the production of entropy, accounting for the external or internal irreversibilities of the converter. This original modeling to our knowledge, leads to new and more general results that are reported here. The main consequences of the approach are emphasized, and new limits of the efficiency at maximum energy or power output are obtained.

Keywords: Carnot engine; optimization; heat transfer entropy; entropy production; new efficiency limits

1. Introduction

The origin of the industrial era in the 19th century is strongly connected to thermomechanical engines whose importance in our society is well-known. Their rapid development and evolution have contributed to the foundation of thermodynamics as a new branch of science, mainly concerned with fundamental aspects, as well as numerous applications.

The famous reference case is relative to the Carnot engine [1], but it refers only to an Equilibrium Thermodynamics modelling of a totally reversible engine. Additionally, the work done by Carnot generalizes the concept of efficiency according to the First Law of Thermodynamics starting from a purely mechanical approach [2], and the concept of the Carnot cycle. The interactions between the working fluid and the surroundings during a cycle consist of a mechanical energy exchange, W , and a calorific energy exchange, Q , which are of infinite time duration for reversible conditions. This leads to a quasi-static cycle, whose mean power output of the engine, \dot{W} , is zero.

Since (approximately) the 80s, a new approach has been developed including the existence of unavoidable heat transfer irreversibilities (endo-reversible machine [3]), and afterward, internal

irreversibilities of the converter were also considered, but less frequently. To take account of these irreversibilities, two main forms are reported in the literature:

- an entropic ratio, I [4];
- a production of entropy, that for a cycle is represented as a parameter, ΔS_I [5].

In the more general case, the entropic ratio could be a function that needs to be specified. This will be considered in this paper.

The main objective encountered in the literature relative to the Non-Equilibrium Thermodynamics approach remains the power output optimization of the engine and the associated conditions (vector of state), as well as the efficiency associated with maximum power.

Numerous studies are concerned with the influence of:

- the form of the heat transfer laws at source and sink [6–10];
- the nature of the sources and sinks (thermostats, fluid flows without phase change) [11,12];
- various objective functions [10,13–16];
- consideration of added constraints [17–25];
- thermal losses or adiabaticity [26–28];
- various irreversibilities (mainly global approaches by considering ΔS_I or I [4]; or introduced by mechanisms, namely solid or fluid energy dissipation) [5].

The present paper proposes a new modelling of an irreversible cycle focused on a necessary condition of the cycle existence, namely the heat transfer entropy. As the most important one for the cycle is the entering heat transfer entropy associated with the heat input in the converter (engine), it will be called hereafter, reference entropy, ΔS . According to the modeling assumptions that consider all cycle processes in the converter as irreversible, the total entropy production over a cycle, ΔS_I is added to this reference heat transfer entropy. The coupling consequence of these two entropies in the analytical analysis of an irreversible cycle leads to new results that are reported here.

This new modelling is developed for the exo-reversible and endo-irreversible Carnot engine configuration, as the first possible extension of the primitive Carnot cycle approach.

Then, the remodeled Chambadal [29] engine configuration is described by adding the influence of the converter internal irreversibility. The optimization approach considers two ways to introduce the converter internal irreversibility, namely the entropic ratio model and the entropic production one, each of them being developed for different dependence functions of the system parameters. The consequences of this addition on the optimized power output are reported, and the limit cases—the endo-reversible Carnot engine and endo-irreversible model—are shown to be recovered.

A discussion of the overall results and an attempt to generalize the present study provide new and important upperbounds for the engine performance.

An ongoing next step will be the application of the same methodology to Curzon-Ahlborn [30] modelling of the Carnot engine by including internal irreversibilities of the converter and considering the importance of the heat transfer entropy.

2. The Endo-irreversible Carnot Engine

2.1. Cycle Representation in T-S Diagram

The thermomechanical engine is considered as a system composed of a hot bath (heat source), converter (engine) and cold bath (heat sink), as shown in Figure 1. The coupling of the three subsystems is made by the heat transferred from the source to the working fluid in the engine at its hot side, and the heat rejected by the working fluid to the sink at the cold side, respectively.

In the Carnot engine modeling, the source and sink are two infinite bath (thermostats) at temperatures T_{HS} and T_{CS} respectively. The Carnot engine operates upon an irreversible cycle with perfect thermal contact (no temperature difference) with the two bathes. Thus, one can call it an exo-reversible and endo-irreversible engine.

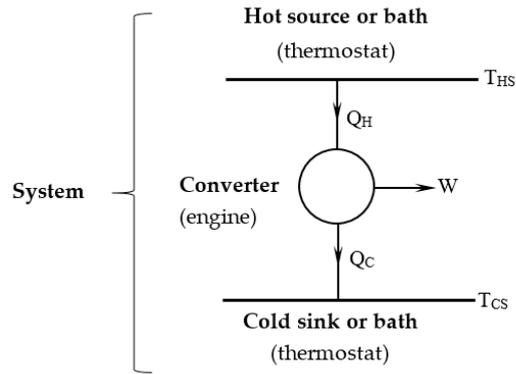


Figure 1. Schematic representation of the thermo-mechanical engine.

The irreversible cycle is identified in Figure 2 from state 1 (beginning of the high temperature isotherm), 2 (exit of the high temperature isotherm and beginning of the adiabatic expansion), 3 (end of the adiabatic expansion and beginning of the low temperature isotherm), and 4 (exit of the low temperature isotherm and beginning of the adiabatic compression, up to state 1). The reversible cycle (marked in red) is also represented in Figure 2 as a starting graphical cycle helping to emphasize the effect of each internal irreversibility considered in the modeling.

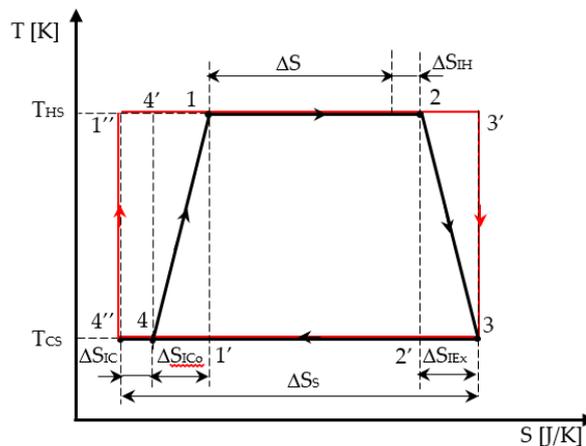


Figure 2. Representation of the Carnot engine cycle with internal irreversibility and the corresponding reversible one (in red) in T-S diagram.

Both adiabatic and isothermal transformations of the cycle are considered irreversible. Thus, the irreversibility on the isothermal processes is represented on the horizontal lines 12 and 34 by the corresponding production of entropy. As the irreversibility on the adiabatic processes in the cycle is also emphasized by entropy production, the graphical representation is associated to a polytropic processes represented in the T-S diagram by a corresponding dependence $T = f(S)$. For simplicity, a linear dependence $T = f(S)$ between states 2 and 3, and 4 and 1, respectively, replaced the real one in the analytical and graphical analysis of the cycle.

Consequently, the production of entropy on a cycle ΔS_I representing the total amount of entropy produced in the universe per cycle (= engine + environment) is expressed as:

$$\Delta S_I = \Delta S_{IH} + \Delta S_{IEx} + \Delta S_{ICo} + \Delta S_{IC} \tag{1}$$

with ΔS_{IH} , production of entropy on the hot isotherm;

ΔS_{IEx} , production of entropy during the adiabatic expansion;

ΔS_{ICo} , production of entropy during the adiabatic compression; and

ΔS_{IC} , production of entropy on the cold isotherm, as shown in Figure 2.

Furthermore, for the hot temperature isotherm, the entropy production ΔS_{IH} corresponds to:

$$\Delta S_H = \Delta S + \Delta S_{IH}, \quad (2)$$

where the reference heat transfer entropy is expressed as:

$$\Delta S = \frac{Q_H}{T_{HS}}, \quad (3)$$

and it equals the entropy change in the hot bath (in module).

Similarly, for the cold temperature isotherm, the entropy production ΔS_{IC} corresponds to:

$$\Delta S_C = \Delta S_S - \Delta S_{IC}, \quad (4)$$

as all production of entropy terms are positive (see Figure 2).

The two entropy productions ΔS_{IH} and ΔS_{IC} correspond to the graphical representation in Figure 3.

One outlines here that the entropy balance over the irreversible cycle is expressed as:

$$\Delta S + \Delta S_I = \Delta S_S = \frac{Q_C}{T_{CS}}, \quad (5)$$

where ΔS_S represents the heat transfer entropy corresponding to the heat transferred to the sink.

Note that the commutations between isothermal and adiabatic processes are assumed to be instantaneous. Moreover, one observes that while the two real isothermal processes are well identified on the diagram, it is not the same for the irreversible adiabatic processes linking state 2 to 3, and then 4 to 1. All the curves inscribed in the rectangle (2-3'-3-2'-2) satisfying the criterion of increasing entropy on the adiabatic expansion process are possible.

Plotting a linear transformation in the T - S diagram between state 2 and 3 is not the only physical acceptable solution, because in the frame of Non-Equilibrium Thermodynamics, one only has access to points 2 and 3 representing the adiabatic case.

The same discourse can be renewed for the adiabatic compression between 4 and 1. In short, all the curves inscribed in the rectangle (4-4'-1-1'-4) satisfying the criterion of increasing entropy on the adiabatic process are possible. The linear transformation in the T - S diagram between state 4 and 1 is again a possible intermediate solution.

This irreversibility approach is similar to the one of a recent publication [31].

The graphical analysis of the cycle with linearized processes between 23 and 41 illustrated in Figure 2 shows the area representing the corresponding linearized work per cycle W_L as:

$$W_L = \left(\frac{\Delta S_H + \Delta S_C}{2} \right) (T_{HS} - T_{CS}). \quad (6)$$

This 'geometric' work (6) is different from the 'thermodynamic' (or mechanical) work that will be expressed in Section 2.2 by (10) since (6) depends on the linear assumption regarding the representation of the irreversible adiabatic processes between 23 and 41 as done in many references [31]. Nevertheless, it does not reflect the exact physical behavior of the endo-irreversible Carnot heat engine that could be different to the linear one. Thus, only (10), which is based on energy and entropy balances, will provide the correct expression of the mechanical work.

2.2. Analytical Model

Considering the adiabaticity (no thermal loss) and exo-reversibility assumptions for the cycle in this model, the heat transfer at the source and sink are respectively:

$$Q_{HS} = Q_H > 0 \quad ; \quad Q_{CS} = Q_C < 0. \quad (7)$$

The exo-reversibility of the heat transfer relative to the two thermostats imposes:

$$T_{HS} = T_H \quad ; \quad T_{CS} = T_C. \quad (8)$$

Thus, the entropy balance on the system can be written as:

$$\frac{Q_{HS}}{T_{HS}} + \Delta S_I = \frac{|Q_{CS}|}{T_{CS}}, \quad (9)$$

where from the expression of the mechanical work per cycle from the First Law when the entropy variation corresponding to the heat transfer converted at the source is considered as reference heat transfer entropy, ΔS , becomes:

$$W = Q_{HS} - |Q_{CS}| = (T_{HS} - T_{CS})\Delta S - T_{CS}\Delta S_I. \quad (10)$$

The first term of the second equality represents the reversible work, and the second one, the mechanical dissipation (by fluid and solid friction mainly).

The expression of W in (10) marks the presence of the internal entropy production over a cycle ΔS_I that is supposed as a parameter. Its relationship with the ratio method is introduced below, by emphasizing ΔS in (10):

$$W = \Delta S \left[(T_{HS} - T_{CS}) - T_{CS} \frac{\Delta S_I}{\Delta S} \right]. \quad (11)$$

Thus, the ratio $\Delta S_I/\Delta S$ appears in (11) and it corresponds to the irreversibility degree d_I introduced by Novikov [32]. This parameter is also related to an entropic ratio according to Ibrahim's approach [4], which represents the absolute value of the ratio of the entropy change in the cold bath to the entropy change in the hot bath and is given as:

$$I = \frac{\Delta S_S}{\Delta S}. \quad (12)$$

One notes that this ratio can be particularized (i.e., $I_H = \Delta S_S/\Delta S_H$), since it represents a coefficient relative to an entropy variation corresponding to the heat exchanges at the hot and cold sides of the converter. Hence, other assignments could be given (I_C , I_{HS} , I_{CS}). For the adiabatic exo-reversible Carnot engine, this ratio is $I = I_H = I_{HS}$ and moreover, it is easy to show that:

$$I = 1 + d_I = 1 + \frac{\Delta S_I}{\Delta S}, \quad (13)$$

and

$$W = \Delta S [(T_{HS} - T_{CS}) - T_{CS}(I - 1)] = \Delta S [T_{HS} - I \cdot T_{CS}], \quad (14)$$

$$\eta_I = \frac{W}{Q_{HS}} = 1 - I \frac{T_{CS}}{T_{HS}}. \quad (15)$$

It results that the internal irreversibility diminishes the mechanical work and cycle efficiency.

It remains to analyze how I or ΔS_I vary with the cycle quantities. It can be reasonably assumed that ΔS_I and (or) I depend on ΔS and (or) $\Delta T_S = T_{HS} - T_{CS}$, as the two temperatures are generally parameters of the problem for the Carnot endo-irreversible engine. Hence, two functions can be proposed, whose general forms (currently unknown in practice) are written as:

$$\Delta S_I = f_{SI}(\Delta T_S, \Delta S) \quad ; \quad I = f_I(\Delta T_S, \Delta S). \quad (16)$$

If there is an optimum of W , it must satisfy the necessary condition imposed by one of the following equation sets:

$$\frac{\partial W}{\partial \Delta T_S} = \Delta S - T_{CS} \frac{\partial f_{SI}}{\partial \Delta T_S} = 0 \quad ; \quad \frac{\partial W}{\partial \Delta T_S} = \Delta S \left(1 - \frac{\partial f_I}{\partial \Delta T_S} \right) = 0, \quad (17)$$

$$\frac{\partial W}{\partial \Delta S} = \Delta T_S - T_{CS} \frac{\partial f_{SI}}{\partial \Delta S} = 0 \quad ; \quad \frac{\partial W}{\partial \Delta S} = \Delta T_S - T_{CS} \frac{\partial f_I}{\partial \Delta S} = 0. \quad (18)$$

3. The Chambadal Engine

The representation of the Chambadal engine irreversible cycle in Figure 3 shows that in addition to the internal irreversibility of the cycle that was graphically detailed in Section 2.1, the external irreversibility corresponding to the heat transfer at temperature difference at the hot side appears. Since the same components of the internal irreversibility for the endo-irreversible Carnot engine are considered here as well, the cycle representation was simplified by only preserving its shape, and the

new irreversibility completing the model was emphasized. Hence, in Figure 3 case (a) corresponds to a heat transfer from a source of constant temperature T_{HS} , while case (b) shows a finite heat capacity source with the inlet temperature T_{HSi} . The temperature difference of the source and sink level, ΔT_s , compared to the cycled fluid one, ΔT_{CF} , that remains the same, is also relevant for the heat input in the two cases.

Note that the external irreversibility at the sink is neglected in this approach by considering the heat rejection to sink occurring at ambient temperature ($T_c = T_{Cs} = T_0$).

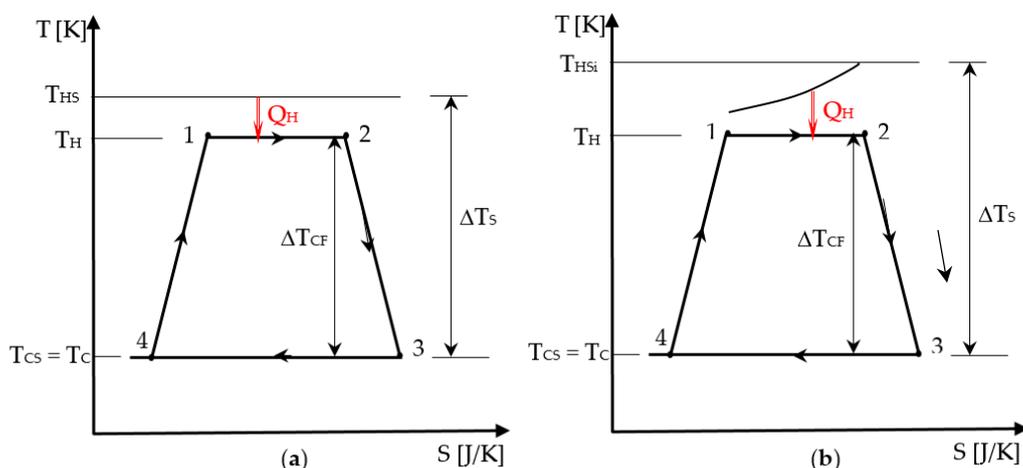


Figure 3. Representation of the associated cycle to the Chambadal engine in T-S diagram: (a) source of constant temperature; (b) source of finite heat capacity.

The Chambadal engine model is concerned with steady-state operation of the engine and consequently, heat rates and power output are used. We propose here to convert this modeling with reference to a cycle and the related energies-heat and work, thus leading to a different model, the quasi-Chambadal engine.

It involves a thermostat or source of finite heat capacity rate $\dot{C}_H = \dot{m}_H c_{pH}$, with an input temperature T_{HSi} .

Hence, when the source is a thermostat of constant temperature, T_{HS} , the heat transfer at the hot end is expressed as:

$$\dot{Q}_H = U_H A_H (T_{HS} - T_H), \tag{19}$$

with $K_H = U_H A_H$, heat transfer conductance of the source corresponding to the steady state operation regime.

When the source has a finite heat capacity, it involves a temperature variation of the primary fluid in the corresponding heat exchanger. As the input temperature of the primary fluid T_{HSi} is generally known, by using the effectiveness ε – number of heat transfer units NTU method [27], one gets:

$$\dot{Q}_H = \varepsilon_H \dot{C}_H (T_{HSi} - T_H). \tag{20}$$

Note that the two expressions of \dot{Q}_H averaged on a time duration Δt , allow to recover the caloric energy Q_H , or the mass specific energy (often used) that results by dividing \dot{Q}_H with the mass flow rate of the cycled fluid. Thus, a general expression of the heat transferred at the source is:

$$Q_H = G_H (T_{HSi} - T_H) = T_H \cdot \Delta S, \tag{21}$$

where G_H generally represents a finite physical dimension of the source (thus also of the system) with reference to energy here, its unit being J/K.

3.1. Optimization Approach for the Entropic Ratio Model

The previous equation is completed in this approach by the entropy balance expressed over a cycle as:

$$I_H \frac{Q_H}{T_H} = \frac{Q_C}{T_0}. \quad (22)$$

This leads to the expression of the mechanical work output as:

$$W = G_H(T_{HSi} - T_H) \left(1 - I_H \frac{T_0}{T_H}\right). \quad (23)$$

By taking into account that I_H is a potential function of T_H , the mechanical work maximum value $MaxW$ search should satisfy the necessary condition:

$$\frac{\partial W}{\partial T_H} = 0 = -1 + I_H \frac{T_0}{T_H} - (T_{HSi} - T_H) \frac{I_{H,H} T_0 T_H - I_H T_0}{T_H^2}, \quad (24)$$

where $I_{H,H} = \frac{\partial I_H}{\partial T_H}$.

The term rearrangement leads to an equation of second degree or more to be solved:

$$(T_{HSi} - T_H) T_0 T_H I_{H,H} = I_H T_0 T_{HSi} - T_H^2. \quad (25)$$

Possible cases are:

- i) I_H is a constant parameter.

This implies $\partial I_H / \partial T_H = I_{H,H} = 0$.

Thereby, the optimum temperature at the hot-end, $MaxW$ and the corresponding cycle efficiency respectively, result as:

$$T_H^* = \sqrt{I_H T_0 T_{HSi}} \quad (26)$$

$$MaxW = G_H (\sqrt{T_{HSi}} - \sqrt{I_H T_0})^2, \quad (27)$$

$$\eta_I(MaxW) = 1 - \sqrt{\frac{I_H T_0}{T_{HSi}}} \quad (28)$$

It is obvious that the rise of I_H parameter results in an increase of the optimal temperature T_H^* and has the opposite effect (decrease) on $MaxW$ and the associated cycle efficiency.

- ii) I_H is a linear function of $\Delta T_T = T_H - T_0$ (see Figure 3), with values ≥ 1 .

One considers the following expression for I_H :

$$I_H = C_I (T_H - T_0) + 1, \quad \text{with } C_I = I_{H,H} \quad (29)$$

By combining (25) with (29), one gets:

$$C_I (T_{HSi} - T_H) T_0 T_H = [C_I (T_H - T_0) + 1] T_0 T_{HSi} - T_H^2. \quad (30)$$

The above equation leads to the expression of the optimum temperature of the cycled fluid at the hot side expressed by:

$$T_H^* = \sqrt{T_0 T_{HSi}}. \quad (31)$$

It results that irreversibility does not affect the temperature T_H^* , but it does affect the mechanical work and the cycle efficiency, whose expressions become:

$$MaxW = G_H (1 - C_I T_0) (\sqrt{T_{HSi}} - \sqrt{T_0})^2, \quad (32)$$

$$\eta_I(MaxW) = (1 - C_I T_0) \left(1 - \sqrt{\frac{T_0}{T_{HSi}}}\right). \quad (33)$$

The comparison of (27) and (32) clearly shows the maximum work decrease in case ii) and by a completely different expression. The same happens for the efficiency at maximum work, when comparing (28) and (33).

3.2. Optimization Approach for the Entropic Production Model

The entropy balance takes a similar form to that of Section 2.2, namely:

$$\frac{Q_H}{T_H} + \Delta S_I = \frac{Q_C}{T_C}, \tag{34}$$

with $T_C = T_{CS} = T_0$.

One notes that the production of entropy on the cycle in (34) is not the same with (1) in the endo-irreversible Carnot engine case, since it also considers the production of entropy corresponding to the heat transfer at finite temperature difference (see Figure 3).

The mechanical work is expressed as:

$$W = Q_H \left(1 - \frac{T_{CS}}{T_H}\right) - T_{CS} \Delta S_I. \tag{35}$$

By using (21) in (35), one gets:

$$W = G_H (T_{HSi} - T_H) \left(1 - \frac{T_{CS}}{T_H}\right) - T_{CS} \Delta S_I. \tag{36}$$

The term ΔS_I is a potential function of T_H (also increasing one). Therefore, the *MaxW* search should satisfy the necessary condition:

$$\frac{\partial W}{\partial T_H} = 0 = -\left(1 - \frac{T_{CS}}{T_H}\right) + (T_{HSi} - T_H) \frac{T_{CS}}{T_H^2} - \frac{T_{CS} \Delta S_{I,H}}{G_H} = 0. \tag{37}$$

This form is simpler than the previous one, providing an equation of the second degree or more to solve.

The possible cases are as follows:

- i) ΔS_I is a constant parameter.

This implies $\partial \Delta S_I / \partial T_H = \Delta S_{I,H} = 0$, which delivers:

$$T_H^* = \sqrt{T_{HSi} T_{CS}}. \tag{38}$$

The expressions of *MaxW* and $\eta_I(\text{MaxW})$ are straightforward:

$$\text{MaxW} = G_H (\sqrt{T_{HSi}} - \sqrt{T_{CS}})^2 - T_{CS} \Delta S_I, \tag{39}$$

$$\eta_I(\text{MaxW}) = 1 - \sqrt{\frac{T_{CS}}{T_{HSi}}} \left(1 + \frac{\Delta S_I}{\Delta S}\right). \tag{40}$$

- ii) A linear dependence of ΔS_I on the temperature difference $\Delta T_T = T_H - T_{CS}$ is considered.

We assume that:

$$\Delta S_I = 0 \quad \text{if } \Delta T_T = 0;$$

$$\Delta S_I = \Delta S_{IS} \text{ (new parameter) if } \Delta T_T = \Delta T_S = T_{HSi} - T_{CS} \text{ (see Figure 3b),}$$

where from:

$$\Delta S_I = \Delta S_{IS} \frac{\Delta T_T}{\Delta T_S} = \Delta S_{IS} \frac{T_H - T_{CS}}{T_{HSi} - T_{CS}} = C_{IS} (T_H - T_{CS}). \tag{41}$$

The mechanical work optimization imposes:

$$\frac{\partial W}{\partial T_H} = 0 = G_H \left(\frac{T_{HSi} T_{CS}}{T_H^2} - 1\right) - \frac{\Delta S_{IS}}{\Delta T_S} T_{CS}, \tag{42}$$

which leads to:

$$T_H^* = \sqrt{\frac{T_{HSi} T_{CS}}{1 + \frac{T_{CS} \Delta S_{IS}}{\Delta T_S G_H}}}. \tag{43}$$

It is well known that internal irreversibility always decreases *W*. Hence, (41) is valuable by emphasizing in the denominator two factors that modify the optimal temperature T_H^* :

- the first, an intensive one: $\frac{T_{CS}}{T_{HSi}-T_{CS}}$;
- the second, an extensive one: $\frac{\Delta S_{IS}}{G_H}$.

The last factor is not only related to the converter through ΔS_{IS} , but also to the hot source by the finite physical dimension G_H (coupling).

This shows the interest of an entropic description of the system. Thus, the corresponding maximum power output is given by:

$$MaxW = G_H(\sqrt{T_{HSi}} - \sqrt{I \cdot T_0})^2, \tag{44}$$

with

$$I = \frac{T_0}{\Delta T_S} \cdot \frac{\Delta S_{IS}}{G_H}. \tag{45}$$

The associated first law efficiency is:

$$\eta_I(MaxW) = \frac{\left(1 - \sqrt{\frac{I \cdot T_0}{T_{HSi}}}\right)^2}{1 - \sqrt{\frac{T_0}{I \cdot T_{HSi}}}}, \tag{46}$$

3.3. Quasi-Chambadal Model with Added Heat Transfer Entropy Constraint and Production of Entropy

This optimization is based on (21) from which the temperature T_H is expressed as:

$$T_H = \frac{G_H}{G_H + \Delta S} T_{HS}, \tag{47}$$

with ΔS , reference heat transfer entropy associated to the heat input. This result is an important one, since it illustrates the coupling between the source (G_H) and the converter (ΔS).

The expression of the mechanical work W can be easily derived as a function of the newly chosen variable ΔS :

$$W = \left[\frac{T_{HSi} G_H}{G_H + \Delta S} - T_0 \right] \Delta S - T_0 \Delta S_I. \tag{48}$$

This optimum with respect to ΔS corresponds to a converter adapted to the hot source. It results that W becomes maximum when ΔS_I is related to ΔS (to be specified) by the following function:

$$\frac{\partial W}{\partial \Delta S} = 0 = \left(\frac{G_H}{G_H + \Delta S} \right)^2 T_{HSi} - T_0 - T_0 \frac{\partial \Delta S_I}{\partial \Delta S}. \tag{49}$$

Following different assumptions, one can consider:

- i) the presence of the Novikov's irreversibility degree [9], that is expressed by:

$$\frac{\partial \Delta S_I}{\partial \Delta S} = d_I. \tag{50}$$

In this case, one gets at the optimum:

$$\Delta S^* = G_H \left[\frac{\sqrt{T_{HSi}}}{\sqrt{T_0} (1 + d_I)} - 1 \right]. \tag{51}$$

It results that the optimum heat transfer entropy ΔS^* diminishes with increasing irreversibility d_I , and the same goes for $MaxW$ and the cycle efficiency:

$$MaxW = G_H \left(\sqrt{T_{HSi}} - \sqrt{T_0} (1 + d_I) \right)^2, \tag{52}$$

$$\eta_I(MaxW) = 1 - \sqrt{\frac{T_0(1+d_I)}{T_{HSi}}}, \tag{53}$$

where $d_I \leq (T_{HSi} - T_0)/T_0$.

ii) when ΔS_I is a constant parameter, one finds similarly:

$$\Delta S^* = G_H \left[\frac{\sqrt{T_{HSi}}}{\sqrt{T_0}} - 1 \right], \tag{54}$$

and

$$MaxW = G_H(\sqrt{T_{HSi}} - \sqrt{T_0})^2 - T_0 \Delta S_I, \tag{55}$$

$$\eta_I(MaxW) = 1 - \sqrt{\frac{T_0}{T_{HSi}} \left(1 + \frac{\sqrt{T_0}}{\sqrt{T_{HSi}} - \sqrt{T_0}} \frac{\Delta S_I}{G_H} \right)}. \tag{56}$$

iii) ΔS_I may also depend of T_H in a linear form, as in Section 3.2, case ii), namely:

$$\Delta S_I = d_{IS} \frac{T_H - T_0}{T_{HSi} - T_0} \Delta S, \tag{57}$$

from which one gets:

$$W = (T_H - T_0) \Delta S \left(1 - T_0 \frac{d_{IS}}{T_{HSi} - T_0} \right), \tag{58}$$

where $d_{IS} \leq (T_{HSi} - T_0)/T_0$ is the parameter of entropic proportionality corresponding to the irreversibility degree of Novikov [24], but relative to the system composed of a source and converter (the heat transfer from the converter to the sink being neglected in the model).

Knowing the expression of T_H as a function of ΔS , one gets:

$$W = \left(T_{HSi} \frac{G_H}{G_H + \Delta S} - T_0 \right) \Delta S \left(1 - T_0 \frac{d_{IS}}{T_{HSi} - T_0} \right). \tag{59}$$

The optimum of the mechanical work with respect to ΔS is obtained after some calculations as:

$$MaxW = G_H(\sqrt{T_{HSi}} - \sqrt{T_0})^2 \left(1 - \frac{T_0}{T_{HSi} - T_0} d_{IS} \right). \tag{60}$$

The corresponding first law efficiency is:

$$\eta_I(MaxW) = \left(1 - \sqrt{\frac{T_0}{T_{HSi}}} \right) \left(1 - \frac{T_0 d_{IS}}{T_{HSi} - T_0} \right), \tag{61}$$

These two quantities are decreasing with the parameter d_{IS} . Thus, the mechanical work W is diminished by the term $\left(1 - T_0 \frac{d_{IS}}{T_{HSi} - T_0} \right)$, as shown in (59). Also, (61) clearly proves that irreversibility decreases the efficiency corresponding to maximum work.

4. Conclusions

This work presents a short history of the Carnot cycle approaches developed in the frame of Equilibrium Thermodynamics, of the actual endo-irreversible Carnot engine in Irreversible Thermodynamics, and for the Chambadal model.

The analytical model developed in the frame of Equilibrium Thermodynamics integrates the irreversibility in the natural form of an entropy production, or in an entropic ratio form (with various justified and correlated definitions) and is mainly related to the irreversibility degree introduced by Novikov [32].

The mechanical work of the irreversible cycle remains linked to the form of the irreversible isotherms and adiabatics, as has been shown in Section 2.1. The irreversibilities distribution between isothermal and adiabatic processes leads to framing the actual work between zero and $\max MaxW$, with the corresponding efficiencies pertaining to the interval between zero and the Carnot efficiency.

For the Chambadal model, the cycle approach or the one in the stationary dynamic regime come down to the same form, by introducing a characteristic property G_H , which is representative of the finite physical dimensions connected to the reference heat transfer entropy ΔS , characterizing the converter.

It results in the existence of an optimum of the mechanical work either in terms of intensive variable T_H , or in terms of extensive variable ΔS .

The two approaches leading to coherent results, but with different interpretations, provide a new perspective on the optimization of the Carnot engine, mainly by coupling of the hot source with the converter (G_H and ΔS).

Extensions are in progress, which are based on more complete models, particularly on the Curzon-Ahlborn one, that considers the non-equilibrium at source and sink. Also, the stochastic thermodynamics approach [33,34] is intended to be used in future works to evaluate different sources of irreversibility in the corresponding heat engines exactly, without additional assumptions. It could offer an alternative to evaluate the analytical results provided by our phenomenological approach.

Author Contributions: M.F. contributed to the development of the model, M.C. contributed to the preparation of the manuscript, design of the study and final proof, and to the analysis and interpretation of the results. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Conflicts of Interest: The authors declare no conflict of interest.

Symbols

A	heat transfer area, [m ²]
c_p	specific heat at constant pressure, [J/(kg K)]
\dot{C}	heat capacity rate, [W/K]
d	Novikov's irreversibility degree, [-]
$ECOP$	ecological coefficient of performance, [-]
G	finite physical dimension, [J/K]
K	heat transfer conductance, [W/K]
I	entropic ratio, [-]
NTU	number of heat transfer units, [-]
Q	heat, [J]
\dot{Q}	heat transfer rate, [W]
S	entropy, [J/K]
T	temperature, [K]
U	overall heat transfer coefficient, [W/(m ² K)]
W	mechanical work, [J]

Greek Symbols

ε	effectiveness, [-]
η	efficiency, [-]

Subscripts

C	relative to the cycled fluid at the cold source
Co	relative to compression
CS	cold source or sink
Ex	relative to expansion
H	relative to the cycled fluid at the hot source
HS	hot source

<i>HSi</i>	hot source
<i>I</i>	irreversibility of the converter
<i>IS</i>	irreversibility of the system (source-converter-sink)
<i>S</i>	source or sink, relative to temperature difference of source and sink
<i>T</i>	total, relative to extreme temperature difference of the cycled fluid
<i>0</i>	ambient

References

1. Carnot, S. *Réflexion sur la Puissance Motrice du feu*; Bachelier: Paris, France, 1824. (In French)
2. Carnot, S. *Principes Fondamentaux de L'équilibre et du Mouvement*; Wentworth Press: Paris, France, 2018. (In French)
3. Andresen, B.; Berry, R.S.; Ondrechen, M.I. Thermodynamics for processes in finite time. *Acc. Chem. Res.* **1984**, *17*, 266–271.
4. Ibrahim, O.M.; Klein, S.A.; Mitchell, J.W. Optimum heat power cycles for specified boundary conditions. *J. Eng. Gas Turb. Power* **1991**, *113*, 514–521.
5. Feidt, M. *Thermodynamique Optimale en Dimensions Physiques Finies*; Hermes: Paris, France, 2013. (In French)
6. Sánchez Salas, N.; Velasco, S.; Calvo Hernández, A. Unified working regime of irreversible Carnot-like heat engines with nonlinear heat transfer laws. *Energy Convers. Manag.* **2002**, *43*, 2341–2348.
7. Chen, L.; Xia, S.; Sun, F. Maximum power output of multistage irreversible heat engines under a generalized heat transfer law by using dynamic programming. *Sci. Iran.* **2013**, *20*, 301–312.
8. Feidt, M.; Costea, M.; Petrescu, S.; Stanciu, C. Nonlinear Thermodynamic analysis and optimization of a Carnot engine cycle. *Entropy* **2016**, *18*, 243–260, doi:10.3390/e18070742.
9. Zhan, Y.-B.; Ma, P.-C.; Zhu, X.-Q. Ecological optimization for a generalized irreversible Carnot engine with an universal heat transfer law. *Procedia Environ. Sci.* **2011**, *11 Pt B*, 945–952.
10. Stanciu, C.; Feidt, M.; Costea, M.; Stanciu, D. Optimization and entropy production: Application to Carnot-like refrigeration machines. *Entropy* **2018**, *20*, 953–975.
11. Park, H.; Kim, M.S. Performance analysis of sequential Carnot cycles with finite heat sources and heat sinks and its application in organic Rankine cycles. *Energy* **2016**, *99*, 1–9.
12. Feidt, M.; Costea, M.; Petre, C.; Petrescu, S. Optimization of direct Carnot cycle. *Appl. Therm. Eng.* **2007**, *27*, 829–839.
13. Feidt, M. Optimal Thermodynamics—New upperbounds. *Entropy* **2009**, *11*, 529–547, doi:10.3390/e11040529.
14. Kodal, A.; Sahin, B.; Yilmaz, T. A comparative performance analysis of irreversible Carnot heat engines under maximum power density and maximum power conditions. *Energy Convers. Manag.* **2000**, *41*, 235–248.
15. Feidt, M. *Thermodynamique et Optimisation Énergétique des Systèmes et Procédés*, 1st ed.; Lavoisier TEC et DOC: Paris, France, 1987. (In French)
16. Vaudrey, A.; Lanzetta, F.; Feidt, M.H.B. Reitlinger and the origin of efficiency at maximum power formula for heat engines. *J. Non-Equil. Thermodyn.* **2014**, *39*, 199–203.
17. Dong, Y.; El-Bakkali, A.; Feidt, M.; Descombes, G.; Périlhon, C. Association of finite-dimension thermodynamics and bond-graph approach for modeling on irreversible heat engine. *Entropy* **2012**, *14*, 642–653.
18. Sieniutycz, S.; Jeżowski, J. *Energy Optimization in Process Systems and Fuel Cells*, 3rd ed.; Elsevier: London, UK, 2018.
19. Long, R.; Liu, W. Ecological optimization for general heat engine. *Phys. A Stat. Mech. Appl.* **2015**, *434*, 232–239.
20. Yu, J.; Zhou, Y.; Liu, Y. Performance optimization of an irreversible Carnot refrigerator with finite mass flow rate. *Int. J. Refrig.* **2011**, *34*, 567–572.
21. Feidt, M.; Le Saos, K.; Costea, M.; Petrescu, S. Optimal allocation of HEX inventory associated with fixed power output or fixed heat transfer rate input. *Int. J. Thermodyn.* **2002**, *5*, 25–36.
22. Feidt, M.; Costea, M. From Finite Time to Finite Dimensions Thermodynamics: The Carnot engine and Onsager's relations revisited. *J. Non-Equil. Thermodyn.* **2018**, *43*, 151–161, doi:10.1515/jnet-2017-0047.

23. Blaise, M.; Feidt, M.; Maillet, D. Influence of the working fluid properties on optimized power of an irreversible finite dimensions Carnot engine. *Energy Convers. Manag.* **2018**, *163*, 444–456, doi:10.1016/j.encorman.2018.02.056.
24. Feidt, M. Thermodynamics applied to reverse cycle machines, a review. *Int. J. Refrig.* **2010**, *33*, 1327–1342.
25. Feidt, M. Thermodynamics of energy systems and processes: A review and perspectives. *J. Appl. Fluid Mech.* **2012**, *5*, 85–98.
26. Han, Y.; Wang, D.; Zhang, C.; Zhu, Y. The entransy degeneration and entransy loss equations for the generalized irreversible Carnot engine system. *Int. J. Heat Mass Transf.* **2017**, *106*, 895–907.
27. Feidt, M. *Finite Physical Dimensions Optimal Thermodynamics 1—Fundamentals*; ISTE Press—Elsevier: London, UK, 2017; pp. 75–97.
28. Bhattacharyya, S.; Blank, D.A. Power optimized work limit for internally irreversible reciprocating engines. *Int. J. Mech. Sci.* **2000**, *42*, 1357–1368.
29. Chambadal, P. *Les Centrales Nucléaires*; Armand Colin Paris, France, 1957. (In French)
30. Curzon, F.L.; Ahlborn, B. Efficiency of a Carnot engine at maximum power output. *Am. J. Phys.* **1975**, *43*, 22–24, doi:10.1119/1.10023.
31. Wang, J.; He, J. Efficiency at maximum power output of an irreversible Carnot-like cycle with internally dissipative friction. *Phys. Rev.* **2012**, *E86*, 051112.
32. Novikov, I.I. The efficiency of atomic power stations. *At. Energy* **1957**, *3*, 409–412.
33. Esposito, M.; Kawai, R.; Lindenberg, K.; Van den Broeck, C. Efficiency at maximum power of low dissipation Carnot engines. *Phys. Rev. Lett.* **2010**, *105*, 150603.
34. Holubec, V.; Ryabov, A. Cycling tames power fluctuations near optimum efficiency. *Phys. Rev. Lett.* **2018**, *121*, 120601.



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).