

Dynamic shear deformation of a precipitation hardened Al_{0.7}CoCrFeNi eutectic high-entropy alloy using hat-shaped specimen geometry

Bharat Gwalani¹, Tianhao Wang¹, Abhinav Jagetia¹, Sindhura Gangireddy¹, Saideep Muskeri¹, Sundeep Mukherjee¹, J. T. Lloyd³, Rajarshi Banerjee^{1,2}, Rajiv S. Mishra^{1,2}


¹Department of Materials Science and Engineering, University of North Texas, Denton, TX 76207 USA

²Advanced Materials and Manufacturing Processes Institute, University of North Texas, Denton, TX 76207 USA

³U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, 21005, US


Corresponding Authors: bharatgwalani@my.unt.edu; rajiv.mishra@unt.edu

Supplementary Information

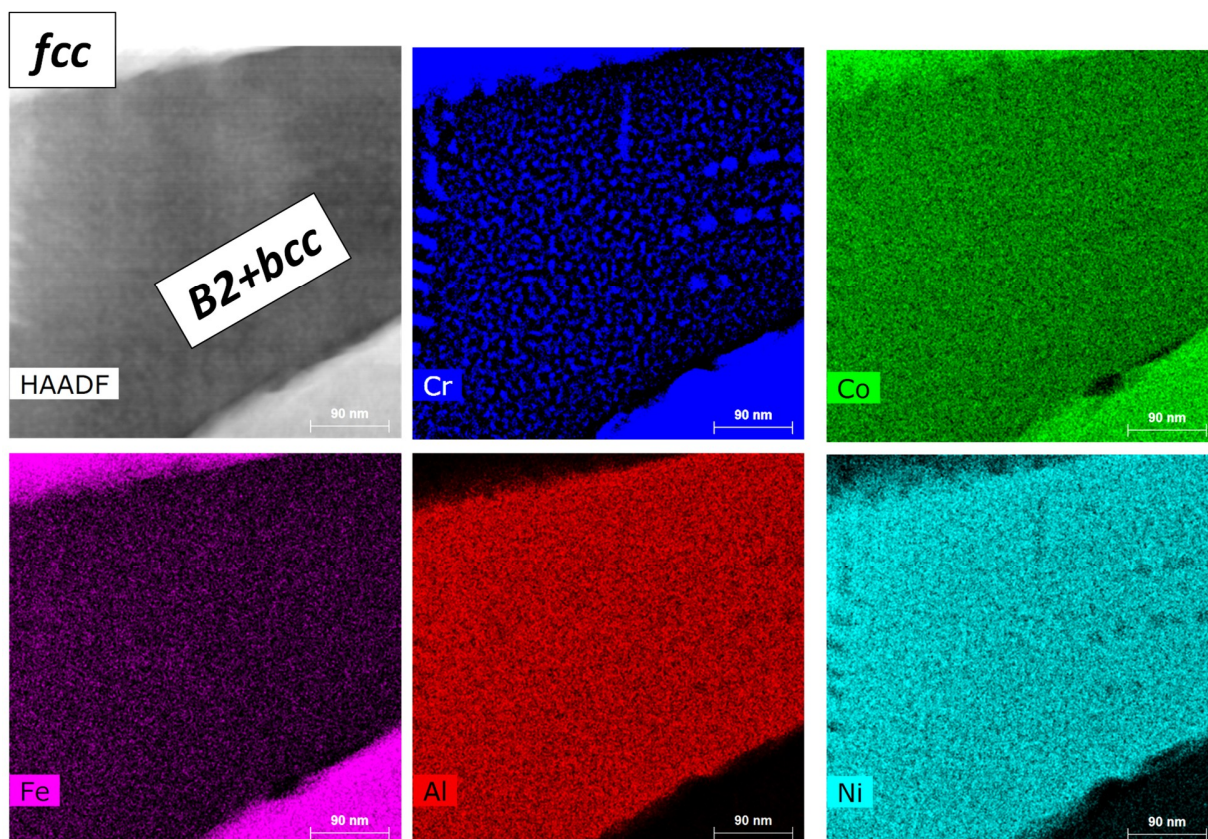


Supplementary Figure 1

HAADF STEM image and EDS maps from the HTA condition showing the compositional partitioning in a region with a magnified view of *fcc* and B2 phases. The dark contrast phase in the STEM image is B2 phase (over all rich in Al and Ni), high density nano-scale bcc precipitates can be clearly seen in the Cr map shown in blue color.

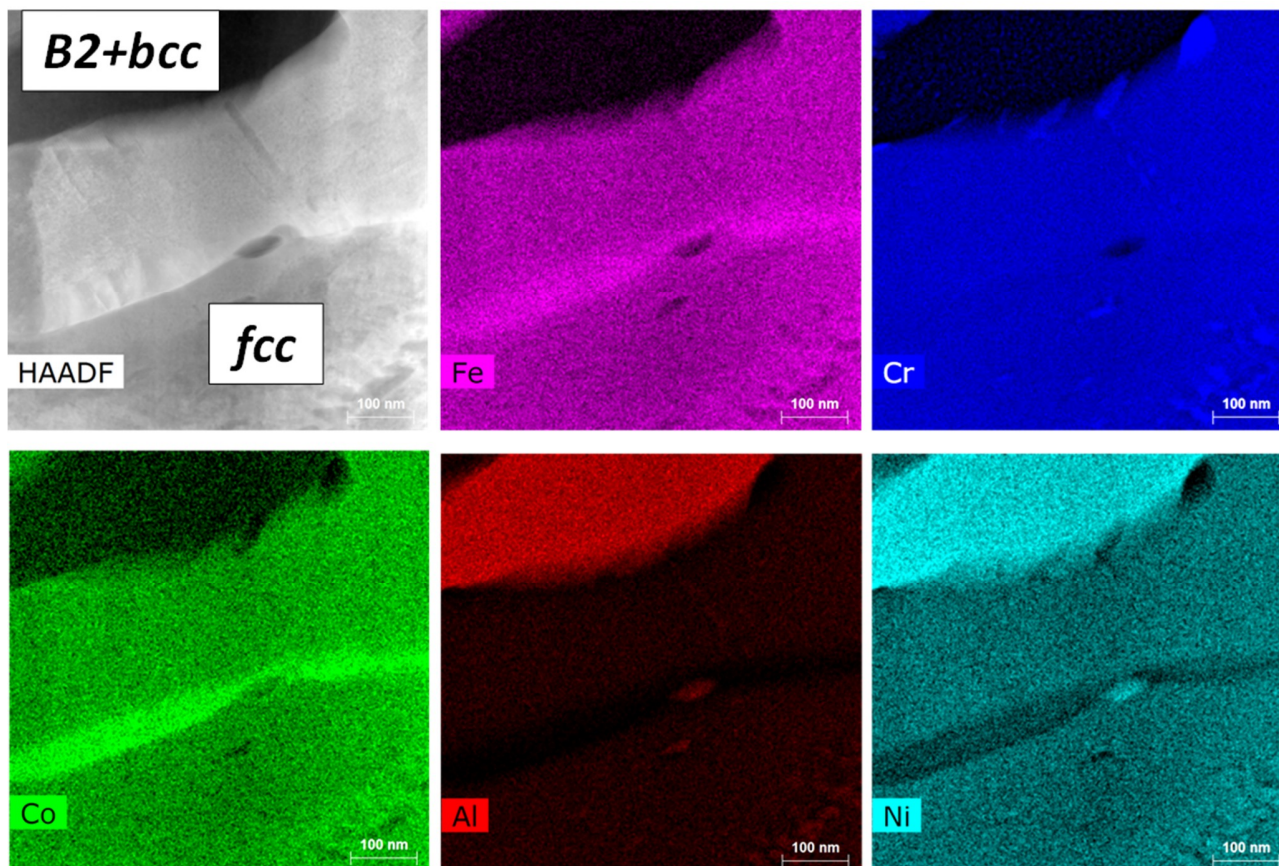


Supplementary Figure 2

HAADF STEM image and EDS maps from the HTA condition showing the compositional partitioning in a region with a magnified view of *fcc* and B2 phases. The grey/bright-contrast phase in the STEM image is *fcc* phase which is rich in Co, Cr and Al. No compositional fluctuation is evident in *fcc* phase in this heat treatment condition of the alloy.

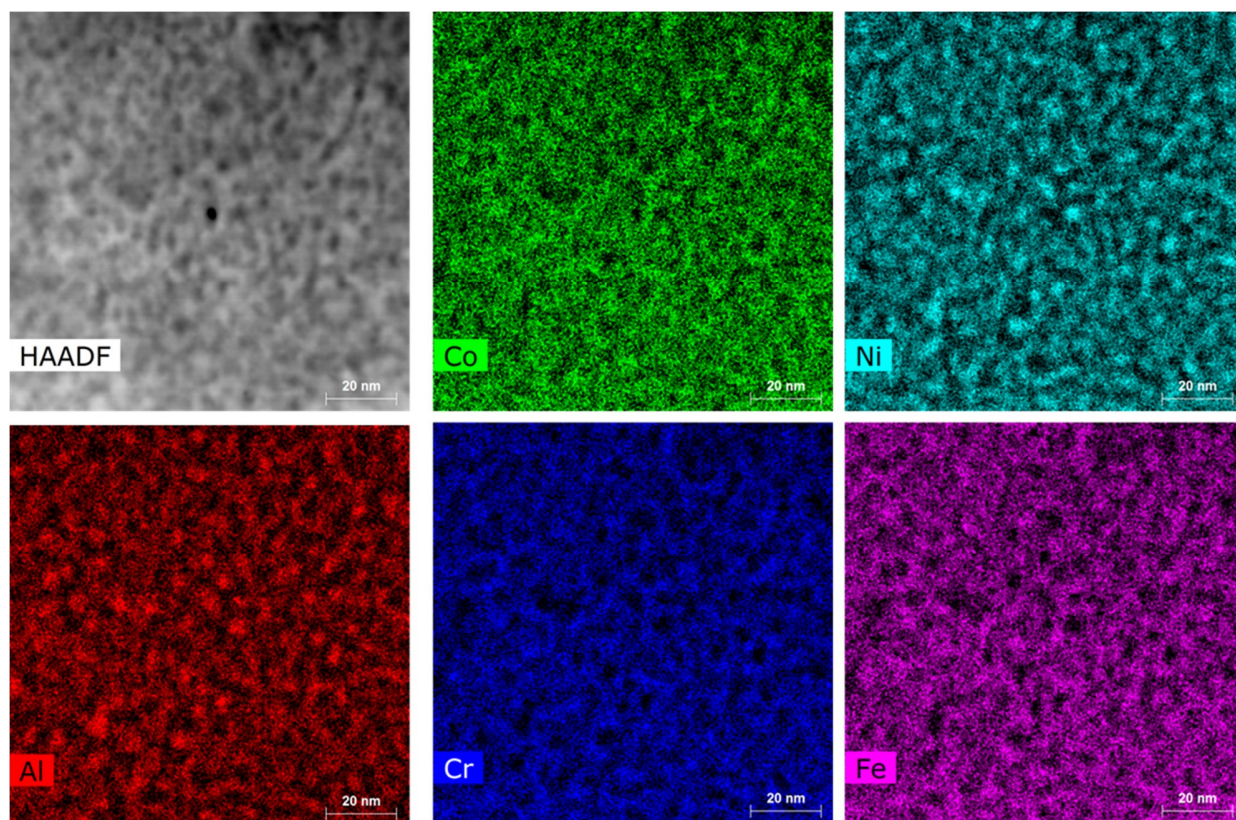


Supplementary Figure 3

HAADF STEM image and EDS maps from the HTA-580 condition showing the compositional partitioning in a region with a magnified view of *fcc* phase. The compositional fluctuations are evidently seen in *fcc* phase in STEM image (bright and dark contrast). The Al-Ni rich regions correspond to the $L1_2$ phase formed in this condition after the heat treatment at 580 °C for 24 h.

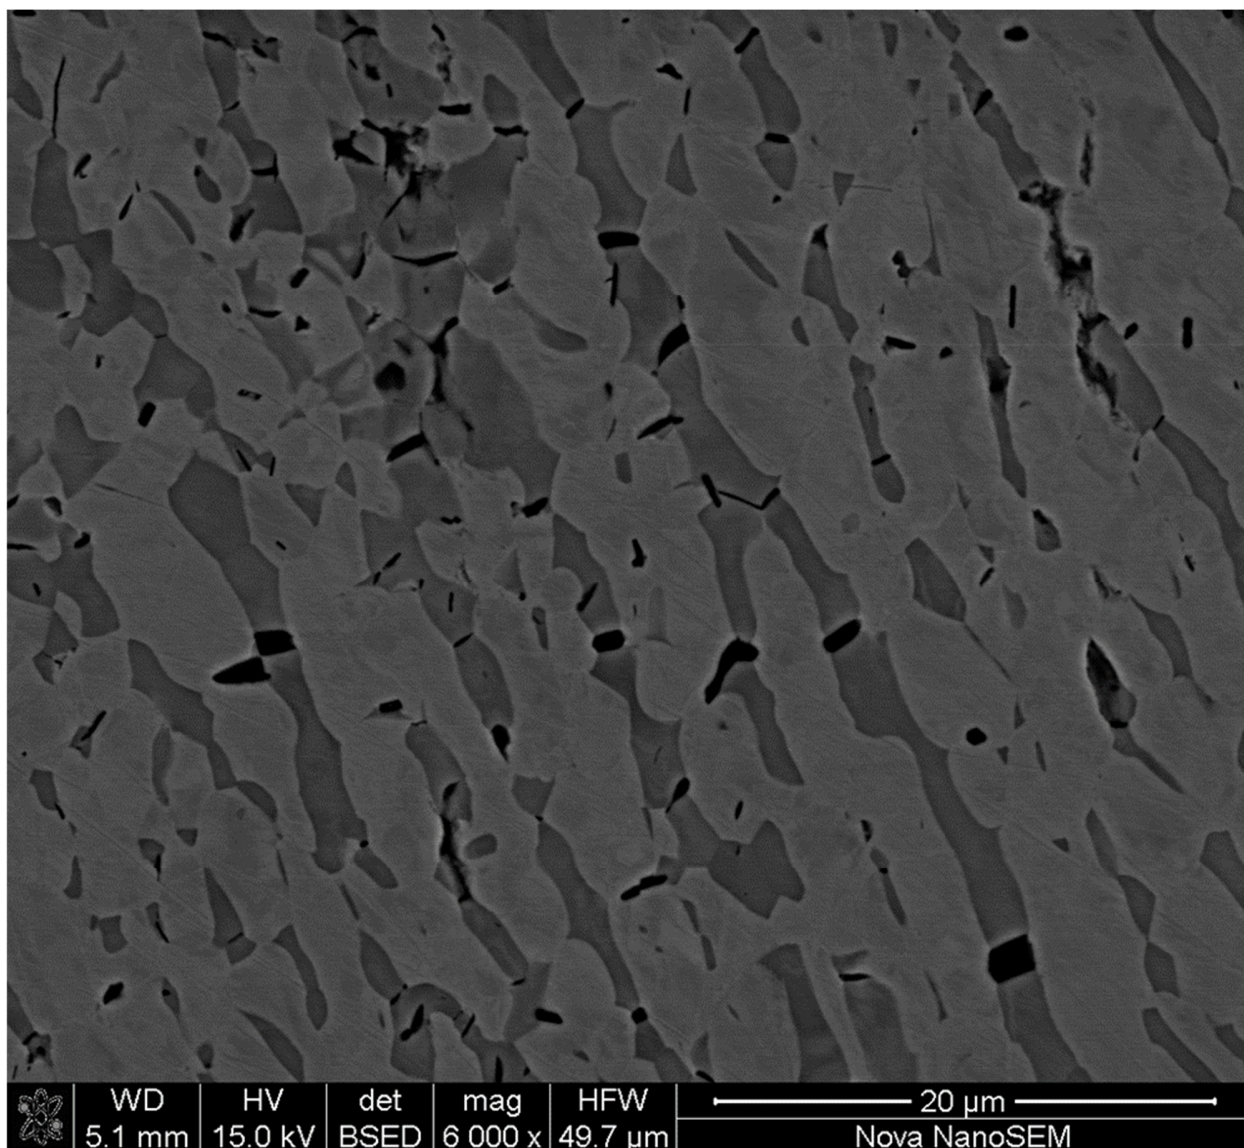

Supplementary Figure 4

SEM image from the fractured HTA:40psi sample. Note that the cracks are limited in the dark contrast B2 phase and are broadened to accommodate the plastic flow in fcc phase.

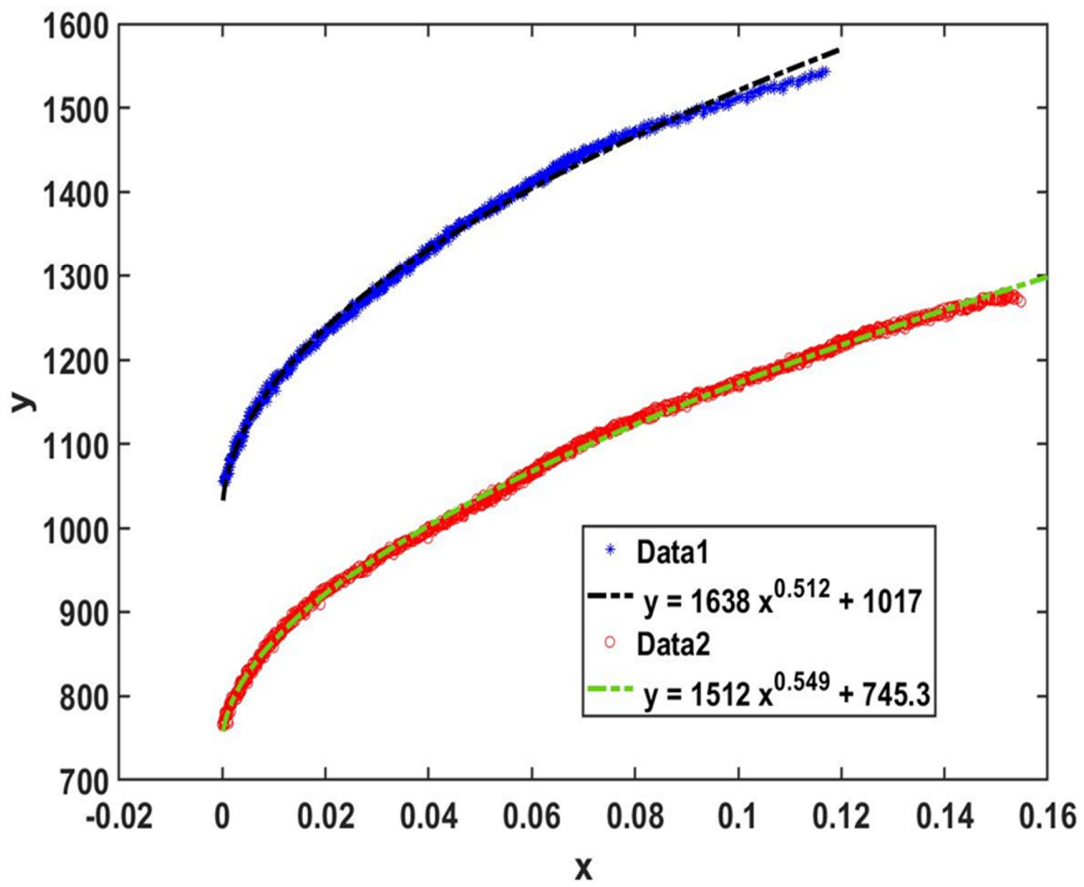

Supplementary Figure 5

Curve fitting using the equation $\sigma = k\epsilon^n$ (power law) for true stress-strain curve for HTA and HTA-580 condition.