Supplementary Information

Pyrolytic Depolymerization Mechanisms for Post-Consumer Plastic Wastes †

Kirtika Kohli [1,2], Sriraam R. Chandrasekaran [2], Ravindra Prajapati [2], Bidhya Kunwar [2], Sultan Al-Salem [3], Bryan R. Moser [4] and Brajendra K. Sharma [2,5,*]

[1] Aromatic Separation Area, Separation Process Division, CSIR-Indian Institute of Petroleum, Dehradun, Uttarakhand 248005, India
[2] Prairie Research Institute–Illinois Sustainable Technology Center, University of Illinois Urbana Champaign, Champaign, Illinois 61820, USA
[3] Environment & Life Science Research Center, Kuwait Institute for Scientific Research (KISR), Safat 13109, Kuwait
[4] United States Department of Agriculture, Agricultural Research Service, National Center for Agricultural Utilization Research, Bio-Oils Research Unit, 1815 N. University St., Peoria, Illinois 61604, USA
[5] United States Department of Agriculture, Agricultural Research Service, Eastern Regional Research Center, Sustainable Biofuels and Co-Products Research Unit, Wyndmoor, PA 19038, USA
* Correspondence: brajendra.sharma@usda.gov

† Mention of trade names or commercial products in this article is solely for the purpose of providing specific information and does not imply recommendation or endorsement by the U.S. Department of Agriculture. USDA is an equal opportunity provider and employer.

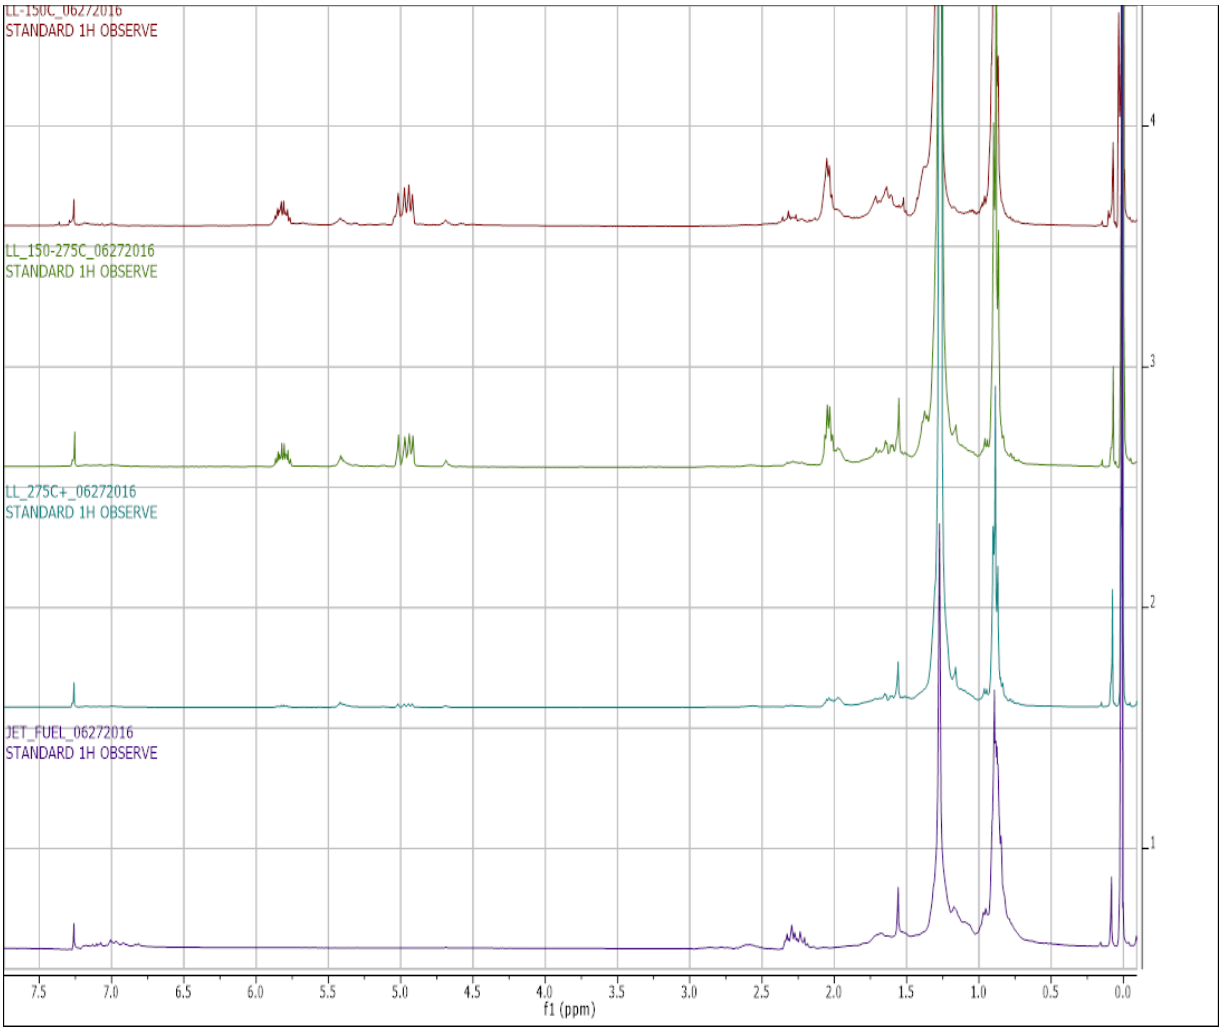


Figure S1. ^{1}H-NMR-spectra of distillate fractions i.e., gasoline range (<150°C); aviation range fuel (150-275°C); gas oil plus range (>275°C) obtained after pyrolysis of landfill liner (LL) plastic waste. A comparison with commercial jet fuel is also presented.