

Article

Transparent Electrode Based on Silver Nanowires and Polyimide for Film Heater and Flexible Solar Cell

Xin He ^{1,*}, Feng Duan ^{1,2}, Junyan Liu ¹, Qiuming Lan ¹, Jianhao Wu ¹, Chengyan Yang ¹, Weijia Yang ¹, Qingguang Zeng ^{1,*} and Huafang Wang ³

¹ School of Applied Physics and Materials, Wuyi University, Jiangmen 529020, Guangdong, China; duanfeng0922@163.com (F.D.); liujunyanwyu@126.com (J.L.); wyuqiuminglan@yeah.net (Q.L.); jhwwwyu@126.com (J.W.); yang_cy18phy@126.com (C.Y.); yangweijia5377@126.com (W.Y.)

² School of Information Engineering, Wuyi University, Jiangmen 529020, Guangdong, China

³ School of Mechanical Engineering and Automation, Wuhan Textile University, Wuhan 430200, Hubei, China; wanghfhust@163.com

* Correspondence: hexin@mail.wyu.edu.cn (X.H.); zengqg1979@126.com (Q.Z.)

Received: 27 September 2017; Accepted: 23 November 2017; Published: 29 November 2017

Supplementary

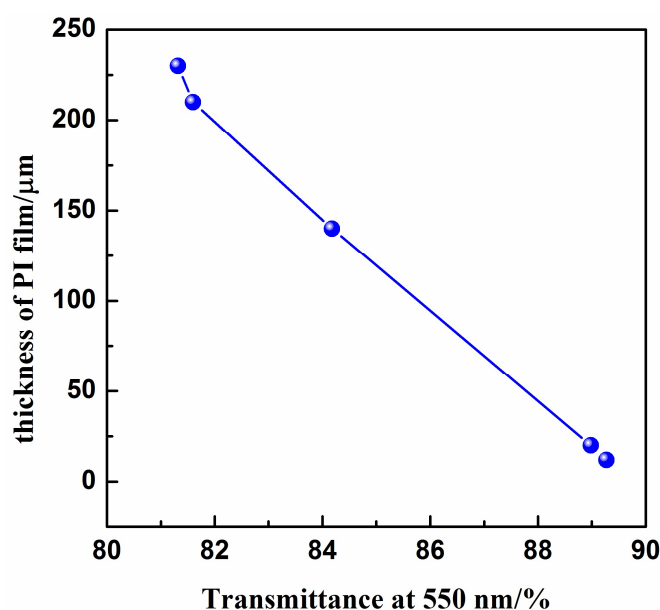


Figure S1. Plots of thickness of PI film versus transmittance at 550 nm

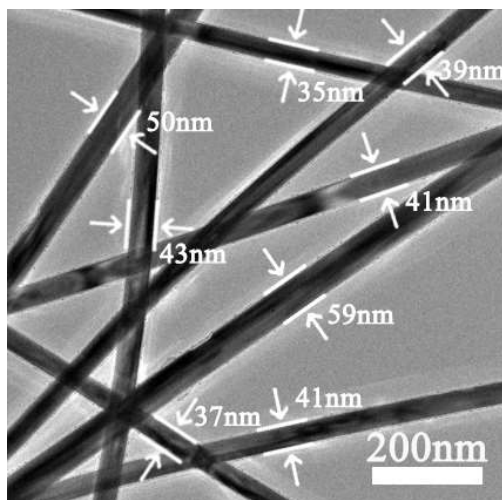


Figure S2. TEM image with a large magnification of the Ag NWs

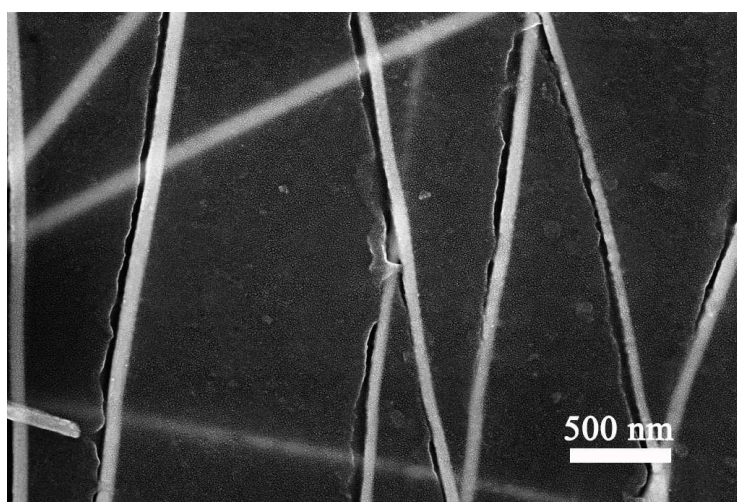


Figure S3. SEM image of the composite film with the transmittance of 80%

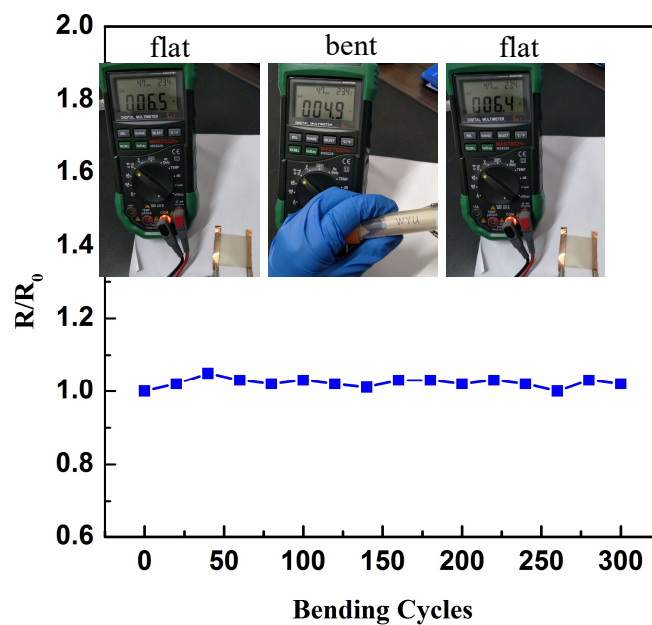


Figure S4. Variations in resistance of Ag NWs-PI composite film versus bending cycles



© 2017 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC-BY) license (<http://creativecommons.org/licenses/by/4.0/>).