



- 1 Article
- 2 Supplymentary Materials: The influence of disc
- 3 surface topography after vapour blasting on friction
- 4 and wear of sliding pairs under dry sliding
- 5 conditions
- 6 Chenhao Qian ^{1,2,*,#}, Chen Liang ^{3,#}, Ziyang He ⁴ and Weixi Ji ^{1,2,*}
- 7 ¹ School of Mechanical Engineering, Jiangnan University, Wuxi 214122, China
- ² Jiangsu Key Laboratory of Advanced Food Manufacturing Equipment and Technology, Jiangnan
 ⁹ University, Wuxi 214122, China
- School of Engineering, University of Liverpool, Liverpool L69 3GH, United Kingdom;
 Chen.Liang@liverpool.ac.uk
- Department of Computer Science, Columbia University, New York, 10027, United States;
 zh2330@columbia.edu
- 14 * Correspondence: qianch@jiangnan.edu.cn (C.Q.); jiweixi@jiangnan.edu.cn (W.J.)
- 15 *** These authors contribute equally.
- 16 Received: 17 November 2019; Accepted: 11 December 2019; Published: date

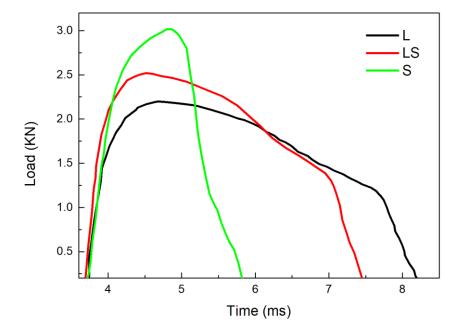


Figure 1. Charpy impact test curves of impact load-time of the samples.

17

18



© 2019 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/).