

Supplementary materials

Chestnut-Derived Activated Carbons as a Perspective Material for Energy Storage


Katarzyna Januszewicz ¹, Anita Cymann-Sachajdak ¹, Paweł Kazimierski ², Marek Klein ²,
Justyna Łuczak ³ and Monika Wilamowska-Zawłocka ^{1,*}

¹ Department of Energy Conversion and Storage, Faculty of Chemistry, Gdańsk University of Technology, Narutowicza 11/12, 80-233 Gdańsk, Poland; katjanus@pg.edu.pl (K.J.); anita.cymann@pg.edu.pl (A.C.-S.)


² Institute of Fluid Flow Machinery, Polish Academy of Sciences, 80-233 Gdańsk, Poland; pkazimierski@imp.gda.pl (P.K.); marek.klein@imp.gda.pl (M.K.)

³ Department of Process Engineering and Chemical Technology, Faculty of Chemistry, Gdańsk University of Technology, Narutowicza 11/12, 80-233 Gdańsk, Poland; justyna.luczak@pg.edu.pl

* Correspondence: monika.wilamowska@pg.edu.pl; Tel.: +48-58-347-24-74

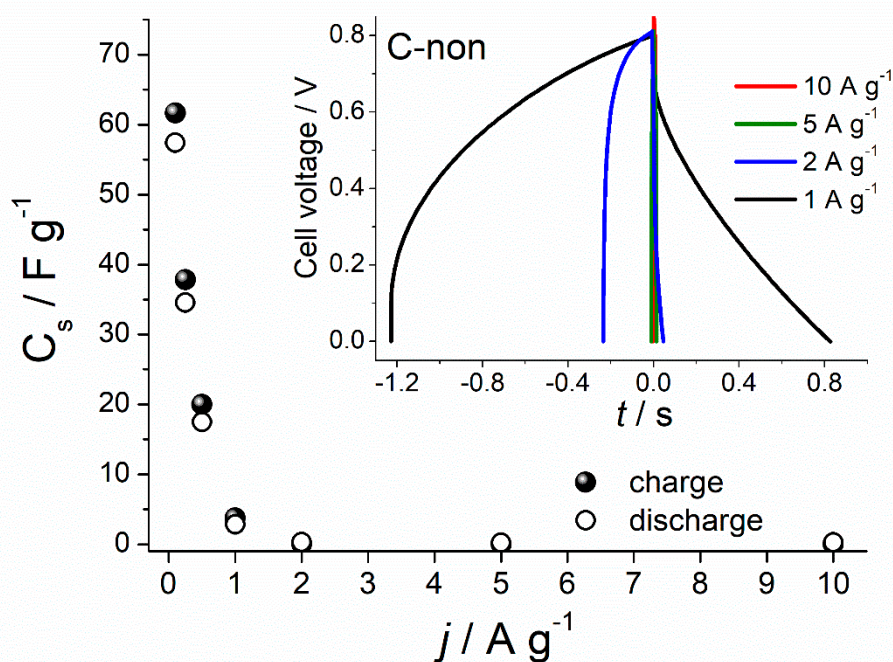

(a)

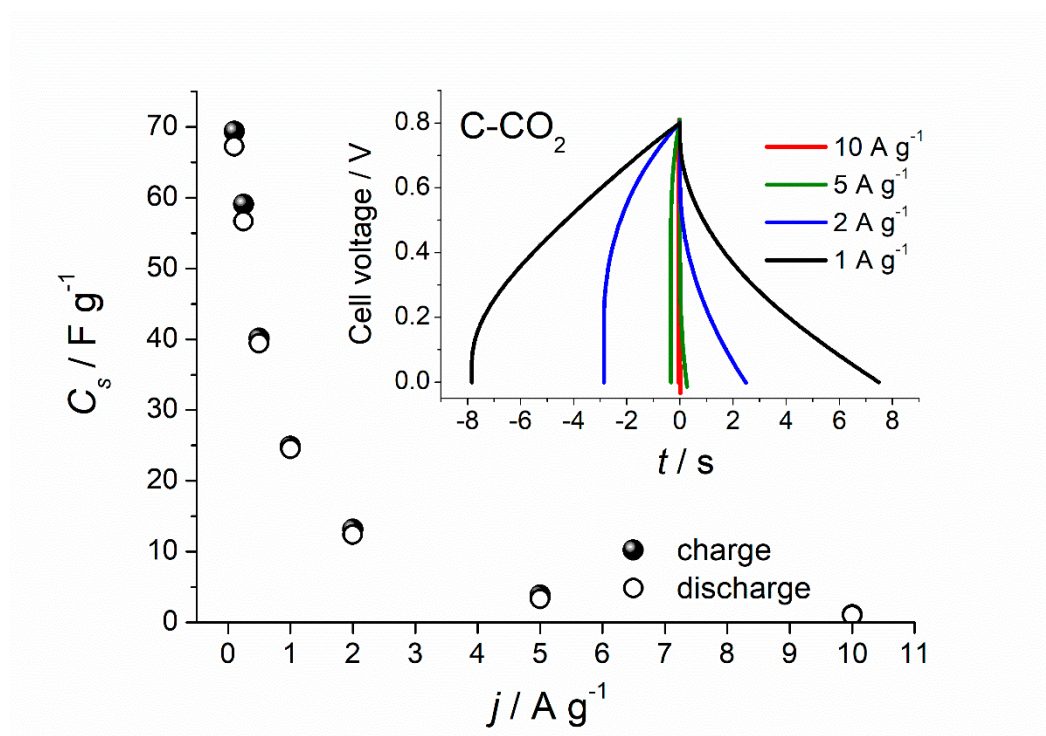

(b)

13 **Figure S1.** Specific capacitance values recorded for C-non (a) and C-CO₂ (b) samples at different
 14 current densities. Inset: GCD profiles at high current densities (1-10 A g^{-1}).