

SUPPLEMENTARY

Effect of Material and Process Variables on Characteristics of Nitridation-Induced Self-Formed Aluminum Matrix Composites—Part 1: Effect of Reinforcement Volume Fraction, Size, and Processing Temperatures

Dae-Young Kim, Pil-Ryung Cha, Ho-Seok Nam, Hyun-Joo Choi * and Kon-Bae Lee *

School of Advanced Materials Engineering, Kookmin University, 02707, Seoul, South Korea; kdy6603@kookmin.ac.kr (D.-Y.K.); cprdream@kookmin.ac.kr (P.-R.C.); hsnam@kookmin.ac.kr (H.-S.N.)

* Correspondence: hyunjoo@kookmin.ac.kr (H.-J.C.); kblee@kookmin.ac.kr (K.-B.L.); Tel.: +82-2-910-4287 (H.-J.C.); +82-2-910-4230 (K.-B.L.)

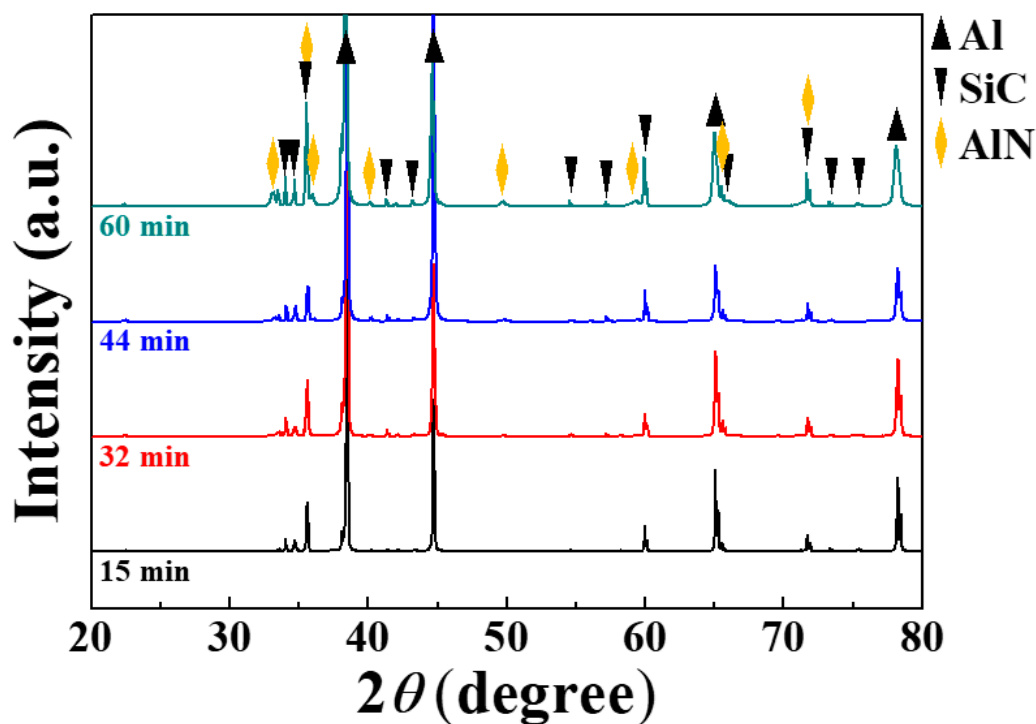


Figure S1. XRD patterns of the 20 vol.%SiC/6061Al powder beds held at 650 °C for various times.