Application of sound waves during the curing of an acrylic resin and its composites based on short carbon fibers and carbon nanofibers

Braian Uribe[1]*, Joana Rodrigues[1], Pedro Costa[1], and Maria C. Paiva[1]

[1] Institute for Polymers and Composites (IPC), University of Minho, Campus of Azurém, 4800-058 Guimarães, Portugal.
* Correspondence: brianes@dep.uminho.pt

SUPPLEMENTARY INFORMATION

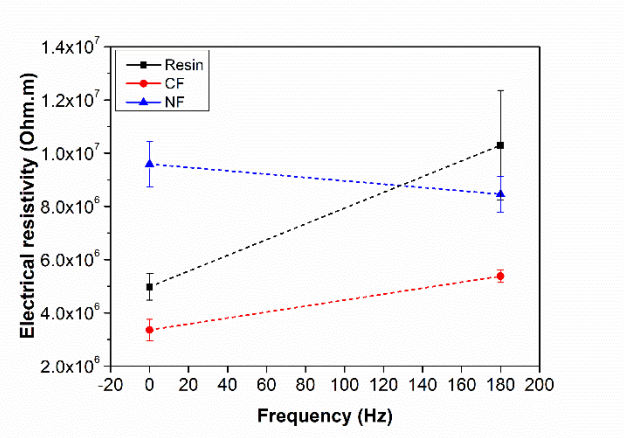


Figure S1. Electrical resistivity of polymers and composites at 0 and 180 Hz of acoustic stimulus.