

*EVS27**Barcelona, Spain, November 17-20, 2013*

## **An Evaluation Study of Current and Future Fuel Cell Hybrid Electric Vehicles Powertrains**

Omar Hegazy<sup>1</sup>, Joeri Van Mierlo<sup>1</sup>, Philippe Lataire<sup>1</sup>, Thierry Coosemans<sup>1</sup>, Jelle Smekens<sup>1</sup>, Mohamed Abdel Monem<sup>1</sup>, Noshin Omar<sup>1,2</sup>, and Peter Van den Bossche<sup>1,2</sup>

<sup>1</sup> *Vrije Universiteit Brussel, Pleinlaan 2, 1050 Brussels, Belgium*

<sup>2</sup> *Erasmus University College, Nijverheidskaai 170, Brussels 1070, Belgium*

*E-Mail corresponding author: [omar.hegazy@vub.ac.be](mailto:omar.hegazy@vub.ac.be)*

---

### **Abstract**

The powertrain control strategy and component sizing can significantly influence the vehicle performance, cost and fuel economy. This paper presents an evaluation study of the current and future Fuel Cell Hybrid Vehicles (FCHEVs) powertrains from the point of view of the fuel economy, volume, mass and cost. In this research, different FCHEV powertrains (such as Fuel Cell/Supercapacitor (FC/SC), Fuel Cell/Battery (FC/B), and FC/SC/B) and different control strategies are designed and simulated by using Matlab/Simulink. In this paper, two standard driving cycles (NEDC and FTP75) are used to evaluate the fuel consumption. Within this study, two control strategies based on the knowledge of the fuel cell efficiency map are implemented to minimize the hydrogen consumption of the FCHEV powertrains. These control strategies are control strategy based on Efficiency Map (CSEM) and control strategy based on Particle Swarm Optimization (CPSO). Furthermore, a comparative study of different FCHEV powertrains is provided for adequately selecting of the proper FCHEV powertrain, which could be used in industrial applications.

Keywords: Fuel cell Hybrid Electric Vehicle (FCHEV), Powertrain Modeling, Particle Swarm Optimization (PSO), Control Strategy, Efficiency Map Control, Fuel Economy

---

### **1 Introduction**

In recent decades, Fuel Cell (FC) technologies are expected to become a viable solution for vehicular applications because they use alternative fuel converters and are environment friendly. Although there are various FC technologies available for the use in vehicular systems, the proton exchange membrane FC (PEMFC) has been found to be a good candidate, since PEMFC has high power density with lower operating temperatures when compared to the other FC systems [1]-[4]. A stand-alone FC system integrated into an automotive powertrain is not always sufficient to satisfy the load demands of a vehicle. Although FC systems exhibit good power capability during steady-state operation, the response of fuel cells during transient and instantaneous peak power demands is relatively poor. Consequently, the high cost and slow dynamics of the FC systems are

the major challenges for the commercialization of fuel cell electric vehicles (FCEVs).

To overcome these challenges, the FC system should be hybridized with single or multiple energy storage systems (ESS) (such as battery and supercapacitor) to meet the total power demand of a hybrid electric vehicle (HEV) and to improve the efficiency [5], [7], [8], [9]. In the last decades, many research studies in the power distribution strategy of hybrid vehicles and sizing have been done. Some control algorithms, based on a priori knowledge of a scheduled driving cycle, have been proposed to achieve fairly fuel economy with minimum cost [3]-[9]. For example, in [6], [7], the power management and the design optimization of FC / battery HEV were obtained by using dynamic programming (DP). However, this methodology did not consider the variation of the battery parameters in function of the state of charge (SoC).

Furthermore, the DP can achieve the minimum value, but it has many drawbacks such as high computational load and high memory storage capacity. In [7], [8], [9], PSO algorithm was proposed to achieve the optimal design and power flow of FC/battery and FC/supercapacitor hybrid electric vehicles.

The main objective of this paper is to give an evaluation study of different FCHEV powertrains from the point of view of the fuel economy, cost and powertrain component sizing. In addition, the FCHEV powertrains are designed and simulated by using Matlab/Simulink over different driving cycles (such as NEDC and FTP75). CSPSO and CSEM control strategies are utilized to minimize the fuel consumption. This paper is organized as follows: Section II presents the FCHEV powertrains description. The modeling of the vehicle, the dynamic modeling of a PEMFC, the dynamic modeling of the battery system and the dynamic modeling of the SC are described in section III. The control strategies (CSPSO and CSEM) are illustrated in section IV. Simulation results are presented in Section V. Section VI is the conclusion.

## 2 FCHEV Powertrains

The investigation of different FCHEV powertrains (i.e., FC/B, FC/SC, and FC/B/SC) is explained in detail. In this paper, an interleaved Multiple-input power electronics converter (IMIPEC) is used to connect multiple sources with common dc-link in order to reduce the size of the passive components of the DC/DC converter and to reduce the input/output ripples. The IMIPEC can improve the efficiency of the DC/DC converter, which is used in vehicle powertrain especially at low load. In the IMIPEC, the FC is connected to DC-link via a three-phase interleaved boost DC/DC port ( $\eta_B = \eta_{conv}$ ), while the battery and SC are connected to DC-link through bidirectional three-phase interleaved DC/DC ports ( $\eta_{B/B} = \eta_{conv}$ ). In this study, the desired value of the DC-link voltage is selected to be 500 V with variations of  $\pm 5\%$  are permissible.

The power supplied by the powertrain has to be obtained from the power demand predicted by the dynamics of the vehicle. The efficiency of each component in the FCHEV powertrain is considered in this study. The detailed models of the powertrain are developed by using Matlab/Simulink. Figure 1, Fig. 2 and Fig. 3 illustrate the block diagrams of the FC/B powertrain, FC/SC powertrain and FC/B/SC powertrain, respectively.

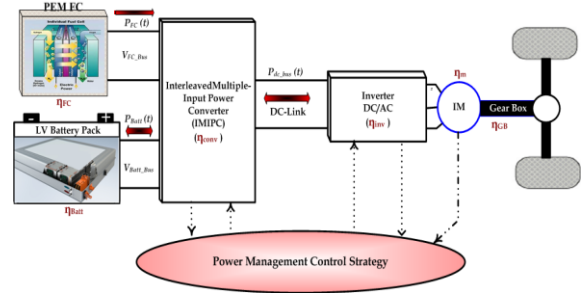


Figure 1: Block Diagram of FC/Battery HEV powertrain

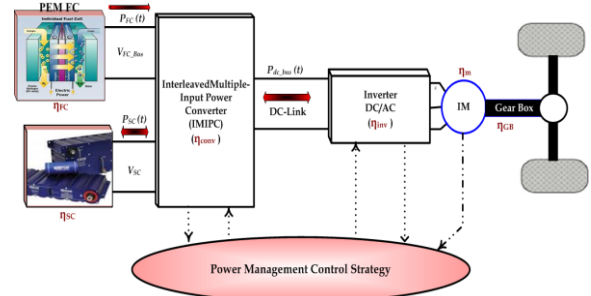


Figure 2: Block Diagram of FC/SC HEV powertrain

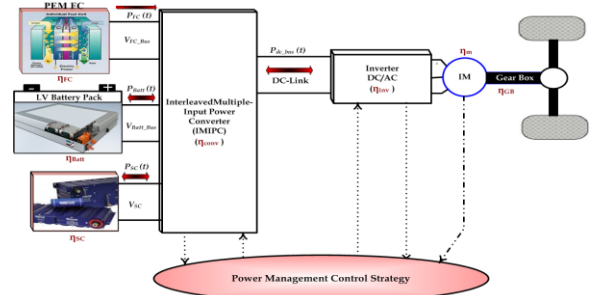


Figure 3: Block Diagram of FC/B/SC HEV powertrain

## 3 Powertrain Modeling

### 3.1 Modeling of the vehicle power demand

The load force of the vehicle comprises gravitational force ( $F_g$ ), rolling resistance ( $F_{roll}$ ), aerodynamic drag force ( $F_{AD}$ ) and acceleration force ( $F_{acc}$ ), as shown in Fig.4. Hereby, the required load power for vehicle acceleration can be written as follows:

$$P_{load} = \frac{(F_g + F_{roll} + F_{AD} + F_{acc}) V}{\eta_{GB}} \quad (1)$$

Where

$$\begin{aligned} F_g &= M \cdot g \cdot \sin(\alpha) \\ F_{roll} &= M \cdot g \cdot f_r \cdot \cos(\alpha) \\ F_{AD} &= 0.5 \rho_a \cdot C_D \cdot A_F \cdot V^2 \\ F_{acc} &= M \cdot \frac{dV}{dt} \end{aligned} \quad (2)$$

$$V = \omega_w \cdot r_w$$

The total electric power required from the sources is given by

$$P_{req} = \frac{P_{load}}{\eta_m \cdot \eta_{Inv} \cdot \eta_{conv}} \quad (3)$$

The parameters of the vehicle are reported in Table 1. The analysis of FCHEV powertrains is performed on two standard driving cycles (such as *NEDC* and *FTP75*) in order to evaluate their performance. In this paper, suppose that the average efficiencies of the gearbox ( $\eta_{GB}$ ), the motor ( $\eta_m$ ), inverter ( $\eta_{Inv}$ ), and DC/DC converter ( $\eta_{Conv} = \eta_B = \eta_{B/B}$ ) are 0.90, 0.95, 0.94 and 0.95, respectively.

Table 1: The vehicle parameters [5], [8],[9]

$M$	Vehicle mass (kg)	1450
$f_r$	Rolling Resistance Coefficient	0.013
$C_D$	Aerodynamic Drag Coefficient ( $C_D$ )	0.29
$A_f$	Front Area (m <sup>2</sup> )	2.13
$r_w$	Radius of the wheel (m)	0.28
$\rho_a$	Air density (kg/m <sup>3</sup> )	1.202

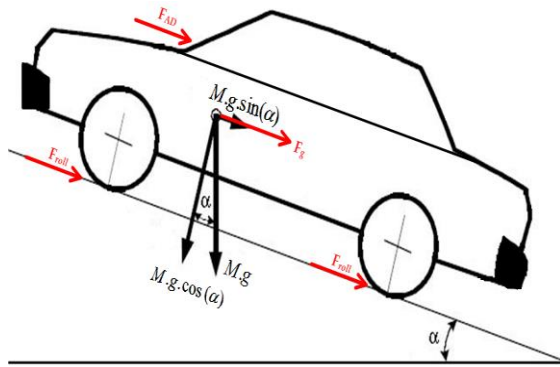


Figure 4: Forces acting on a vehicle

### 3.2 Dynamic Modeling of a PEMFC

The electrical model of the PEMFC system predicts the output voltage and the partial pressures of hydrogen and oxygen in the FC stack at a certain electric current. The voltage signal is fed to a control voltage source in Matlab/simulation. In this study, FC system comprises a FC stack with  $N_{fcs}$  cells that are connected in series, and  $N_{fcp}$  strings that are connected in parallel. The output voltage of the FC stack can be calculated as follows [3], [7], [9]:

$$V_{fc} = E + \eta_{act} + \eta_{ohmic} \quad (4)$$

where

$$\eta_{act} = -B \ln(CI_{fc}) \quad (5)$$

$$\eta_{ohmic} = -R^{int} I_{fc} \quad (6)$$

$$E = N_{fcs} \left[ E_0 + \frac{RT}{2F} \log \left[ \frac{p_{H2} \sqrt{p_{O2}}}{p_{H2O}} \right] \right] \quad (7)$$

The Matlab/Simulink-based PEMFC system is modeled in this paper using the aforementioned equations. The specifications of the PEMFC system are mentioned in Appendix A.

### 3.3 Dynamic Modeling of an ELDC

The natural structure of the supercapacitor (SC) is appropriate to meet the transient and instantaneous peak power demands. The SC is also known as electrochemical double layer capacitors (ELDCs). The simulated ELDC is a Maxwell PC2500 whose characteristics are reported in Appendix A. The ELDC Module consists of  $N_{scs}$  cells that are connected in series and  $N_{scp}$  strings that are connected in parallel. The output voltage of the ELDC can be expressed as follows [3], [7], [9]:

$$V_{SCcell} = i_{cell} \cdot R_s + v_c \quad (8)$$

where

$$v_c = \frac{1}{C} \int i_c(t) dt + v_c(t=0) \quad (9)$$

$$i_c = i_{cell} + \frac{i_c}{R_p} \quad (10)$$

$$SoCsc = \left( \frac{v_c}{V_{cell,max}} \right)^2 \cdot 100 \quad (11)$$

$$v_c(t=0) = V_{cell,max} \cdot \sqrt{\frac{SoCsc0}{100}} \quad (12)$$

### 3.4 Dynamic Modeling of Li-Ion Battery

In this section, the mathematical modeling of the Li-Ion battery package used in the simulation program is defined as a Thevenin battery model. In this study, all elements are functions of the battery state of charge (*SoCb*). The battery system comprises a package with  $N_{batts}$  cells that are connected in series and  $N_{battp}$  that are connected in parallel. The terminal voltage of the battery pack  $V_{batt}$  can be denoted as follows [8], [9]:

$$V_{batt} = N_{batts} [V_{oc} + I_{batt} R_{sb} - V_{cp}] \quad (13)$$

$$SoCb = SoCb_{init} + \frac{1}{3600} \int \frac{I_{batt}}{C_b} dt \quad (14)$$

Where:

$$I_{batt} = \frac{I_{Load}}{N_{battp}} \quad (15)$$

$$\frac{dV_{cp}}{dt} = -\frac{V_{cp}}{C_p R_p} + \frac{I_{batt}}{C_p} \quad (16)$$

## 4 Power Control Strategies

### 4.1 Control Strategy Based on Efficiency Map (CSEM)

This control strategy is applied to minimize the hydrogen consumption for each driving cycle. Therefore, the simulations are performed for each driving cycle in such a way that the FC works alternately in two operating points, namely “On” and “Off”, according to the actual state of charge of the energy storage system (ESS) ( $SoC_{ESS}(k)$ ). These operating points are given as follows [3], [7], [8]:

- 1- When  $SoC_{ESS}(k) < SoC_{init}$ , the FC is operated at its point of maximum efficiency (called “On” point), and
- 2- When  $SoC_{ESS}(k) > SoC_{init}$ , the FC is turned off (called “Off” point).

Where  $SoC_{init}$  represents the initial state of charge, where  $SoC_{ESS}(k)$  is the actual SoC of the ESS. Figure 5 shows the CSEM control scheme with the FC operation to perform the operation of the system.

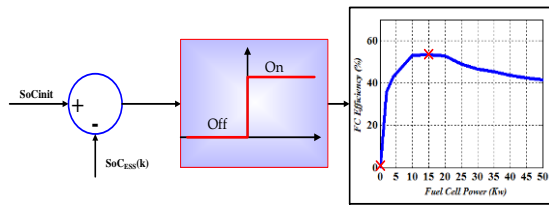


Figure 5: The scheme of the control strategy based on Efficiency Map (CSEM)

### 4.2 Control Strategy Based on PSO (CSPSO)

The main objective of the CSPSO is to instantaneously distribute the power between the multiple sources with the aim to minimize the hydrogen consumption while maintaining the SoC of the ESS over the driving cycle [5], [6]. Figure 6 illustrates the block diagram of the optimal power control based on CSPSO. It can be observed in Figure 6 that the input variables of the CSPSO control scheme are the demand power from the energy sources, the SoC of the ESS (defined by SC or battery), and the driving cycle, while the outputs are the optimal power of the FC and ESS. The parameters of the PSO, which are used in this study, are mentioned in Appendix A.

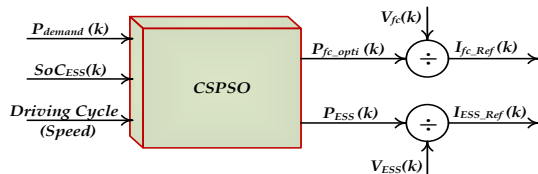


Figure 6: The block diagram of the optimal power sharing

The sum of power from both sources has to be equal to the required power at all times [9]:

$$P_{req}(t) = P_{fc}(t) + P_{ESS}(t) \quad (17)$$

And

$$k_{fc}(t) = P_{fc}(t)/P_{req}(t) \quad (18)$$

The net energy consumed from the FC at time  $t$  can be computed as follows:

$$E_{fc}(t) = \int_0^t \frac{P_{fc}(t)}{\eta(P_{fc}(t))} dt \quad (19)$$

Then, the hydrogen consumption of the FC is calculated by

$$M_{H2} = \frac{1}{E_{low,H2}} \int_0^t \frac{P_{fc}(t)}{\eta(P_{fc}(t))} dt \quad (20)$$

where  $M_{H2}$  is the hydrogen mass, and  $E_{low,H2}$  is the lower heating value of the hydrogen, here  $E_{low,H2} = 120 \text{ MJ/kg}$ .

In this study, the components of the fitness vector are the fuel consumption,  $H_2$ , and the variation of the SoC, which have to be minimized. The cost function can be formulated as follows:

$$F(x) = \frac{1}{E_{low,H2}} \sum_{k=0}^N \frac{P_{fc,opti}(k)}{\eta(P_{fc,opti}(k))} \Delta T \quad (21)$$

The Optimal FC power output ( $P_{fc,opti}$ ) is calculated based on the SoC of the ESS and power demand  $P_{req}$  as follows:

$$P_{fc,opti}(k) = k_{fc}(k) \cdot P_{req}(k) + k_{soc}(k) (P_{fc,max} - P_{fc,min}) \left[ \frac{SoC_{ref} - SoC(k)}{(SoC_{max} - SoC_{min})^2} \right] \quad (22)$$

where  $N = T/\Delta T$  is the number of samples during the driving cycle [T] and  $\Delta T = 1 \text{ sec}$  is the sampling time. In this paper, the time is only discretized because the standard driving cycles are defined every 1 sec.

In this article, the control objective is to determine the value  $k_{fc}$ , degree of hybridization, for each  $t$  in  $[0, T]$ , which minimizes the fuel consumption (hydrogen), and to evaluate the proportional controller gain  $k_{soc}$  which maintains the  $SoC_{ESS}$  ( $SoC_{ESS}(T) = SoC_{init}$ ) during the charging period from the FC.

## 5 Simulation Results

To investigate the FCHEV powertrains, the required vehicle performance and the power of the powertrain corresponding to standard driving cycles (such as NEDC and FTP75) are simulated and presented. Furthermore, a comparative study of the vehicle performance between FC/B, FC/SC and FC/B/SC powertrains is provided in order to select the appropriate powertrain. Simulation

results are obtained by using Matlab/Simulink and SimPowerSystems by implementing the detailed mathematical and electrical models of the FCHEV powertrains that are described earlier in Section 2.

Figure 7 and Fig.8 show the comparative of the cost and the mass of the FC and ESS at different driving cycles, respectively. The volume of the FC and ESS of each powertrain is shown in Fig.9.

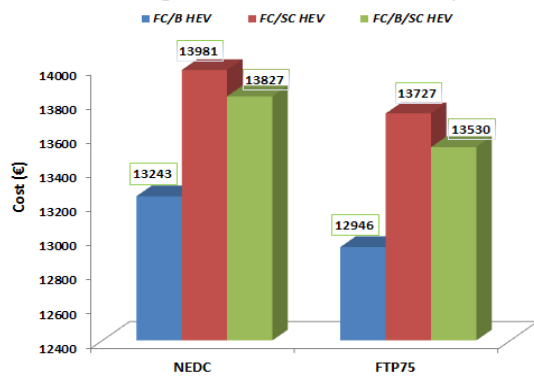


Figure 7: Comparison of the total cost of the electric sources based driving cycles

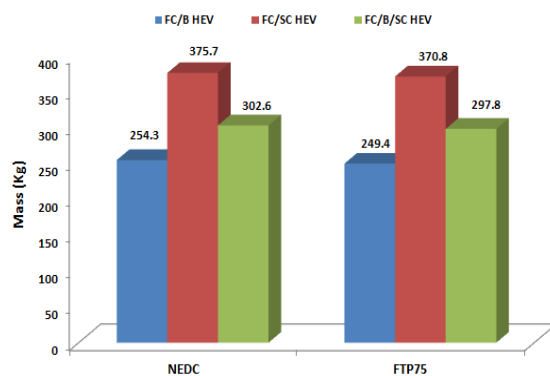


Figure 8: Comparison of the total mass of the electric sources based driving cycles


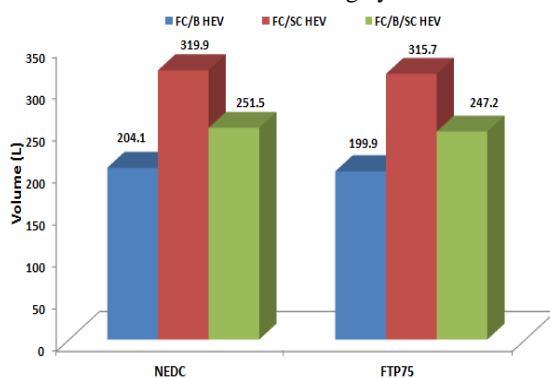



Figure 9: Comparison of the total volume of the electric sources based driving cycles

Figure 10 demonstrates the comparative of the hydrogen improvement between the FCHEV powertrains over different driving cycles. For example, Fig. 11 presents the power sharing between the FC and SC, and the evolution of the SoCsc during

CSPSO running on the NEDC driving cycle. Figure 12 presents the power sharing between the FC and battery, and the evolution of the SoCb during CSPSO running on the NEDC driving cycle. Furthermore, Fig. 13 shows the power sharing between the FC, SC and battery when applying the CSPSO on the NEDC driving cycle.

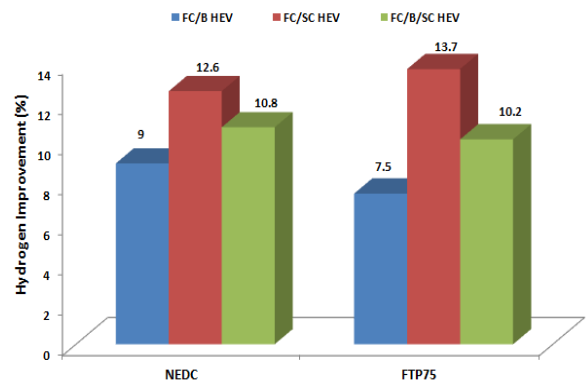

(a) The hydrogen improvement after using CSEM

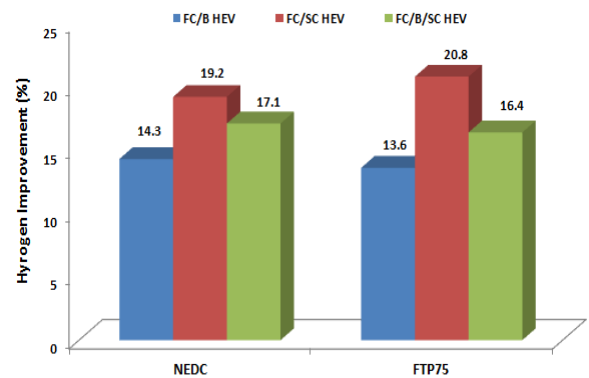

(b) The hydrogen improvement after using CSPSO

Figure 10: The hydrogen improvements with respect to FC alone without hybridization with ESS

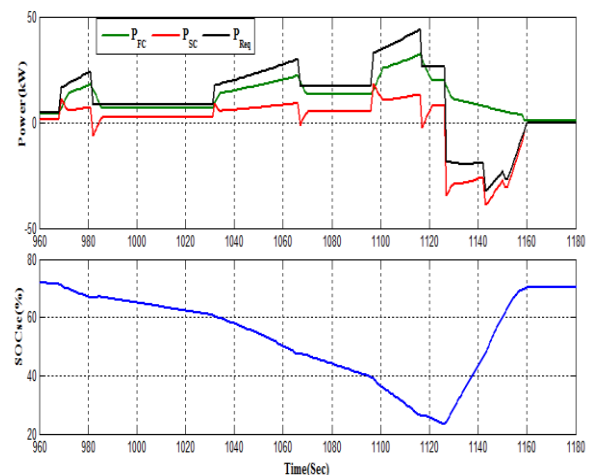


Figure 11: The optimal power splitting between FC and SC running on NEDC based CSPSO





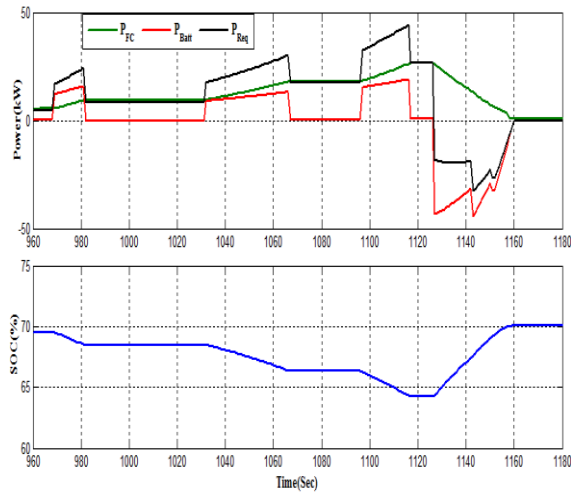



Figure 12: The optimal power splitting between FC and Battery running on NEDC based CSPSO

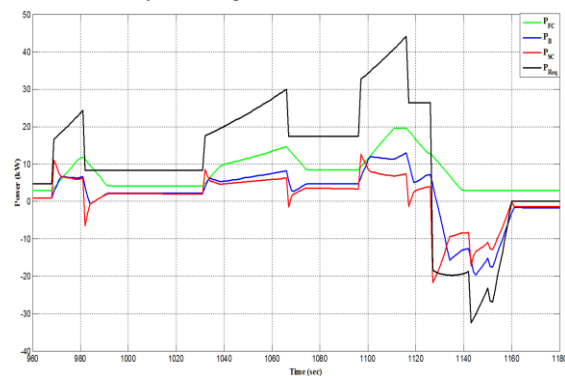

(a) Power sharing between sources

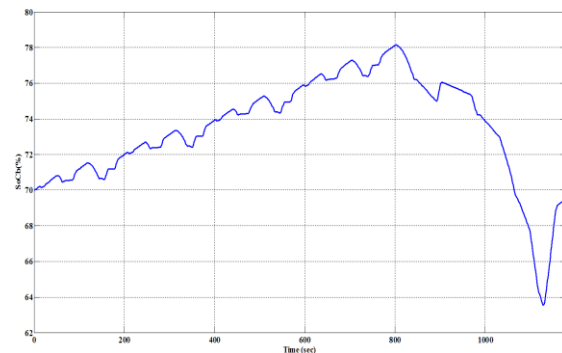

(b) State of charge of the battery

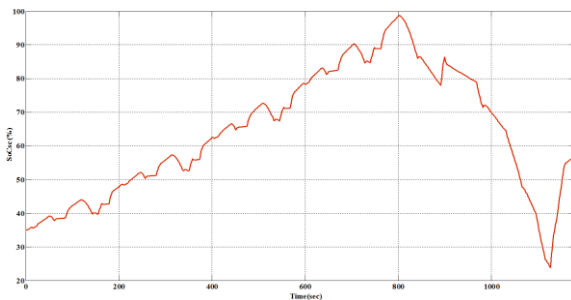

(c) State of charge of the SC

Figure 13: The optimal power splitting between FC, SC and Battery running on NEDC based CSPSO

## 6 Conclusion

This paper gives an evaluated study of different fuel cell hybrid electric vehicle powertrains from the point of view of the fuel economy, cost, mass and volume. In this paper, three powertrains are considered and investigated over different driving cycles including the efficiency of each component. These powertrains are Fuel Cell/Supercapacitor (FC/SC) HEV, Fuel Cell/Battery (FC/B) HEV, and FC/B/SC HEV. In addition, two control strategies (i.e. CSPSO and CSEM) have been used to minimize the fuel consumption.

By evaluating and comparing the results, the FC/SC HEV has slightly higher fuel economy than the FC/B HEV and FC/B/SC HEV powertrains. This is due to the use of the efficient supercapacitors for the majority of the transient-power requirements (the SC can be charged or discharged at a high current, in which the battery cannot function at this current). The fuel economy is higher despite the fact that the vehicle is heavier and more expensive. It is important to point out that FC/B/SC HEV may provide a good solution for FCHEVs from the point of view of battery lifespan, component sizing and transient periods. Finally, it is shown that the selection of the appropriate FCHEV configuration and control strategy are very important for the development of the FCHEV powertrains. It is necessary to evaluate the advantages and drawbacks of the different powertrains, particularly for future vehicle generations.

## Appendix A

Table A1: PEMFC Model Parameters [7], [8], [9]

Activation voltage constant (B)	0.04777(A <sup>-1</sup> )
Activation voltage constant (C)	0.0136 [V]
Faraday's constant (F)	96484600 [C/kmol]
FC internal resistance (R <sub>int</sub> )	0.00303 (Ω)
No load voltage (E <sub>0</sub> )	0.95 V
Nominal voltage	0.81 V
Nominal power per cell	3.4 W
FC absolute temperature (T)	343 [K]
Utilization factor (U)	0.85
Universal gas constant (R)	8314.47 [J/ kmol K]
Volume (V1)	0.0142
Cost (C1) (€) per cell	1
Weight (M1)	16.28 g

Table A2: The cell battery parameters [8], [9]

Li-Ion battery			
Nominal cell Voltage [V]	3.3	Mass (kg) [M2]	0.365
Energy (Wh/kg)	80.2	Volume (L) [V2]	0.220
Power (W/kg)	383.3	Cost (€) [C2] per cell	9.22

Table A3: The used parameters of the SC [7], [8], [9]

Capacitance ( $C$ )	2500 F
Internal resistance ( $R_s$ )	0.65m $\Omega$
The parallel resistance ( $R_p$ )	2k $\Omega$
Max_ Cell voltage [ $V_{maxcell}$ ]	2.5 V
Initial State of Charge ( $SoCSC0$ )	80%
Rated current	625 A
Weight (M2)	725 g
Volume (V2)	0.6 L
Cost ( $C2$ ) (€) per cell	14.38

Table A4: PSO Parameters and Bounds [6]

Parameter	Value	Parameter	Value
Population size	20	r1	[ 0,1]
Max. iteration	100	r2	[ 0,1]
c1	0.5	Lower Bound [ $K_{soc}$ ]	0
c2	0.5	Upper Bound [ $K_{soc}$ ]	10
Max. weight	1.2	Lower Bound [ $K_{fc}$ ]	0
Min. weight	0.1	Upper Bound [ $K_{fc}$ ]	1

## References

- [1] Mehrdad Ehsani, Yimin Gao, and Ali Emadi, "Modern Electric, Modern Hybrid, and Fuel Cell Vehicles", Book, © 2010 by Taylor and Francis Group, LLC
- [2] Xiangjun Li, Liangfei Xu, Jianfeng Hua, Jianqiu Li, Minggao Ouyang, "Control Algorithm of Fuel Cell/Battery Hybrid Vehicular Power System", IEEE Vehicle Power and Propulsion Conference (VPPC), September 3-5, 2008, Harbin, China
- [3] M. Uzunoglu, and M. S. Alam, "Modeling and Analysis of an FC/ UC Hybrid Vehicular Power System Using a Novel-Wavelet-Based Load Sharing Algorithm" IEEE Transactions on Energy Conversion, March 2008, Issue 1, Vol. 23.
- [4] Kim, M. J and Peng, H., "Power management and design optimization of fuel cell/battery hybrid vehicles", Journal of Power Sources, Vol. 165 No. 2, pp. 819-32, 2007
- [5] Ying Wu, Hongwei Gao "Optimization of Fuel Cell and Supercapacitor for Fuel-Cell Electric Vehicles" IEEE Transactions on Vehicular Technology, Vol. 55, No. 6, November 2006.
- [6] Olle Sundström and Anna Stefanopoulou, "Optimal Power Split in Fuel Cell Hybrid Electric Vehicle with different Battery Sizes, Drive Cycles, and Objectives", Proceedings of the 2006 IEEE International Conference on Control Applications Munich, Germany, October 4-6, 2006.

Sinoquet, D., Rousseau, G. and Yohan, M., "Design optimization and optimal control for hybrid vehicles", Journal of Optimization and Engineering, Vol. 12, No. 1/2, pp. 199-213, 2009.

- [7] Hegazy, O., and Van Mierlo, J., "Particle Swarm Optimization for Optimal Powertrain Component Sizing and Design of Fuel cell Hybrid Electric Vehicles", 12th International Conference on Optimization of Electrical and Electronic Equipment, IEEE OPTIM 2010
- [8] Hegazy, O., and Van Mierlo, J., "Optimal Power Management and Powertrain Components Sizing of Fuel Cell/Battery Hybrid Electric Vehicles Based on Particle Swarm Optimization", International Journal of Vehicle Design, s.l. : Inderscience Publishers, July 2012, Issue 2/3/4, Vol. 58, pp. 200-222
- [9] Hegazy, O., Van Mierlo, J., Barrero, R., Omar, N., and Lataire, P., "PSO Algorithm-based optimal power flow control of fuel cell / supercapacitor and fuel cell / battery hybrid electric vehicles", The international journal for computation and mathematics in electrical and electronic engineering, issue 1, Vol.32, 2013, pp:86-107.

## Authors



**Dr. ir. Omar Hegazy**

Vrije Universiteit Brussel

Email: [omar.hegazy@vub.ac.be](mailto:omar.hegazy@vub.ac.be)

Omar Hegazy (M'09) was born in Cairo, Egypt, in 1978. He received the B.Sc. (Hons.) and M.Sc. degrees in electrical engineering from Helwan University, Cairo and the Ph.D. degree (with the greatest distinction) from the Department of Electrical Machines and Power Engineering (ETEC), Vrije Universiteit Brussel (VUB), Brussels, Belgium, in July 2012. He is an assistant professor at Helwan University-faculty of engineering in the field of power electronics and electric drives. He is currently a postdoctoral fellow at ETEC and MOBI team at VUB. He is the author of more than 40 scientific publications. He is a member of IEC standards for wireless power transfer systems. Currently, he is involved in different FP7 projects (such as Safedrive and Unplugged). His current research interests include power electronics, drive systems, electric vehicles, (plug-in) hybrid electric vehicles, power management strategies, battery management systems, renewable energy, control systems, and optimization techniques.



**Prof. Dr. ir. Joeri Van Mierlo**

Vrije Universiteit Brussel

Email: [jvmierlo@vub.ac.be](mailto:jvmierlo@vub.ac.be)

Joeri Van Mierlo obtained his

Ph.D. in electromechanical Engineering Sciences from the Vrije Universiteit Brussel in 2000. He is now a full-time professor at this university, where he leads

the MOBI – Mobility and automotive technology research centre (<http://mobi.vub.ac.be>). Currently his activities are devoted to the development of hybrid propulsion (power converters, energy storage, energy management, etc.) systems as well as to the environmental comparison of vehicles with different kind of drive trains and fuels (LCA, WTW). He is the author of more than 200 scientific publications. Prof. Van Mierlo chairs the EPE chapter “Hybrid and electric vehicles” ([www.epe-association.org](http://www.epe-association.org)); he is the secretary of the board of the Belgian section of AVERE (ASBE) ([www.asbe.be](http://www.asbe.be)) and is Vice-president of AVERE ([www.avere.org](http://www.avere.org)). He is editor in chief of the World Electric Vehicle Journal Volume 3 and co-editor of the Journal of Asian Electric Vehicles. He is an active member of EARPA – the European Automotive Research Partner Association. Furthermore he is member of Flanders Drive and of VSWB – Flemish Cooperative on hydrogen and Fuels Cells. Prof. Van Mierlo was Chairman of the International Program Committee of the International Electric, hybrid and fuel cell symposium (EVS24).



**Prof. Dr. Ir. Philippe Lataire**

Prof. Dr. Ir. Philippe Lataire received a degree in electromechanical engineering in 1975 and a degree in doctor in applied sciences in 1982 from the Vrije Universiteit Brussel (VUB, Brussels, Belgium). He is

presently full professor at the VUB in the field of power electronics, automatic control and electric drives. The prime factors of his research interest are in the field of electric drives, power electronics and control. The Department FirW – ETEC, headed by Prof. Philippe Lataire, developed research activities in the fields of sustainable mobility, computational electrochemistry, lighting, electric machines and power electronics applications.



**Prof. Dr. ir. Thierry Coosemans**

Vrije Universiteit Brussel

Email: [thierry.coosemans@vub.ac.be](mailto:thierry.coosemans@vub.ac.be)

Thierry Coosemans obtained his PhD in Engineering Sciences from Ghent University in 2006. After several years in the industry, he now became a member of the ETEC research team on transport technology at the VUB, where he works

as a scientific project manager.



**Ir. Jelle Smekens** received the B.Sc. in civil engineering from the Vrije Universiteit Brussel (VUB). He received is M.Sc in electromechanical engineering from the Université Libre de Bruxelles (ULB) and VUB in 2011. He is currently a researcher at MOBI

(Mobility and Automotive Technology Research) centre, situated at Department of Electrical Engineering at the VUB. His current research is focused on the optimization of Li-Ion battery technology through modeling techniques.



**Ir. Mohamed Abdel Monem** was born in Cairo, Egypt, in 1982. He received the B.Sc. and M.Sc. degrees in Electrical Engineering from Helwan University, Cairo, Egypt, where he is currently working toward the Ph.D. degree in the Department of Electrical Engineering and Energy Technology (ETEC), Vrije Universiteit Brussel (VUB), Belgium. His current research interests include Batteries Characterization, Systems Modeling, Parameter Estimation, Power Electronics, Renewable Energy, Control Systems and Battery Management System.



**Dr. Eng. Omar Noshin**

Vrije Universiteit Brussel

Email: [noshomar@vub.ac.be](mailto:noshomar@vub.ac.be)

Noshin Omar was born in Kurdistan, in 1982. He obtained the M.S. degree in Electronics and Mechanics from Erasmus University College Brussels. He is currently pursuing the PhD degree in the department of Electrical

Engineering and Energy Technology ETEC, at the Vrije Universiteit Brussel, Belgium. His research interests include applications of supercapacitors and batteries in BEV's, HEV's and PHEV's. He is also active in several international standardization committees such as IEC TC21/22.



**Prof. Dr. ir. Van den Bossche Peter**

Vrije Universiteit Brussel

Email: [pvdmbos@vub.ac.be](mailto:pvdmbos@vub.ac.be)

Peter Van den Bossche graduated as civil mechanical-electrotechnical engineer from the Vrije Universiteit Brussel and defended his PhD at the same institution with the thesis "The Electric Vehicle: raising the

standards". He is currently lecturer at the engineering faculties of the Vrije Universiteit Brussel, and in charge of co-ordinating research and demonstration projects for electric vehicles in collaboration with the international associations CITELEC and AVERE. His main research interest is electric vehicle standardization, in which quality he is involved in international standards committees such as IEC TC69, of which he is Secretary, and ISO TC22 SC21.