EVS29 Symposium Montréal, Québec, Canada, June 19-22, 2016

Electric Truck & Bus Grid Integration, Opportunities, Challenges & Recommendations

Jean-Baptiste Gallo¹

¹CALSTART, 48 S. Chester Ave., Pasadena, CA 91106, United States, jgallo@calstart.org

Summary

CALSTART researched and analyzed the opportunities and challenges faced by the medium and heavyduty electric truck market. E-Trucks & Buses present unique challenges and opportunities compared to light-duty EVs. In particular, current utility rate structures can discourage fleets from adopting E-Trucks & Buses. Charging has to support vehicle operation and cannot easily be shifted. In addition, demand charges can be prohibitively costly for early deployments. Lastly, charging infrastructure is a limiting factor for further vehicle adoption. Innovative utility rates and public utility commission policy changes are necessary to enable the further expansion of the E-Truck & Bus market.

Keywords: bus, policy, regulation, truck, utility

1 Overview of the E-Truck & Bus Industry & Market

Although in its early stages, the E-Truck & Bus industry (defined in this report as medium & heavy-duty plug-in electric vehicles (GVWR > 6,001 lbs.)) is dynamic and attracting the attention of fleets nationwide. E-Trucks & Buses are already moving people and goods in California and in the United States (Fig. 1).



Figure 1: Sample of E-Truck & Bus models

Like light-duty EVs, E-Trucks & Buses come with different levels of vehicle electrification (Table 1).

Electrification Technology	Example	Average Peak Demand	Battery Size
Short Range PHEV	Volvo PHEV Class 8 Drayage Truck	10 kW	10 kWh
Work Truck PHEV	Odyne Advanced Diesel PHEV Truck	3.3 kW	14/28 kWh
Long Range PHEV	Efficient Drivetrain PHEV/CNG Class 4 Truck	up to 6.6 kW	40 kWh
Short Range BEV	Proterra Fast Charge Catalyst	280 to 380 kW	53 kWh 131 kWh
Mid Range BEV	Transpower Electric Drayage Drive	70 kW	215 kWh
Long Range BEV	BYD 40-ft Electric Transit Bus	Option 1 - 80 kW Option 2 - 200 kW	324 kWh

Table 1: Different levels of truck and bus electrification

One vehicle electrification model cannot fit all the many diverse vehicle applications of the truck & bus market. For instance, some of these applications are:

- Transit bus,
- Refuse truck,
- Delivery van,
- Shuttle bus,
- Yard hostler,
- Utility and work truck.

Plug-in Hybrid Electric Vehicles (PHEV) provide zero-emission miles, operational flexibility and require charging infrastructure that is simpler and easier to install. Short range Battery Electric Vehicles (BEV) can be charged quickly to operate indefinitely without long interruptions for charging, while long range BEVs have a higher vehicle assignment flexibility as vehicles are not limited to on-route charging infrastructure. Each level of vehicle electrification has its place in the current E-Truck & Bus market and industry stakeholders should work together to facilitate the electrification of trucks and buses without picking a specific technology and stifling market innovation.

All E-Trucks & Buses will require the installation of charging infrastructure and will impact the grid. Selecting one technology over another involves trade-offs between specific vehicle operation requirements, power demand on the grid and operational savings.

1.1 Transit Agencies as Early Adopters

The publicly-funded transit bus sector offers an ideal platform for the validation and early adoption of advanced vehicle technologies [1]. That is why the E-Bus market is currently in a more advanced position than the E-Truck market. Electric drive and electric-assisted buses have already taken off in the US, making up 17% of the fleet in 2014 (up from 1% in 2005). So far most are gasoline or diesel hybrid buses [2]. Battery electric buses are still in the early commercialization phase but transit agencies are deploying a growing number of battery electric buses all across the US with a large number operating in California [3].

The large majority of battery electric buses have been manufactured by Proterra and BYD with about 110 and 102 buses sold in the US respectively [4] [5]. Other manufacturers of battery electric buses and shuttle buses include New Flyer, Complete Coach Works and Motiv Power Systems.

The number of zero-emission buses (battery electric and fuel cell hydrogen buses) is expected to double in 2016 and account for 20% of the transit bus market by 2030 [2]. In order to meet the FTA's Electric Drive Strategic Plan ambitious goal of 12,000 zero-emission buses in 2030, rapid growth in zero-emission bus sales is necessary. Recent announcements show that the industry is on the right growth path: BYD projects to sell as many as 200 electric buses in the US in 2015 [6] and Proterra is building a second plant in California after a stream of new orders [7].

1.2 E-Trucks & Buses Are Different Than Light-Duty EVs

1.2.1 Environmental Benefits

Medium and heavy-duty vehicles account for 9% of greenhouse gases (GHG) in California, and approximately 20% of fuel used [8]. In addition, they are the largest contributors of NO_x in both the San Joaquin Valley and South Coast air basins, which hold more than 50% of the population of California [9] [10]. E-Trucks & Buses provide a substantial opportunity to reduce emissions and fuel used. In addition, a truck or a bus consumes a large amount of fuel compared to a light-duty vehicle. Thus, one E-Truck or E-Bus can provide more environmental benefits than a light-duty EV.

1.2.2 Utility Load Planning

With millions of single-family homes in California, utility load planning for personal electric vehicles is complex and uncertain. On the other hand, utility load planning for E-Trucks & Buses will be simpler, at least in the early phases of the market. A limited number of truck and bus fleets will deploy electric vehicles at a limited number of bus depots, delivery centers and truck yards. At these potential deployment sites, the local distribution grid infrastructure may be significantly impacted by new E-Truck & Bus charging loads which can be much higher than for light-duty electric vehicles. E-Truck & Bus notification, where truck and bus fleets provide "information to identify new [...] charging locations to electric utilities for the purpose of ensuring grid stability, reliability of safety [11]", can be achieved by encouraging the participation of a limited number of interested truck and bus fleets that are motivated and willing to participate in order to help successful deployments of E-Trucks & Buses in California and beyond.

1.2.3 Grid Demand

With much larger batteries and higher charging rates, one E-Truck or E-Bus draws the same amount of power and consumes the same amount of energy as several light-duty electric vehicles. The electrification of one truck or bus can potentially provide more benefits to utility customers and shareholders than the electrification of one light-duty vehicle. "For utility customers, [E-Trucks & Buses] can lower rates by improving asset utilization and decreasing costs. For shareholders, they can increase returns and present a new source of growth and investment" [12]. To achieve these benefits E-Trucks & Buses, like light-duty EVs, need to contribute more revenue to utilities than the cost of serving them [12]. At this stage of the E-Truck & Bus market, more information is needed to understand what the costs to generate and deliver electricity to E-Trucks & Buses will be. An in-depth analysis is needed to better understand the implications of charging E-Trucks & Buses, such as:

- The impacts on utility distribution grids,
- The need for additional infrastructure to support them,
- Utility distribution system upgrade costs, fleet facility upgrade costs and charging infrastructure costs.

2 Barriers for Further Adoption

2.1 Current Utility Rate Structure

While the interest of truck and bus fleets in electric vehicles is diverse, the main reason why fleets are interested in E-Trucks & Buses generally revolves around operation & maintenance savings. But electric vehicles also have costs that conventionally fueled vehicles do not have. For instance, vehicle charging requires specific infrastructure and the price of electricity goes beyond a simple price per energy dispensed. Some of these costs have come as surprises to truck and bus fleets.

Following a methodology presented in [12], a simple cost benefit analysis was performed on a mediumduty electric delivery van under different cases looking at the impact of charging infrastructure, electricity and demand charges costs (Fig. 2). In this example, a medium-duty delivery van drives 12,500 miles/yr at a fuel economy of 10 MPG for a diesel vehicle and an efficiency of 1.0 kWh/mi for the EV. A conventional medium-duty delivery van costs \$65,000 and an electric one, \$150,000 and both have a lifetime of 12 years. The electric medium-duty delivery van charges at a rate of 15 kW. Maintenance savings for the EV are estimated to be \$0.05/mile. Diesel fuel prices were derived from the EIA 2015 Annual Energy Outlook for the Pacific Region. Electricity prices were assumed to increase by 1% every year. The discount rate is set at 7%. Four different cases were considered:

- Case 1: charging infrastructure cost at \$3,000, electricity cost in 2015 at \$0.12/kWh and no demand charges.
- Case 2: charging infrastructure cost at \$3,000, electricity cost in 2015 at \$0.24/kWh and no demand charges.
- Case 3: charging infrastructure cost at \$3,000, electricity cost in 2015 at \$0.24/kWh and \$14/kW.
- Case 4: charging infrastructure cost at \$10,000, electricity cost in 2015 at \$0.24/kWh and \$14/kW.

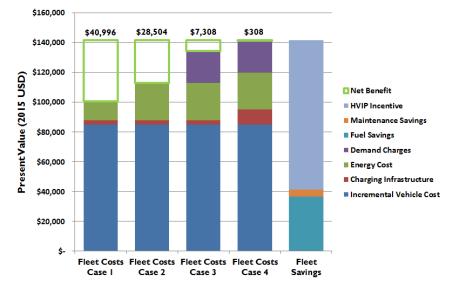


Figure 2: Medium duty delivery van costs & savings analysis

As expected, Case 1 shows the most net benefit for the fleet. As charging infrastructure, electricity costs, and demand charges increase, the net benefit for the fleet decreases to almost zero.

As we will explore in the following sections, charging infrastructure costs can be quite large, Time-Of-Use rates can make the price of electricity increase sharply during peak hours and demand charges do apply to most large commercial and industrial utility customers. For E-Trucks & Buses to be successfully adopted by fleets, changes to current public utility commission policies that take into account the need to transform the market and reduce the costs to charge and operate E-Trucks & Buses are needed. Striking the right balance between incentivizing further vehicle adoption, staying technology neutral, and respecting utility rate design principles are key goals for the industry.

2.2 Truck & Bus Fleets Need to Provide Timely & Regular Service

Truck and bus fleets work with the specific requirement to provide timely and regular service to their customers. As a result, E-Trucks & Buses will generally operate on set schedules mirroring business hours or commute hours. Time-Of-Use (TOU) pricing, where energy is more expensive when the electric demand on the grid is higher, has been effective at shifting light-duty EV charging off peak. But truck and bus fleets do not have the same flexibility to shift charging based on utility price signals. While TOU pricing can work for some delivery vehicles operating during business hours and charging at night, they can make it difficult when charging on route, during lunch breaks, between two shifts or after an early shift.

In the future, TOU pricing could be replaced by real-time pricing to accommodate higher levels of intermittent energy resources into the grid. Real-time pricing could be an opportunity for E-Trucks & Buses to benefit from low or even negative energy prices but it could also add a layer of complexity for some fleets and make it more difficult for them to adopt E-Trucks or Buses. Technical solutions, such as smart charging, energy storage or distributed generation could help mitigate the impact of TOU or real-time pricing but will add costs and may prevent further electrification of trucks and buses.

2.3 Demand Charges Can Be Prohibitively Costly for Early Deployments

In addition to charging for energy used (in kWh), electric utilities charge for power demand (in kW) on commercial and industrial customers to repay the fixed costs associated with the grid infrastructure needed during peak hours. Demand charges are considered as the appropriate way to allow recovery of utility capital costs and to give a price signal that pushes for market innovation promoting economically viable alternatives. However, they may discourage transportation electrification if loads cannot be shifted to off-peak periods [13]. Figure 3 gives an example of how demand charges impact fuel cost.




Figure 3: Impact of peak demand charges on E-Buses [13]

E-Buses have a clear advantage when no demand charges are included. With high demand charges, fuel cost increase by \$0.24/mile for one electric bus charging overnight and by \$0.90/mile for one electric bus charging on-route. As the number of electric buses using a single on-route fast charger is optimized, demand charges can be spread over more buses and electric buses charging on-route regain their operating cost advantage.

Demand charges have a greater impact on small pilot deployments. In 2012, the California Public Utilities Commission granted a three-year reprieve on electricity rates for transit agencies with E-Buses, which allowed Foothill Transit to test three Proterra buses in real world operations that may not have been economically feasible with demand charges. Successful testing enabled by this waiver convinced Foothill Transit to purchase more buses for a current total of 17.

However, longer term solutions are needed as the three-year reprieve only delays the application of demand charges and shift costs to non-participating customers. Vehicle deployments should be optimized to maximize the load factor, the amount of kWh used per each kW of demand. This can be achieved for E-Buses charging on-route by deploying the optimum number of buses using a single fast charger in order to maximize fast charger usage and spread demand charges over more E-Buses.

2.4 Charging Infrastructure

Several truck and bus fleets that we have interviewed indicated that E-Trucks & Buses could be deployed on a much larger scale than today. Although the availability of commercial product offerings is currently the most important issue preventing further adoption, the cost to provide electricity for charging has been underestimated by many fleets. Below are observations from some of the fleets interviewed for this paper:

- Vehicles generally need to be charged where they are parked (near a conveyor belt or on a yard) which may not be close to the existing utility service drop.
- Bringing power to the vehicle parking location may require excavation, conduits, cabling and repaving.
- Every bus depot, delivery center or truck yard is different. In addition, the age of the electric infrastructure, the electric capacity available for expansion and the charging infrastructure costs are hard to estimate.

- The duration to complete an infrastructure upgrade can vary from several days to up to one year and depends on many parameters. While fleets wait for upgrades, vehicles cannot be operated.
- Utility rates are difficult to understand and it is difficult to analyze charging data and find ways to minimize costs without utility assistance.
- Not all electric utilities are actively engaged and provide helpful guidance to truck and bus fleets deploying electric vehicles.
- Charging systems are not all standardized, raising concerns about operability of future vehicle models using existing infrastructure.

Some fleets have considered all-electric facilities only to realize that the infrastructure costs to fully electrify a 100 to 200 - vehicle facility would be prohibitive. Table 2 lists cost estimates for charging infrastructure from actual fleets and OEMs.

Fleet cost estimates	EVSE	EVSE Installation	
per one charger installation	EVSE	Low	High
16.5kW (220V / 75A)	\$1,000 - \$3,000	\$17,000	\$32,000
70kW (208VAC 3Ø / 200A)	\$5,000 - \$10,000	\$20,000	\$75,000
450kW (480VAC 3Ø / 640A)	\$350,000	\$150,000	\$200,000

Table 2: E-Truck & Bus charging infrastructure cost estimates

Infrastructure costs are high and vary widely. In addition, the faster a vehicle needs to be charged, the more expensive the charging infrastructure will be. These costs do not include upgrades in the distribution system that may be needed if the rated capacity of the installed electric equipment is exceeded. One fleet who deployed 20 E-Trucks at a facility in Southern California had to upgrade a transformer on the customer side of the meter to accommodate the added load to the facility. In this particular case, the \$470,000 transformer price tag had a significant impact on the total project cost.

Faced with these high infrastructure costs, several fleets have taken a cautious approach by limiting the number of vehicles deployed at a single location. Instead of having a set number of vehicles to deploy at a single location, fleets prefer to only deploy the maximum number of vehicles without exceeding the rated capacity of the installed electric equipment which would trigger major utility upgrades.

Public utility commission policies should be changed to reduce the cost of installing charging infrastructure. Specifically, electric utilities should be allowed to rate base some or all of the costs to bring the necessary power up to and including the "make-ready" stub. In addition, electric utilities should be allowed to play a role, along with other market players in developing and supporting charging stations to allow truck & bus fleets, E-Truck & Bus manufacturers and federal and/or state agencies to focus their resources on purchasing and deploying vehicles.

3 Need for Innovative Public Utility Commission Policy

The current utility rate structure promotes the efficient utilization of grid resources and allows for recovery of utility capital costs but may discourage the electrification of medium and heavy-duty vehicles. Innovative EV rates should be adopted to enable the further expansion of the E-Truck & Bus market. Specifically, electric utility rates should:

• Acknowledge the unique needs of the E-Truck & Bus market.

Truck & bus fleets do not have the same flexibility to shift charging as light-duty EVs so E-Trucks & Buses need to be looked as a distinct market.

• *Recognize the environmental and grid benefits of E-Trucks & Buses.*

LADWP and SCE have adopted specific rates for cold ironing to provide cleaner hoteling options to merchant ships and long-haul trucks. Georgia Power provides a very competitive rate for E-Bus operation (Table 3).

Utility	SCE			Georgia Power
Rate Schedule	TOU-EV-3	TOU-EV-4	TOU-8 option A	ET-15
Maximum Demand	<20kW	>20kW <500kW	>500kW	N/A
EV Submetering	Required	Required	N/A	Yes
Energy Charge	Max. \$0.36/kWh Min. \$0.06/kWh	Max. \$0.36/kWh Min. \$0.06/kWh	Max. \$0.36/kWh Min. \$0.06/kWh	Max. \$0.36/kWh Min. \$0.06/kWh
Demand Charge	A - \$0.00/kW B - \$7.23/kW	A - \$0.00/kW B - \$7.23/kW	A - \$0.00/kW B - \$7.23/kW	A - \$0.00/kW B - \$7.23/kW
Notes	No EV demand charges for Option B if EV account demand does not exceed General Service account demand of associated facility.	No EV demand charges if EV account demand does not exceed General Service account demand of associated facility.	For cold ironing pollution mitigation programs (vessels hoteling at the Port of Long Beach and the Port of Hueneme, and long-haul trucks hotelling at truck stops).	For the operation of electric transportation at 3Ø, 60 Hz and 19.8kV or higher.

Table 3: Examples of utility rates designed for E-Trucks & Buses [14] [15]

• Separately submeter E-Truck & Bus charging where it makes sense.

In their recent applications to the CPUC, PG&E and SCE require separate metering of EV energy consumption.

• Be compatible with truck & bus fleet operation.

SCE adopted several utility rates that accommodate EV charging at commercial facilities and stay true to principles of rate design. SCE's TOU-EV-3 & 4 rates waive demand charges for EV charging if the EV demand does not exceed the demand of the associated facility (Table 3).

• Remain technology & business model neutral.

Electrifying different truck & bus applications will require utility rates that do not favor one electrification technology over another. For instance, fleets will need both on-route opportunity and overnight charging. Considering a pricing option that charges more per kWh and less per kW could put both technologies on equal footing and allow for the electrification of more trucks & buses.

4 Potential Technical Solutions

Like light-duty EVs, the grid impacts caused by charging E-Trucks & Buses represent a key issue. In section 1.2.2, we saw that E-Trucks & Buses will be concentrated in urban areas, at a limited number of bus depots, delivery centers and truck yards. If E-Truck & Bus charging is not managed properly at these locations, the local distribution grid infrastructure could be significantly impacted and would require expansive upgrades. To remedy this issue, several fleets are actively exploring technical solutions such as:

- Smart charging,
- Range extenders,
- Energy storage, and
- On-site electricity generation.

Demand response is not believed to be a viable solution in its current form, as customers have to make loads available for curtailment when the utility requests. This may not be feasible for fleets who need to provide timely and regular service and may not have vehicles available for curtailment.

4.1 Smart Charging

Smart charging systems can enable better grid integration by balancing EV charging and building load to charge the greatest number of vehicles at the lowest cost possible and increase certainty of service for the fleets. GE Global Research and Columbia University developed a smart charging solution for FedEx

Express in New York City. The system "regulate[s] the charging rate of multiple EVSEs to facilitate costoptimal charging subject to past and predicted building load, vehicle energy requirements, and current conditions" [16]. Figure 4 shows how for a fleet of 100 E-Trucks, the system can decrease peak facility demand by over 500 kW and save approximately \$11,500 per month in demand charges compared to a fleet without the smart charging system. For a fleet of 200 E-Trucks, peak facility demand could be reduced by over 1,000 kW and demand charges savings could expand to about \$23,000 per month [16]. Control systems for smart charging are in the development phase and one interviewed fleet expects costs between \$5,000 and \$7,000 per facility.




Figure 4: Incremental peak demand and associated cost incurred for demand based on EV fleet size [16]

In addition to reducing demand charges, smart charging E-Trucks & Buses can also minimize the impact of TOU and reduce charging infrastructure costs. But to achieve the latter benefit, smart charging strategies need to be taken into account when calculating the load added by E-Truck & Bus charging. One fleet detailed a particular case where utility code mandated that a facility electric infrastructure be upgraded to accommodate all the E-Trucks charging at the same time at the maximum charging rate even if charging could easily be managed to reduce the peak facility load.

4.2 Range Extenders, Energy Storage & On-Site Generation

Range extenders, energy storage and on-site generation have been identified as potential technical options that could mitigate the grid impacts of charging and are actively researched by several of the fleets that we interviewed.

Integrated on E-Trucks & Buses, range extenders could decrease the amount of electricity needed between two charging events and the overall required charging power. They could also decrease markedly charging infrastructure issues. For some fleets, H_2 refueling infrastructure is seen as an easier and ultimately cheaper option. Fuel cell range extenders may represent a smoother transition from current vehicle operating models and could circumvent the inconvenient need to have to charge at the location where the truck or bus is parked.

Energy storage systems (batteries, ultracapacitors, or flywheels) can be used as buffers between the grid and EV chargers to smooth out peak loads. Table 4 describes the ABB TOSA bus charging system in demonstration in Switzerland.

	Grid to Charger	Charger to Bus
Maximum charging power	40 kW	400 kW
Charging duration	2.5 minutes	15 seconds
Energy transferred	1.7 kWh	1.7 kWh

Table 4: Different levels of truck and bus electrification [13]

The use of ultracapacitors decreases the maximum power demand on the grid from 400 kW to 40 kW while maintaining the benefits of on-route fast charging. In addition, lower charging power allows for easier siting of the charging infrastructure as it may not require complex and expensive upgrades to the electric infrastructure [13].

Some fleets, early adopters of hybrid, plug-in hybrid, and electric trucks & buses will start retiring vehicles in the next 3 to 5 years. These fleets are eager to reuse the batteries from these vehicles for second-life applications to facilitate the deployment of more E-Trucks & Buses. Lastly, coupling on-site electricity generation (solar PV, fuel cell or microturbine) with energy storage is another interesting option for fleets to mitigate charging infrastructure costs, reduce demand and TOU charges, and provide certainty of service during grid outages.

5 E-Trucks & Buses as Grid Resources

With very ambitious targets for renewable energy integration, the California grid will be stressed in new ways [17]. Spring and fall days in particular, could soon see overgeneration risks when solar generation peaks and steep ramp needs when it declines (Figure 5).

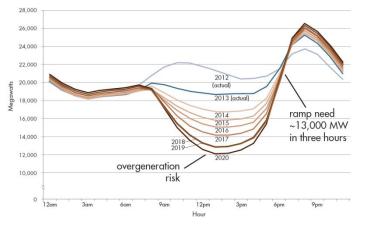


Figure 5: The California ISO "duck curve" (March 31) [18]

Flexible resources will be needed to reliably manage these new challenges [18]. In addition to transporting goods and people, E-Trucks & Buses could provide additional grid benefits:

- E-Trucks & Buses charging on route, during lunch breaks, between two shifts or after an early shift could represent a large source of diurnal energy storage available to reduce overgeneration risks.
- Smart charging could slow down or even suspend charging during periods of high ramp needs while still guaranteeing vehicle availability.
- Energy storage systems could enable more E-Trucks & Buses to charge during periods of overgeneration, discharge during periods of high ramp needs and take advantage of real-time pricing.

For fleets to make E-Trucks & Buses serve as true grid resources, key players will be needed to aggregate loads, automate charging and adopt consistent standards and communication protocols [17].

Electricity currently accounts for a small share of the California Low Carbon Fuel Standard (LCFS) credits. However, the California LCFS represents a viable opportunity for truck & bus fleets to decrease the costs to operate E-Trucks & Buses. With current LCFS carbon intensities, a 40-ft battery electric bus could generate about 40 LCFS credits per year for an equivalent value ranging from \$0.07 and \$0.15/kWh at current credit prices. It may be difficult for truck & bus fleets to become the credit generator and other market players may be better suited to secure these LCFS credits. These credits could then be given back to the fleets either as a rebate or as an on-bill credit.

6 What About Vehicle-To-Grid?

Two pilot projects (one at the U.S. Army base of Fort Carson, CO and one with Frito-Lay in Texas) have demonstrated the technical feasibility of using E-Trucks & Buses as power sources for grid balancing services such as frequency regulation [19] [20]. But several of the fleets that we interviewed, while interested in V2G, did not see it as a solution that they could benefit from in the short term. Some of their observations are listed below:

• While a fleet of E-Trucks & Buses, with vehicles equipped with larger batteries and charging power compared to light-duty EVs, can more easily satisfy the minimum power requirements for

participation in the ancillary market, fleets did not think they could provide enough grid services to be of interest to market regulators or aggregators.

- E-Truck & Bus charging is set on rigid operating schedules while ancillary service prices vary throughout the day depending on grid and weather conditions.
- While a recent project validated the technical feasibility of V2G for commercial vehicles, it also concluded that "economics in current market structure [are] not viable for participation" [20].
- Fleets will not adopt a technology (such as V2G) that will prevent vehicle operation by decreasing range or delaying availability.
- Fleets are not opposed to third party ownership of charging infrastructure but cannot let a third party influence their operation.
- No key players in the ancillary / utility / facility market currently exist and fleets are seeing V2G more as a long term (5 to 10 years) technology, preferring simpler approaches such as Vehicle-to-Building.

7 Recommendations & Next Steps

There is currently a lot of interest in the E-Truck & Bus market. While E-Trucks have been deployed for several years, significant activity is now focused on all-electric buses. In its early market stages, technologies and solutions are still being researched, developed and tested. The current picture of the market is bound to change as technology matures but the decisions taken now by regulators, utilities, fleets and vehicle manufacturers will shape the future of E-Trucks & Buses and influence their success. As demonstrated in this paper, E-Trucks & Buses present unique challenges and opportunities compared to light-duty electric vehicles. In addition, E-Truck & Bus loads are different from other facility loads and light-duty EVs. The success of electric vehicles in the commercial medium and heavy-duty vehicle market will require different approaches. Below are several recommendations derived from this paper:

• Expand & enhance industry stakeholder forums to better tackle industry issues

The E-Truck & Bus community, while still small, is composed of motivated stakeholders committed to the progress of the industry. Expanding and enhancing the activities of industry stakeholder forums such as CALSTART's E-Truck Task Force would promote industry stakeholder engagement, increase information sharing between utilities, fleets, and manufacturers, and better tackle some of the industry issues identified in this report.

• Commission a comprehensive E-Truck & Bus load study

There is currently a lack of information on E-Truck & Bus charging infrastructure costs and charging patterns. A comprehensive E-Truck & Bus load study would monitor the actual distribution system upgrade costs and develop charging load profiles for different medium and heavy-duty vehicle vocations. Such a study could also look at answering questions fleets have: What is the available capacity (kW) and utilization (%) of the transformer that will support the E-Truck & Bus deployment? Is a single (larger) new substation or substation upgrade or several (smaller) feeder upgrades more cost effective? How would a "E-Truck or Bus ready facility" look like and how much would it cost to create a purpose-built facility that can easily accommodate vehicle deployments in the future?

• Create dedicated E-Truck & Bus program manager positions to support fleets

Electric utilities should create specific E-Truck & Bus program manager positions to guide fleets make better decisions when procuring E-Trucks & Buses and accelerate the electrification of medium & heavyduty vehicles in a way that is cost effective for truck & bus fleets, "reduces rates for other customers, provides value to shareholders and minimizes criteria pollutant and GHG emissions" [12].

• Secure existing low carbon fuel standard credits to reduce E-Truck & Bus operating costs

A process should be developed to secure low carbon fuel standard credits from E-Trucks & Buses and make it simple for truck & bus fleets to be given back these credits either as a rebate or as an on-bill credit.

• Continue to support the electrification of trucks & buses through grants, incentives and tax credits

E-Trucks & Buses are already in use today in several fleets across the nation, and we are seeing increases in sales and in interest, especially among transit agencies. Technology is improving and costs are coming down. However, grants, incentives and tax credits are still needed to reduce the costs to purchase and charge E-Trucks & Buses at this early stage of the market. In particular, more cost effective larger vehicle deployments should be targeted.

• Fund demonstration projects focusing on advancing technologies that will enable further electrification

Federal and state funding agencies should fund high quality, competitive projects that will accelerate the commercialization of technologies that maximize load factors (the amount of kWh used per each kW of demand) and can make E-Trucks & Buses true grid resources. Such projects should include smart charging technology, range extenders, on-site generation and energy storage systems, specifically those looking at second-life applications of E-Truck & Bus batteries.

• Adapt utility rate structure to accelerate the cost effective electrification of trucks & buses

The current utility rate structure promotes the efficient utilization of grid resources and allows for recovery of utility capital costs but may discourage the electrification of medium and heavy-duty vehicles. Innovative EV rates should be adopted to enable the further expansion of the E-Truck & Bus market. Specifically, electric utility rates should:

- Acknowledge the unique needs of the E-Truck & Bus market.
- Recognize the environmental and grid benefits of E-Trucks & Buses.
- Separately submeter E-Truck & Bus charging where it makes sense.
- Be compatible with truck & bus fleet operation.
- Remain technology and business model neutral.
- Change current public utility commission policy to mitigate the costs of E-Truck & Bus charging infrastructure

Electric utilities should be allowed to rate base some or all of the costs to bring the necessary power up to and including the "make-ready" stub. In addition, electric utilities should be allowed to play a role, along with other market players, in developing and supporting charging stations to allow truck & bus fleets, E-Truck & Bus manufacturers and federal and/or state agencies to focus their resources on purchasing and deploying vehicles.

Acknowledgments

CALSTART would like to express its appreciation to the Energy Foundation for providing funding for this project. In addition, CALSTART would like to thank the industry stakeholders who shared their knowledge, experience, and learnings, provided valuable input and feedback, corrected our errors, and participated in an extensive review process.

References

- [1] U.S. Department of Transportation. Federal Transit Administration. Electric Drive Strategic Plan. Draft Copy. September 2008.
- [2] National Geographic. Tesla for the Masses: Electric, Fuel Cell Buses Take Off. March 12, 2015. <u>http://news.nationalgeographic.com/energy/2015/03/150312-tesla-for-the-masses-electric-buses-take-off/</u>. Accessed on 05/06/2015.
- [3] California Environmental Protection Agency, Air Resources Board. DRAFT, Heavy-Duty Technology and Fuels Assessment: Overview. April 2015. <u>http://www.arb.ca.gov/msprog/tech/techreport/ta_overview_v_4_3_2015_final_pdf.pdf</u>. Accessed on 04/30/2015.
- [4] Evelyne McCleland (Proterra), personal communication, July 2015.
- [5] Andrew Swanton (BYD), personal communication, July 2015.
- [6] Bloomberg Business. BYD Projects More U.S. Electric-Bus Orders. April 27, 2015. <u>http://www.bloomberg.com/news/articles/2015-04-27/china-s-byd-wins-its-biggest-electric-bus-order-in-u-s-</u>. Accessed on 05/06/2015.
- [7] Wall Street Journal. Electric Bus Maker Proterra Building Second Plant in California. April 10, 2015. <u>http://www.wsj.com/articles/electric-bus-maker-proterra-building-second-plant-in-california-1428678858</u>. Accessed on 05/06/2015.
- [8] CalHEAT Truck Research Center. CalHEAT Research and Market Transformation Roadmap for Mediumand Heavy-Duty Trucks. February 2013. <u>http://www.calstart.org/Libraries/CalHEAT_2013_Documents_Presentations/CalHEAT_Roadmap_Final_Dr</u> <u>aft_Publication_Rev_6.sflb.ashx</u>. Accessed on 05/08/2015.

- [9] San Joaquin Valley Air Pollution Control District. About the district. http://www.valleyair.org/General_info/aboutdist.htm#Making%20Progress. Accessed on 05/08/2015.
- [10] South Coast Air Quality Management District. Board Meeting. Agenda No. 4. February 6, 2015. <u>http://www.aqmd.gov/docs/default-source/Agendas/Governing-Board/2015/2015-feb6-004.pdf?sfvrsn=2</u>. Accessed on 05/08/2015.
- [11] Public Utilities Commission of the State of California. Rulemaking 09-08-009. Joint IOU Assessment Report for PEV Notification. December 23, 2011. http://docs.cpuc.ca.gov/word_pdf/FINAL_DECISION/106042.pdf. Accessed on 04/30/2015.
- [12] Energy and Environmental Economics. Engaging Utilities and Regulators on Transportation Electrification. https://ethree.com/documents/E3-NRDC_EVs_Paper_Final_20150129.pdf. Accessed on 05/12/2015.
- [13] CALSTART. Peak Demand Charges and Electric Transit Buses, White Paper. <u>http://www.calstart.org/Libraries/Publications/Peak Demand Charges and Electric Transit Buses White</u> <u>Paper.sflb.ashx</u>. Accessed on 05/12/2015.
- [14] Southern California Edison, General Service Industrial Rate Schedule. <u>https://www.sce.com/wps/portal/home/regulatory/tariff-books/rates-pricing-choices/business-rates</u>. Accessed on 08/21/2015.
- [15] Georgia Power. Business Tariffs. <u>http://www.georgiapower.com/pricing/business/schedules.cshtml</u>. Accessed on 08/21/2015.
- [16] Shah, Jigar, Mads Nielsen, Alastair Reid, Conner Shane, Kirk Mathews, David Doerge, Richard Piel et al. "Cost-optimal, robust charging of electrically-fueled commercial vehicle fleets via machine learning." In Systems Conference (SysCon), 2014 8th Annual IEEE, pp. 65-71. IEEE, 2014.
- [17] Energy and Environmental Economics. E3 Higher RPS Study. Briefing for PEV Collaborative. March 11, 2014.
 <u>http://www.pevcollaborative.org/sites/all/themes/pev/files/Ryan_PEVC%20Presentation%20Nancy%20Rya</u>n%20E3.pdf. Accessed on 08/27/2015.
- [18] California ISO. Fast Facts. What the duck curve tells us about managing a green grid. http://www.caiso.com/documents/flexibleresourceshelprenewables_fastfacts.pdf. Accessed on 06/22/2015.
- [19] EV World. U.S. Army Testing Bi-Directional Charging System. http://evworld.com/news.cfm?newsid=31161. Accessed on 06/22/2015.
- [20] Southwest Research Institute. Frito-Lay Electric Vehicle Fleet. Fast Responding Regulation Service (FRRS). <u>http://www.ercot.com/content/wcm/key_documents_lists/53418/5. FRRS_Frito_Lay_02192015_revised_.pdf</u>. Accessed on 06/22/2015.

Authors



Jean-Baptiste Gallo is currently working for CALSTART as a Senior Project Engineer where he manages transportation electrification projects. Prior to joining CALSTART, Jean-Baptiste worked for PSA Peugeot – Citroën in France, where he developed idle speed control systems for passenger vehicles. He received his Master's Degree in Mechanical Engineering from the Ecole Polytechnique de l'Université d'Orléans in Orléans, France and a Certificate in International Environmental Policy from the Monterey Institute of International Studies in Monterey, California.