sustainability

MDPI

Review

Beyond Sustainability: The Role of Regenerative Design in Optimizing Indoor Environmental Quality

Sanjay Kumar [1,*], Kimihiro Sakagami [2] and Heow Pueh Lee [3,*]

[1] Independent Researcher, Omaha, NE 68105, USA
[2] Environmental Acoustics Laboratory, Department of Architecture, Graduate School of Engineering, Kobe University, Kobe 657-8501, Japan; saka@kobe-u.ac.jp
[3] Department of Mechanical Engineering, National University of Singapore, 9 Engineering Drive 1, Singapore 117575, Singapore
* Correspondence: sanjay21505@gmail.com (S.K.); mpeleehp@nus.edu.sg (H.P.L.)

Abstract: The pursuit of sustainable design has made strides in improving building practices, yet traditional approaches often fall short in addressing the holistic needs of both the environment and human well-being. This research delves into the emerging field of regenerative design, which extends beyond sustainability by seeking to restore and enhance ecological and human systems. By integrating regenerative principles into indoor environments, this study evaluates their impact on indoor environmental quality (IEQ). Through a comprehensive literature review, the research demonstrates that regenerative design can significantly enhance air quality, thermal comfort, lighting, and acoustics, ultimately creating healthier and more productive indoor spaces. This paper also discusses potential challenges and outlines future research directions to further advance the application of regenerative design in building practices.

Keywords: regenerative design; indoor environmental quality; sustainable design; building performance; environmental impact

check for updates

Academic Editor: Giacomo Salvadori

Received: 6 February 2025
Revised: 27 February 2025
Accepted: 6 March 2025
Published: 7 March 2025

Citation: Kumar, S.; Sakagami, K.; Lee, H.P. Beyond Sustainability: The Role of Regenerative Design in Optimizing Indoor Environmental Quality. *Sustainability* **2025**, *17*, 2342. https://doi.org/10.3390/su17062342

Copyright: © 2025 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

1. Introduction

As global awareness of environmental degradation and public health challenges intensifies, traditional sustainability efforts have predominantly centered on mitigating negative impacts through strategies such as energy efficiency, resource conservation, and emissions reduction. While these approaches are vital, they often treat the symptoms of deeper ecological and societal issues rather than addressing their root causes. This limited perspective highlights the urgent need for a more comprehensive framework—one that not only minimizes harm but also actively restores and revitalizes both natural ecosystems and human communities.

Regenerative design emerges as a transformative paradigm, extending beyond the boundaries of conventional sustainability to foster resilience and vitality within the built environment. Unlike traditional green or sustainable design, which primarily aims to reduce environmental footprints while prioritizing functionality, aesthetics, and cost, regenerative design seeks to enhance and renew ecological and social systems [1]. By integrating ecological principles, systems thinking, and a holistic understanding of human–environment relationships, it creates adaptive, self-sustaining designs that contribute positively to their surroundings [2–5]. This approach also contrasts with restorative design, which focuses on repairing damaged ecosystems, by emphasizing continuous improvement and renewal—leaving the world better than it was found [6].

Figure 1 illustrates this evolution from conventional design to a regenerative paradigm, underscoring the shift towards proactive ecological and societal enhancement.

The applications of regenerative design span diverse fields, including architecture, agriculture, urban planning, and product design. In architecture, buildings are designed to harmonize with their natural contexts, incorporating elements such as green walls, rainwater harvesting, renewable energy systems, and wildlife habitats. In agriculture, regenerative practices revitalize soil health and biodiversity. Urban planning leverages this approach to develop regenerative cities featuring green spaces, walkable neighborhoods, and sustainable transportation networks. In product design, emphasis on durability, recyclability, and compostability minimizes waste and resource use. Within the built environment, regenerative design deepens the interplay between structures, landscapes, and communities, enhancing biodiversity, water management, and carbon sequestration while promoting long-term resilience through adaptable, enduring buildings [7–11]. Beyond environmental benefits, it elevates social well-being by creating healthier living spaces and delivers economic advantages through reduced maintenance costs, increased property values, and improved occupant satisfaction.

Several review papers have been published on the regenerative design approach for indoor environmental quality. These studies have addressed various aspects, such as frameworks supporting regenerative indoor design [12–17], the integration of ecological principles into regenerative design, and passive design comfort models for regenerative sustainability, among others. However, the information remains broad and dispersed. This paper aims to consolidate these ideas by exploring the core concepts of regenerative design and examining their role in optimizing indoor environmental quality (IEQ) within built environments. Recognizing the significant impact of indoor spaces on occupant well-being, productivity, and overall life quality, the integration of regenerative approaches into building design emerges as both a timely and critical endeavor. Through a comprehensive literature review, this paper focused on studies exploring the transition from sustainability principles to regenerative design frameworks, with a specific emphasis on improving IEQ through innovative architectural and design interventions. Central themes include sustainability benchmarks, regenerative design tenets, IEQ components (such as air quality, thermal comfort, lighting, and acoustics), and cutting-edge design solutions (including biophilic design, adaptive reuse, and smart technologies). Additionally, the paper tackles the challenges associated with adopting regenerative design and suggests pathways for future research to promote its broader application in construction practices. By exploring these dimensions, this manuscript aims to contribute to the evolving discourse on designing built environments that go beyond mere sustainability to actively rejuvenate their surroundings.

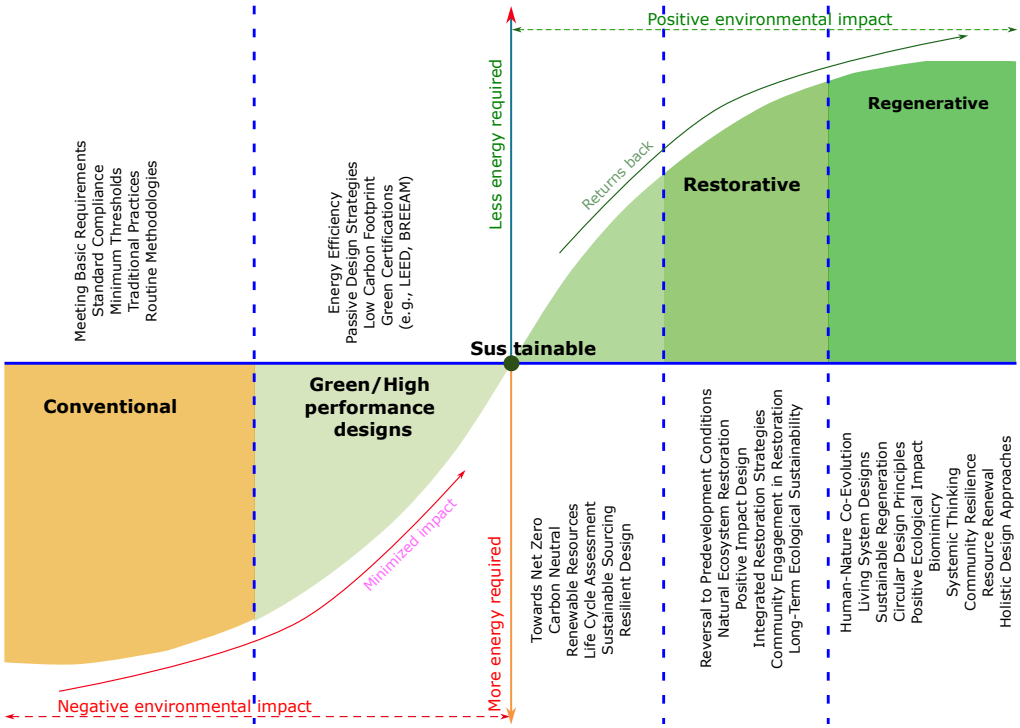


Figure 1. Paradigm shift from conventional design to regenerative design approach. (Inspired from the work of Bill Read [2] and Craft et al. [18].)

2. Research Methodology

This study examined the state of the art of the published literature on the shift from sustainability principles to regenerative design frameworks, with a particular focus on enhancing indoor environmental quality (IEQ) through innovative architectural and design interventions. To gather the relevant literature for this study, a systematic search was conducted across several academic databases, including Scopus, Web of Science, PubMed, and Google Scholar. This search targeted peer-reviewed articles, conference proceedings, and books that aligned with the research focus. Beyond these academic sources, additional materials such as industry reports, white papers, and design case studies were obtained from well-regarded organizations like the World Green Building Council and the International Living Future Institute. The search utilized a combination of keywords—"sustainability", "regenerative design", "indoor environment quality", "innovative design", "biophilic design", "smart buildings", and "environmental performance"—refined through Boolean operators (AND, OR, NOT) to ensure precision and relevance in the results.

The review prioritized studies published in English, primarily spanning from 2000 to 2025, to trace the development of sustainability and regenerative design concepts over time. It included articles that specifically addressed indoor environmental quality (IEQ) in residential, commercial, or institutional buildings, with a focus on research showcasing innovative design solutions that demonstrated measurable effects on IEQ or sustainability outcomes. However, the scope was intentionally limited to the literature pertinent to built environments, excluding topics like ecological regeneration outside architectural contexts to maintain a clear and cohesive focus for the review.

The selection process began with an initial screening of titles and abstracts to determine relevance based on predefined inclusion criteria, resulting in a preliminary collection of studies. Subsequent full-text reviews assessed the depth of analysis, methodological rigor, and alignment with the study's objectives. This process culminated in a final selection of approximately 150–170 sources, carefully balanced to include theoretical frameworks,

empirical research, and practical design applications. Each selected study was evaluated for quality, considering factors such as clarity of purpose, methodological strength, validity of findings, and relevance to the research goals. The review process remained dynamic, with periodic adjustments to search terms and criteria as new themes emerged, such as the influence of circular economy principles in regenerative design. Potential biases—such as an overrepresentation of studies from developed regions or a scarcity of long-term data on regenerative design outcomes—were acknowledged. To address these, efforts were made to incorporate diverse geographic perspectives and interdisciplinary sources wherever feasible, enhancing the review's comprehensiveness and inclusivity.

3. Principal Elements of Regenerative Design

Regenerative design has evolved significantly from earlier environmental and sustainability movements. It originated in the late 20th century when architects and planners recognized the limitations of traditional "sustainable" design. Its roots trace back to the ecological and systems thinking movements of the 1960s and 1970s, which emphasized the interconnectedness of human and natural systems. Initially, sustainable design focused on minimizing negative impacts through energy efficiency and resource conservation. Frameworks such as Leadership in Energy and Environmental Design (LEED; launched in 1998) in the USA, the WELL Building Standard-V1 (introduced between 2013 and 2014) in the USA, International Living Future Institute (ILFI) in the USA, REthinking Sustainability TOwards a Regenerative Economy (RESTORE) in the EU, Building Research Establishment Environmental Assessment Methodology (BREEAM) in the UK, and Comprehensive Assessment System for Built Environment Efficiency (CASBEE) in Japan establish standards for environmental performance [19]. However, these frameworks typically prioritize minimizing negative impact rather than promoting the restoration or enhancement of ecological systems.

The concept of regenerative design took shape in the 2000s as a more advanced approach. Pioneers like William McDonough and Michael Braungart, with their Cradle to Cradle design philosophy, advocated shifting from sustainability to regeneration [20,21]. They proposed going beyond reducing negative impacts to creating positive effects, such as restoring ecosystems and promoting well-being. Figure 2 illustrates regenerative design's core principles, emphasizing the interconnection between human activities and ecological systems. It highlights the importance of aligning human activities with natural processes, with key elements including integration with natural systems, closed-loop systems, regenerative feedback loops, human well-being, systemic thinking, and regenerative metrics and evaluation.

Integration with Natural Systems: Regenerative design aims to align human-made systems with natural processes, acknowledging the interdependence between human activities and ecological systems [14,22–24]. This approach focuses on creating buildings and spaces that harmonize with their natural surroundings, enhancing or mimicking natural processes such as water filtration, air purification, and climate regulation. It emphasizes designing with a deep respect for and utilization of local ecological characteristics, including climate, geology, and biodiversity. Additionally, regenerative design involves creating environments that support or restore local flora and fauna, incorporating green roofs, living walls, and diverse landscapes to promote biodiversity. For instance, a regenerative building might include rain gardens and permeable pavements to naturally manage stormwater, provide habitats for local species, and minimize runoff pollution [25,26]. This holistic approach fosters a symbiotic relationship between human structures and the environment, contributing to ecological health and sustainability.

Closed-Loop Systems: Closed-loop systems, also known as circular systems, are designed to create regenerative processes where the byproducts of one stage become valuable resources for another, starkly contrasting with the traditional linear model of "take-make-dispose" [27–29]. This approach emphasizes the continuous circulation of materials and energy, aiming to minimize waste and reduce resource depletion. In these systems, materials are repeatedly repaired, reconditioned, reused, recycled, or composted rather than discarded, which helps cut down on waste and decreases the need for new resources [30,31]. Additionally, energy systems are crafted to be self-sustaining by integrating renewable sources, thus reducing reliance on finite, non-renewable energy. A key aspect of closed-loop systems is the differentiation between biological and technical loops: biological nutrients can safely re-enter the environment, while technical nutrients are designed to be perpetually cycled within the industrial framework. For example, a building that follows closed-loop principles might feature materials easily disassembled for reuse or recycling at the end of its life cycle and incorporate an energy system with solar panels and storage solutions to achieve a net-zero energy footprint. This comprehensive approach enhances sustainability by ensuring that materials and energy flow through the system in a continuous, efficient cycle.

Regenerative Feedback Loops: Regenerative feedback loops involve monitoring and adjusting systems based on their performance and environmental impact, emphasizing the importance of adaptability and responsiveness [32]. This principle is centered on using real-time data and sensors to track building performance, allowing for adjustments that optimize both efficiency and occupant comfort. Through adaptive design, systems such as HVAC and lighting are continuously refined based on feedback, adjusting to factors like occupancy levels and environmental conditions. This approach fosters a culture of continuous improvement, learning from successes and failures to enhance design practices. For instance, a smart building might employ occupancy sensors to dynamically adjust lighting and climate controls, maximizing energy efficiency and occupant comfort while remaining flexible to changing conditions. This iterative process helps ensure systems remain effective and responsive, reflecting a commitment to ongoing enhancement and environmental stewardship.

Human Well-Being and Connection: Regenerative design emphasizes the health and well-being of occupants by crafting environments that support physical, mental, and emotional health, recognizing the deep connection between human well-being and environmental quality [33,34]. This principle involves designing spaces focusing on optimal indoor air quality, thermal comfort, natural lighting, and acoustic quality to enhance overall occupant health. It also incorporates biophilic design elements, such as integrating natural features and fostering connections to nature within indoor spaces, which helps reduce stress and improve mood. Additionally, regenerative design encourages community engagement by involving users in the design process and creating environments that promote social interaction and community cohesion. For example, offices that feature abundant natural light, access to outdoor views, and biophilic elements like indoor plants can significantly boost employee productivity and satisfaction, highlighting the positive impact of thoughtful design on occupant well-being.

Systemic Thinking: Systemic thinking in regenerative design entails recognizing and addressing the interconnections among various elements within a system, emphasizing that projects should be viewed as integral parts of larger ecological, social, and economic frameworks [35–37]. This approach involves holistic design, where the effects of design choices are evaluated across multiple dimensions, including social, environmental, and economic factors. It also requires interdisciplinary collaboration, bringing together experts from diverse fields—such as architects, ecologists, and engineers—to tackle complex challenges

and develop integrated solutions. Furthermore, systemic thinking incorporates a long-term perspective, considering the enduring impacts of design decisions on the environment and future generations. For instance, a community development project might combine energy-efficient buildings with local food production systems and communal spaces, creating a resilient and self-sustaining ecosystem that supports current and future needs.

Regenerative Metrics and Evaluation: These measure the good effects of design on both human and environmental systems. They shift the focus from traditional sustainability metrics to measuring regenerative outcomes [13,38]. This principle involves measuring contributions to ecosystem restoration, social equity, and community well-being rather than merely quantifying reductions in negative impacts. It also emphasizes the development of dynamic metrics that reflect the evolving nature of regenerative processes and their long-term effects [39]. Additionally, regenerative metrics incorporate feedback from various stakeholders to capture the broader impact of design interventions. For example, rather than only tracking energy savings, regenerative metrics might evaluate how a building enhances local biodiversity, improves community health, and fosters social well-being, thus providing a more comprehensive view of a project's positive contributions.

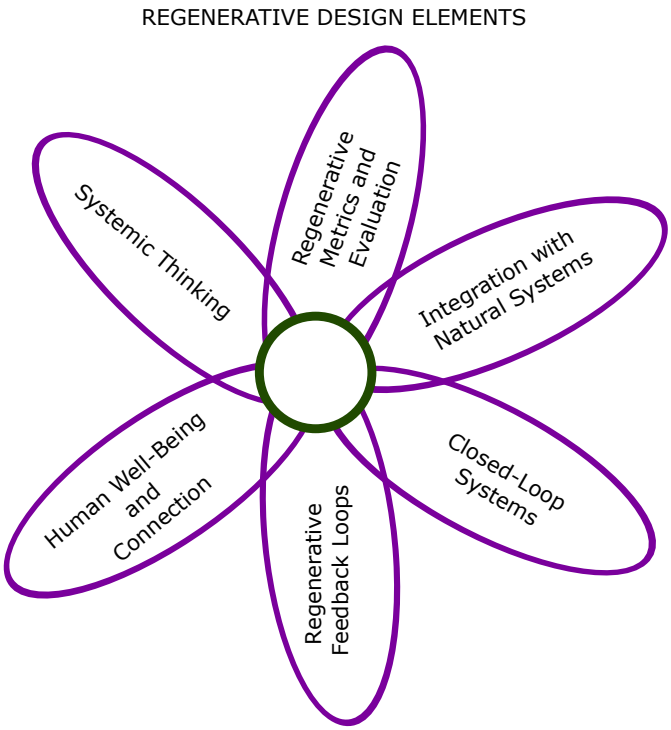


Figure 2. Schematic representation of regenerative design principles.

4. Indoor Environmental Quality (IEQ)

Indoor environmental quality (IEQ) refers to the overall conditions of indoor space that influence the comfort, well-being, and satisfaction of its occupants within the built environment [40]. It encompasses various elements such as air quality, thermal comfort, lighting, and acoustics, all of which play crucial roles in ensuring the well-being, comfort, and satisfaction of occupants within the built environment. Figure 3 highlights the essential components of IEQ, focusing on their interrelationships and impacts on occupant well-being and productivity.

One fundamental aspect is indoor air quality (IAQ). It refers to the air quality within buildings and structures, such as homes, offices, schools, and other indoor environments. It is a crucial aspect of our overall well-being, as we spend a significant amount of time indoors, especially in developed countries (e.g., USA), where people often spend more

than 90% of their time inside buildings. Several factors can influence indoor air quality, including ventilation, pollutants, temperature and humidity, building materials, and occupant activities. Adequate ventilation is essential to maintain good indoor air quality as it involves the exchange of stale indoor air with fresh outdoor air. Insufficient ventilation can accumulate pollutants and increase humidity levels, resulting in discomfort and potential health issues. Indoor air can contaminate various pollutants, including volatile organic compounds (VOCs), tobacco smoke, mold, pet dander, dust mites, and allergens. Gases such as carbon monoxide (CO) and nitrogen dioxide (NO_2) can also be present in indoor environments, especially in poorly ventilated areas or spaces with faulty appliances. Temperature and humidity levels in indoor spaces can impact comfort and air quality. High humidity levels can promote the growth of mold and mildew, while low humidity can cause dryness and discomfort. Temperature extremes, whether too hot or cold, can also affect indoor air quality and occupant well-being. Some building materials, such as asbestos and certain types of insulation or flooring, can release harmful particles or fibers into the air if damaged or deteriorating. Human activities within indoor spaces, such as cooking, smoking, using specific cleaning products, and operating equipment or machinery that emit pollutants, can also contribute to indoor air pollution. Poor IAQ can significantly impact human health, leading to respiratory problems, allergies, eye irritation, headaches, fatigue, and, in severe cases, even more serious conditions. Long-term exposure to indoor air pollutants has been linked to respiratory diseases, cardiovascular issues, and other health complications.

Thermal environment is another important aspect of indoor environmental quality that focuses on creating a comfortable and pleasant thermal experience for building occupants. It refers to the state of mind (subjective feeling) that individuals have when they are satisfied with the thermal conditions in their indoor environment. Achieving thermal comfort involves considering ambient temperature, humidity, air movement, and radiant heat. Proper control of heating, ventilation, and air conditioning systems, along with thoughtful building design and insulation, is crucial in achieving optimal thermal comfort. Providing occupants with an environment that promotes thermal satisfaction can enhance productivity and overall satisfaction.

Visual environment (lighting and daylighting) is an essential factor in creating a high-quality indoor environment. Adequate lighting levels and effective use of natural daylight contribute to occupant comfort, well-being, and productivity. Artificial lighting systems should be designed to provide appropriate illumination for various tasks and activities while minimizing glare and visual discomfort. Incorporating daylight into indoor spaces reduces reliance on artificial lighting, enhances visual comfort, positively affects occupants' mood and circadian rhythm, and helps establish a connection with the outdoors. Proper placement of windows, skylights, and light shelves can optimize daylight penetration while controlling solar heat gain. By maximizing the utilization of natural daylight and implementing energy-efficient artificial lighting systems, indoor environments can be optimized for visual comfort, occupant satisfaction, and energy efficiency.

Acoustic environment is another critical aspect of IEQ that pertains to creating a favorable auditory experience for occupants within a building. It involves managing sound levels, minimizing unwanted noise, and optimizing sound quality. While often overlooked, acoustics significantly influence occupants' comfort, concentration, and well-being. Excessive noise levels, echo, and poor speech intelligibility can create a stressful environment, leading to decreased productivity, lack of concentration, and impaired communication [41,42]. Achieving acoustic comfort requires controlling noise from external sources, such as traffic or construction, and internal sources, like HVAC systems, fans, or equipment. Proper insulation, sound-absorbing materials, and strategic room layout

can help reduce reverberation and echoes, enhancing speech intelligibility and reducing distractions. By ensuring a peaceful and acoustically pleasant environment, indoor spaces can promote concentration, productivity, and overall well-being for occupants.

Additionally, acoustic privacy is essential for IEQ. It pertains to individuals' ability to have private discussions or work without being disrupted by unwanted noise from neighboring areas. Inadequate acoustic privacy can negatively affect occupants' well-being, productivity, and overall satisfaction with their indoor environment. It can cause increased stress, reduced concentration, and compromised confidentiality. Furthermore, acoustic distractions can significantly affect productivity and concentration levels in various settings, such as offices, educational institutions, and healthcare facilities. In open-plan offices, for instance, the absence of adequate acoustic privacy can lead to reduced work performance, decreased focus, and lower cognitive abilities. It becomes challenging for employees to concentrate on tasks that require sustained attention, affecting overall work efficiency. Therefore, by ensuring proper acoustic privacy through thoughtful design, sound-absorbing materials, and sound masking systems, occupants can experience a healthier and more comfortable indoor environment conducive to productivity and well-being.

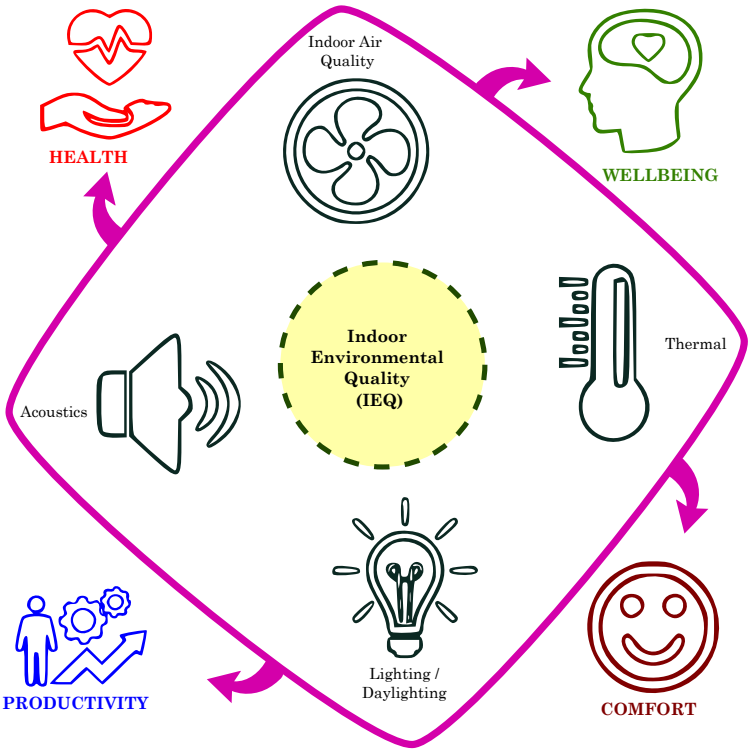


Figure 3. Key components influencing indoor environmental quality and their overall impact on human health and well-being. IEQ is shaped by factors such as indoor air quality (IAQ), thermal comfort, visual environment, and acoustics. A well-balanced IEQ promotes health, enhances well-being, boosts productivity, and increases comfort, fostering a more efficient and healthy environment. The schematic diagram is adapted from [43,44].

Together, these factors—air quality, thermal comfort, lighting, and acoustics—create an environment that nurtures health, enhances productivity, and fosters overall well-being. Building and facility managers, architects, and designers who prioritize these elements contribute significantly to creating spaces that support the physical, mental, and emotional health of their occupants. The integration of these features, as outlined in Figure 4, reflects key performance indicators (KPIs) for evaluating and improving indoor environmental quality. These KPIs are used as benchmarks to assess the effectiveness of various IEQ

measures, guiding the design and maintenance of spaces that improve quality of life for all occupants.

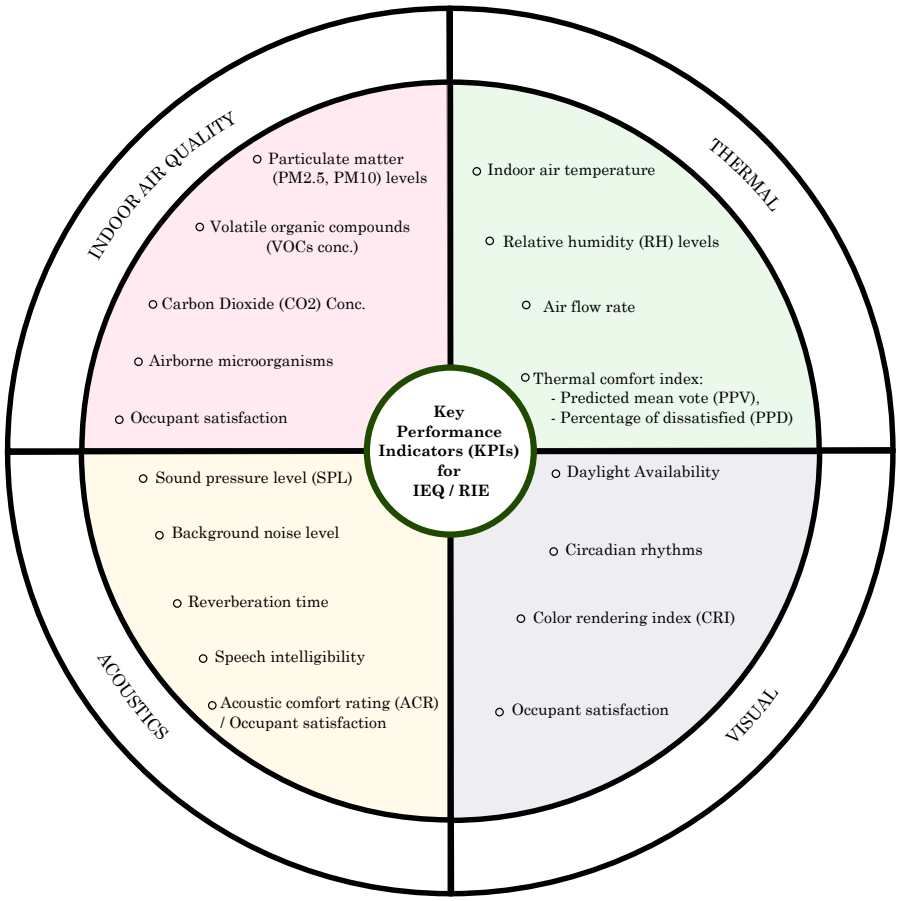


Figure 4. Key performance indicators for indoor environmental quality (IEQ)/regenerative indoor environment (RIE). This information was from sourced from [15,45,46].

5. Integrating Regenerative Design with IEQ

Regenerative design is a holistic approach to creating spaces that restore and enhance the natural environment while prioritizing human health and well-being. By incorporating principles of IEQ, regenerative design can greatly enhance indoor air quality, improve occupant comfort, and boost overall building performance. This integration can be achieved through various methods, including the following:

5.1. Indoor Air Quality (IAQ)

Achieving superior IAQ through regenerative design involves more than just reducing pollutants; it requires adopting strategies that actively improve and rejuvenate the air within a space. Biophilic design is crucial in leveraging nature's natural air-purifying abilities. It has been shown that using indoor plants and green walls can greatly improve indoor air quality (for example, by lowering the indoor CO_2 label) [47–52]. Selecting a variety of plants known for their air-cleaning properties, such as spider plants, peace lilies, and snake plants, helps remove toxins like formaldehyde and benzene from the air. Creating living walls with these plants increases the surface area available for air purification and assists in regulating indoor humidity. Optimizing natural light within the space reduces reliance on artificial lighting, which can sometimes contribute to indoor air pollutants through off-gassing.

Material selection is another key aspect of regenerative design aimed at improving IAQ. To enhance IAQ, it is vital to choose building and household materials that are natural,

eco-friendly, and sustainable. Selecting materials with low volatile organic compound (VOC) emissions is particularly important, as these materials help minimize indoor air pollution [53]. Natural materials such as wood, stone, and wool are often preferable because they generally release fewer harmful chemicals compared to synthetic alternatives [54,55]. Additionally, using low-VOC paints, adhesives, and finishes contributes to a healthier indoor environment by reducing the emission of potentially harmful substances. It is also important to recognize that electronic products, furniture, and textiles can introduce new sources of indoor air pollution, making careful material selection and management essential for maintaining high IAQ [56]. Biocoating paints have recently gained significant attention in sustainable building design, particularly for enhancing indoor air quality. These cutting-edge paints, dubbed "Green Living Paint", created by Krings et al. [57], contain live bacteria, specifically *Chroococcidiopsis cubana*. This bacterium performs photosynthesis, producing oxygen while capturing CO_2, thereby improving air quality in enclosed spaces by increasing oxygen levels and helping to mitigate greenhouse gas emissions. As a result, these paints serve as valuable tools for promoting healthier indoor environments. *Chroococcidiopsis cubana* thrives in arid conditions and requires minimal water, making it adaptable to various climates. The potential applications of these paints are extensive, ranging from residential and commercial buildings to public spaces, all of which can benefit from cleaner, fresher air. Moreover, these paints may facilitate self-cleaning surfaces that reduce indoor pollutants and incorporate sensors for real-time air quality monitoring. However, challenges such as ensuring the long-term viability of the bacteria, addressing regulatory and safety concerns, and promoting public acceptance of living organisms in paints need to be carefully considered. Moreover, the National Aeronautics and Space Administration (NASA)'s Mars Oxygen In-Situ Resource Utilization Experiment (MOXIE) showcases a groundbreaking approach to oxygen production by extracting carbon dioxide from Mars' atmosphere [58]. The MOXIE instrument electrochemically splits CO_2 molecules into oxygen and carbon, analyzing the oxygen for purity before venting it back into the Martian atmosphere along with the carbon and other exhaust byproducts. This regenerative technology has potential applications for improving IAQ on Earth. By utilizing similar methods to convert CO_2 into breathable oxygen, we could create systems that enhance air quality in enclosed environments, contributing to healthier living and working spaces. Such advancements in air purification and oxygen generation could be crucial in sustainable building designs and indoor environmental management.

Efficient ventilation and advanced air filtration are critical for maintaining good IAQ [59–61]. According to the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) standards 6.1 and 6.2, it is essential to design ventilation systems that optimize fresh air intake while reducing energy consumption. Implementing balanced ventilation systems and heat recovery ventilation (HRV) can improve energy efficiency while ensuring a steady supply of fresh air. To capture fine particles and pollutants, employing high-efficiency particulate air (HEPA) and activated carbon filters is effective. Additionally, installing air quality monitoring systems with sensors that continuously track parameters such as CO_2 levels, particulate matter, and humidity allows for real-time adjustments to ventilation and filtration systems, ensuring optimal IAQ [62].

Effective moisture control is essential for optimal IAQ and ensuring a healthy and comfortable environment. According to the Occupational Safety and Health Administration (OSHA) standards, relative humidity levels in indoor spaces should fall within specific ranges: below 60% for general indoor settings, between 30% and 50% for school buildings, and between 20% and 60% for offices and larger spaces. Maintaining these humidity levels helps mitigate risks such as mold growth and structural damage, which can adversely affect both the building and its occupants. Proper moisture management involves addressing

common sources of excess moisture, such as roof leaks, rain penetration through faulty windows, and design or construction defects [63]. In addition, ensuring adequate ventilation, particularly in moisture-prone areas like bathrooms and kitchens. Dehumidifiers and effective waterproofing measures further support moisture control by preventing water infiltration and managing indoor humidity, thus safeguarding the building's integrity and the health of its occupants.

Waste reduction and management further contribute to a healthier indoor environment. Minimizing single-use plastics and disposable items is particularly important, as these materials often release VOCs, contributing to indoor air pollution and respiratory problems. Reducing the use of such products helps lower VOC emissions and improves indoor air quality. Additionally, efficient waste management systems are vital in ensuring proper disposal, which prevents unpleasant odors and potential health hazards [64]. Proper waste segregation, which involves sorting waste into recyclables, compostables, and non-recyclables, further enhances recycling efficiency and reduces contamination, leading to more effective waste processing. This practice supports recycling efforts and decreases landfill use. For example, composting organic waste rather than sending it to landfills reduces methane emissions, a potent greenhouse gas. Thus, effective waste segregation and disposal practices are essential for maintaining a clean and healthy indoor environment.

Finally, monitoring and adaptive controls are crucial for continuously enhancing IAQ. The installation of IAQ monitoring systems provides valuable real-time data by tracking key air quality parameters such as pollutants, humidity, and temperature. These data are essential for adaptive control systems, which automatically adjust ventilation, filtration, and other environmental factors in response to changing air quality conditions, ensuring a healthy indoor environment. In particular, adaptive HVAC control systems contribute to low-energy IAQ management by utilizing various digital technologies [65,66]. Innovations such as the Internet of Things (IoT), Building Information Modeling (BIM), and machine learning play a pivotal role in integrating and visualizing data from multiple sources [67–69]. These technologies enable a web-based interface that facilitates easy data retrieval, rapid prediction, and intelligent control through sophisticated backend algorithms, making it possible to manage indoor air quality efficiently and effectively while minimizing energy consumption.

5.2. Thermal Environment

Regenerative design can significantly enhance indoor thermal comfort and overall environmental quality by integrating various innovative strategies that address building performance and occupant well-being. A key component of regenerative design is harnessing natural systems. For instance, biomimicry draws inspiration from nature's efficient energy strategies, such as the passive cooling systems found in termite mounds. These mounds regulate temperature through natural convection and ventilation via tunnels and chimneys, effectively maintaining stable internal temperatures despite external fluctuations [70]. By emulating these natural processes, regenerative design incorporates passive cooling techniques that enhance energy efficiency and comfort.

Green walls, or living walls, are another crucial element in achieving thermal comfort indoors [71,72]. They function as additional insulation layers that stabilize indoor temperatures by reducing heat loss in winter and minimizing heat gain in summer. The plants on green walls absorb and reflect sunlight, lowering indoor temperatures and decreasing the need for air conditioning. Additionally, through evapotranspiration, plants release moisture into the air, which cools the surrounding environment and combats the dryness caused by air conditioning [73]. Green walls also improve indoor air quality by filtering pollutants and releasing oxygen, contributing to a healthier atmosphere. They further act

as sound barriers, reducing external noise pollution, and add aesthetic value that enhances mood and reduces stress [74].

Solar shading techniques are vital in managing solar heat and light, thereby improving thermal and visual comfort [75–78]. By controlling the amount of sunlight that enters a building, solar shading helps maintain a stable indoor temperature and reduces reliance on mechanical cooling systems, leading to improved energy efficiency. External shading methods like overhangs, awnings, adjustable louvers, and green roofs can effectively block sunlight before it enters the building, reducing heat gain and glare [79]. Internal shading options, such as blinds and curtains, provide additional control over light and heat. Dynamic systems like automated blinds and smart glass adjust in real-time based on environmental conditions, optimizing shading and enhancing energy efficiency. These techniques improve thermal comfort, reduce cooling costs, and offer better glare control and privacy.

High-performance building envelopes also contribute significantly to indoor thermal comfort. These envelopes are designed to minimize heat gain and loss through advanced materials and construction techniques [80]. They often include superior insulation, low-emissivity windows, and airtight construction to reduce thermal bridging and air leakage.

Strategies such as improving building insulation can be effective in reducing energy consumption. However, thermal energy storage (TES) is one of the most promising methods. TES systems store thermal energy during periods of low demand or availability and release it during peak times. TES can be used for cooling and heating, with three main methods: sensible heat, latent heat, and chemical reactions. A lot of research has been carried out on phase change materials (PCMs)-based latent heat thermal energy storage (LHTES) in the last few years [81–87]. PCMs store and release energy during phase transitions (e.g., solid to liquid, liquid to gas) at specific temperatures, allowing for energy storage with minimal temperature fluctuations. Several PCMs are commonly used in building applications to enhance thermal energy storage and manage indoor temperatures. Some of the most common types of PCMs are inorganic (like salts, salt hydrates, and metallic PCMs), organic (like paraffin wax and non-paraffin materials like fatty acids, esters, and alcohols), and eutectic (like eutectic salts) [88]. These materials generally exhibit phase transition temperatures between 15 °C and 30 °C [89]. They are utilized in the construction of building envelopes, including gypsum board panels, bricks, wall panels, insulation boards, ceiling tiles, floor coverings, glazed windows, heat exchangers, and underfloor heating systems [90]. Moreover, by leveraging renewable energy sources like geothermal, wind, or solar [91–94], TES systems can decrease reliance on conventional energy sources while improving thermal comfort in buildings.

Advanced HVAC systems, including heat pumps and radiant heating, significantly improve energy efficiency and enhance aesthetic appeal, contributing to better thermal comfort [95–99]. Heat pumps are highly efficient, transferring heat for both heating and cooling, which reduces energy consumption and lowers costs. Radiant heating, which distributes warmth evenly through floors or walls, eliminates drafts and enhances occupant comfort. These systems can be seamlessly integrated into interiors, fostering sustainable energy use while creating inviting and comfortable spaces. Smart HVAC systems, which adjust heating, ventilation, and air conditioning based on real-time environmental data, further boost energy efficiency by optimizing energy consumption according to occupancy patterns, outdoor weather, and indoor air quality. These systems enhance comfort while helping to reduce energy use, aligning with the broader goals of regenerative design by minimizing environmental impact and promoting positive contributions to the surrounding ecosystem. Additionally, adaptive design and user-interactive controls refine thermal comfort by incorporating smart building technologies [100]. These technologies use sensors

and automation to adjust indoor conditions based on occupancy, weather, and individual preferences, allowing for a more personalized and comfortable indoor experience.

5.3. Visual Environment

Improving visual comfort in indoor environments through regenerative design involves a multifaceted approach. It focuses on natural and artificial lighting, material choices, and user adaptability.

Natural lighting, or daylighting, is key to enhancing visual comfort. Research consistently demonstrates that daylighting aids in regulating circadian rhythms, vital for regulating various physiological processes and overall well-being [101]. Regenerative design optimizes natural light through careful planning and strategic techniques. Key elements include the size, orientation, and placement of windows [102]. When positioned thoughtfully, windows enhance daylight while minimizing glare and excessive heat gain, leading to a well-lit, comfortable interior environment. Furthermore, dynamic glazing, which adjusts its opacity in response to changing light conditions, is essential for managing light transmission. This technology helps reduce glare and ensures consistent visual comfort throughout the day.

Artificial lighting plays a vital role in visual comfort, particularly in areas with limited natural light. For optimal comfort, it is recommended to use lighting systems with a Color Rendering Index (CRI) of 80 or higher to ensure accurate color representation and minimize visual strain. Adjustable fixtures with variable brightness and color temperatures ranging from 2700 K to 5000 K allow users to customize their environments. Task lighting should provide 300–500 lumens for clarity, while uniform light distribution of 300–500 lux helps prevent harsh shadows and excessive contrast. Additionally, glare reduction through diffusers or indirect lighting enhances visual comfort and supports overall well-being.

Additionally, integrating circadian lighting design that mimics natural light patterns helps regulate sleep–wake cycles and overall health [103]. Equivalent Melanopic Lux (EML) is a special measurement that shows how a light source affects melanopsin receptors, which are important for circadian rhythms [104]. Unlike traditional lux, EML measures how effectively a light supports our internal biological clocks. For effective circadian lighting design, recommended EML values vary by time of day: 200 to 400 EML during the day for alertness, 10 to 50 EML in the evening to minimize circadian disruption and support sleep, and ideally below 10 EML at night to avoid disturbing circadian rhythms.

Incorporating biophilic design elements such as indoor plants and water features further enhances visual comfort. These natural elements improve visual aesthetics and soften and diffuse light, enhancing overall visual quality. Indoor plants help filter air pollutants, contributing to a healthier atmosphere, while water features provide calming sounds that reduce stress. Together, these elements foster a stronger connection with nature, promoting relaxation and well-being. Integrating biophilic features makes spaces more inviting and engaging, making occupants feel more at ease and connected to their environment.

Moreover, regenerative design enhances visual comfort through careful material selection, color palette choices, and spatial organization. Choosing materials with natural visual appeal and tactile qualities—such as wood, stone, and textiles—creates a pleasing sensory experience and a warm, inviting atmosphere. The color palette is another critical element; choosing hues harmonizing with the natural surroundings helps evoke a sense of calm and well-being. Integrating colors complementing the environment makes the space more cohesive and relaxing. Additionally, effective spatial organization is essential for visual comfort. Designing spaces with careful consideration of visual flow and balance ensures clear sightlines and appropriate proportions, which promotes a sense of order

and tranquility. This thoughtful arrangement helps to create an environment where visual elements are harmoniously integrated, enhancing overall comfort and satisfaction.

Recently, environmentally adaptive building envelope designs have garnered attention for their critical role in fostering sustainable and regenerative architecture. These designs aim to create dynamic facades that respond to changing environmental conditions, such as sunlight, temperature, and wind. Integrating features like adjustable shading systems, dynamic glazing, smart materials, and adaptive envelopes enhances energy efficiency, improve occupant comfort, and reduces environmental impact [105]. This innovative approach leads to the development of buildings that are both resilient and resource-efficient while positively influencing their surroundings. A notable example of emerging construction materials is high-performance translucent concrete (HPTC). This specialized concrete incorporates optical fibers, polymethyl methacrylate (PMMA) fibers, or other light-transmitting materials, allowing it to transmit light while maintaining the strength and durability of traditional concrete [106–108]. The concept, introduced by Hungarian architect Aron Losonczi in 2001, aims to combine concrete's robust qualities with innovative light-transmitting properties [109,110]. This feature enhances aesthetic appeal and functionality by reducing the need for artificial lighting, improving indoor environmental quality, and fostering a connection between indoor and outdoor areas. Additionally, it helps regulate indoor temperatures and creates dynamic lighting effects, contributing to energy savings and occupant well-being. Ultimately, translucent concrete supports sustainable practices by lowering energy consumption and potentially utilizing recycled materials, making it a compelling choice for modern, eco-friendly buildings.

5.4. Acoustic Environment

The regenerative design approach plays a key role in achieving sustainable acoustic solutions for indoor environments. It integrates acoustics with broader design strategies, ensuring they align with other sustainability goals like energy efficiency, thermal comfort, and indoor air quality. A well-insulated, airtight building envelope, central to regenerative design, helps reduce external noise sources, such as traffic or industry. This design acts as an acoustic shield, maintaining indoor comfort. Additionally, energy efficiency reduces reliance on noisy HVAC systems, which can be designed to minimize noise, enhancing both energy savings and acoustic comfort.

Regenerative design principles often integrate biophilic elements, emphasizing a connection to nature. Such biophilic spaces generally foster more pleasant and calming atmospheres, contributing to acoustic comfort by reducing stress and anxiety [111]. Biophilic design typically features natural materials and textures, greenery, indoor plants, and water elements, all known for their beneficial acoustic properties. Additionally, indoor green walls and plants improve IEQ by purifying air pollutants and enhancing visual and auditory aesthetics [112,113]. These elements serve as natural sound barriers, absorbing sound and breaking up sound waves to reduce noise pollution. Eşmebaşı and Lau [114] recently investigated how indoor greenery and traffic sounds through open or closed windows affect audio-visual perception in a shared office setting for two people. They used 32 audio-visual stimuli, combining varying greenery levels (0%, 7%, 10%, 13%) with traffic sound levels (50 dBA, 55 dBA, 60 dBA, 65 dBA), presented to 42 participants via screens and headphones. Their partial least squares structural equation model analyzed the interplay between greenery, traffic sounds, and perceptual attributes like pleasantness and visual aesthetics. The study found that traffic sound levels significantly influence visual perception, with indoor greenery enhancing auditory pleasantness indirectly, supporting biophilic design for better acoustic and visual comfort in office spaces.

Planted trees can function like sonic crystals, effectively reducing noise in urban environments through their strategic arrangement and unique physical properties [115–119]. When arranged in specific, periodic patterns, these trees can manipulate sound waves to boost their noise-reducing effects. This phenomenon is rooted in the principles of metamaterials, where the arrangement and physical properties of materials can control sound propagation [120,121]. The sonic crystals formed by these trees can produce band gaps—frequency ranges where sound waves are significantly attenuated or blocked. By strategically spacing trees and varying their heights and trunk diameters, urban planners can optimize these band gaps to target specific noise frequencies, such as traffic-generated ones. Studies have shown that increasing tree stem diameter and reducing spacing between trees enhance the effectiveness of noise reduction, leading to significant insertion losses at lower frequencies [122–124]. The mechanisms behind this noise reduction include scattering, diffraction, and sound wave absorption. Specifically, tree leaves and branches scatter sound, while trunks and root systems absorb vibrations. However, when leaves are oriented in a particular direction, they can enhance reflected sounds, ultimately increasing the transmitted noise levels. Additionally, the forest floor contributes to further sound dampening, creating a multi-layered defense against noise pollution. By employing design strategies that treat urban forests as engineered arrays, we can harness the natural acoustic properties of trees to create effective green buffers against unwanted noise. This approach enhances the auditory environment while promoting biodiversity and improving urban aesthetics. In essence, planted trees serve as both functional and aesthetic components of urban design, significantly contributing to noise management and enhancing the quality of life in cities.

Moreover, water features such as curtains or fountains play a significant role in enhancing acoustic comfort by masking unwanted noise and creating a soothing background sound. Research supports that these elements can effectively mitigate intrusive sounds and improve the overall auditory indoor environment and soundscapes [125–128]. For instance, Yang et al. [129] explored how indoor water sounds affect the perception of environmental noise through natural ventilation openings. The study involved 40 participants (18 women and 22 men) aged 19 to 27, measuring water sound levels from 35.8 dBA to 59.8 dBA and environmental noise from 43.0 dBA to 62.1 dBA. Results showed that water sounds improved perceptions of environmental noise, reducing annoyance and enhancing feelings of pleasantness, calmness, and naturalness, with pleasantness being the most sensitive attribute. Women were more responsive to water sounds than men, especially regarding noisiness, loudness, and annoyance. However, water masking systems can add background noise, so they should be designed carefully to meet specific needs.

Acoustic absorber panels are frequently used for improving indoor acoustic comfort by reducing noise and controlling reverberation [130]. In recent years, the emphasis on sustainability has led to the development of acoustic panels made from reused or recycled materials. Textile waste, such as discarded clothing and fabric scraps, is repurposed effectively due to its fibrous structure, which improves sound attenuation and aligns with circular economy goals by reducing landfill waste and lessening the demand for new materials [131]. Similarly, agricultural byproducts like straw, coconut fibers, fruit stones, husks, and shells are utilized for their natural sound-absorbing properties, as shown in research by Segura et al. [132] and Sheikhmozafari [133], turning potential waste into valuable resources. Animal-based waste, including wool and hides, offers unique acoustic benefits, providing excellent thermal insulation and sound absorption, thus contributing to a more sustainable life cycle for building materials [134–137]. Natural fibers such as hemp, jute, and flax, along with waste materials such as recycled papers and polyurethane waste, are also recognized for their acoustic performance and environmental advantages, helping

to reduce the carbon footprint of construction materials [138–141]. Incorporating these reused materials aligns with circular economy principles by promoting the extended use of resources, minimizing waste, and reducing the environmental impact of new material production [142].

Table 1 highlights key regenerative design interventions for enhancing Indoor Environmental Quality (IEQ) by improving occupant health, comfort, and productivity while reducing environmental impact. For IAQ, strategies include low-emission materials, natural ventilation, and air-purifying systems. Thermal interventions focus on passive heating and cooling, energy-efficient HVAC, and proper insulation. Visual environment improvements emphasize maximizing daylight, controlling glare, and providing task-specific lighting. In acoustics, sound-absorbing materials, noise-reducing layouts, and natural noise barriers are used to create quieter spaces. These interventions support a healthier, more sustainable environment, aligning human well-being with ecological balance. The table also lists relevant standards and frameworks for regenerative design.

Table 1. Regenerative design-based interventions and available standards or frameworks for IEQ [15,45,46].

IEQ Components	Interventions	Standards/Frameworks [1]
Indoor air quality environment	Indoor plants, green roofs/walls, vegetation, dynamic ceilings, smart low-emission materials, natural recyclable materials, adaptive building envelope, building management systems (BMS), etc.	EPA, WHO, NIOSH, OSHA, ANSI/ASHRAE 62.1, CEN (UNI EN 16798-1), LEED V4, BREEAM, CASBEE, LBC V4, WELL-BUILDING (IWBI), ILFI
Thermal environment	Green roofs/walls, passive heating and cooling systems, dynamic ceilings, nature-based solar shading (e.g., tree plantations, green facades), wind barriers, building design and orientation, BMS, smart materials, adaptive building envelope, energy-efficient HVAC systems, etc.	ANSI/ASHRAE 55, CEN (UNI EN 16798-1), CEN (EN ISO 7730), LEED V4, BREEAM, CASBEE, LBC V4, WELL-BUILDING
Visual environment	Dynamic ceilings, switchable glazing systems, adaptive building envelope, automated shading technologies, solar tubes and sheds, window solar shelves, automated artificial lighting, BMS, etc.	CEN (UNI EN 16798-1), CEN (EN 12464-1), CIBSE, USGBC, DGNB, IES, LEED V4, BREEAM, CASBEE (Q1), LBC V4 (I09), WELL-BUILDING (L01 to L09), ILFI
Acoustic environment	Natural noise barriers (e.g., green roofs/walls, water features), sound-absorbing panels, noise barriers, natural and recycled materials, advanced acoustic materials (e.g., metamaterials), adaptive building envelope, etc.	CEN (UNI EN 16798-1), LEED V4, BREEAM, CASBEE (Q1), LBC V4, WELL-BUILDING (S01 to S07)

[1] EPA: Environmental Protection Agency, WHO: World Health Organization, NIOSH: National Institute for Occupational Safety and Health, OSHA: Occupational Safety and Health Administration, ANSI/ASHRAE: American National Standards Institute/American Society of Heating, Refrigerating, and Air-Conditioning Engineers, CEN: European Committee for Standardization, USGBC: U.S. Green Building Council, DGNB: Deutsche Gesellschaft für Nachhaltiges Bauen, IES: Illuminating Engineering Society, LEED: Leadership in Energy and Environmental Design, BREEAM: Building Research Establishment Environmental Assessment Method, CASBEE: Comprehensive Assessment System for Built Environment Efficiency, LBC: Living Building Challenge, WELL-BUILDING (IWBI): WELL Building Standard (International WELL Building Institute), ILFI: International Living Future Institute.

6. Case Studies

In recent years, regenerative design principles have garnered considerable attention as a promising approach to improving IEQ in buildings. These principles integrate various factors, including energy efficiency, sustainable materials, water management, air quality, and biophilic elements, all working in harmony to create environments that promote human health and adaptability. Recent case studies provide compelling evidence of the successful implementation of regenerative design strategies, demonstrating how they improve both environmental performance and occupant well-being. This section explores several notable examples, showcasing how regenerative design is being applied in real-world settings to achieve both ecological sustainability and enhanced quality of life.

For instance, Rendy Abdillah et al. [143] explored regenerative design strategies in a medium-rise residential building in Jakarta, Indonesia, evaluating the impact of passive ventilation, window side fins, light shelves, green roofs, and photovoltaic systems on thermal comfort and daylight performance across current and future climate scenarios. Their findings revealed substantial improvements in thermal comfort, with up to 94% of days in the 2020s meeting ASHRAE-55 standards [144]. However, the energy production capacity of photovoltaic panels declined by the 2080s, covering only 30% of cooling demand. Despite a reduction in daylight availability, the study emphasized the potential of integrated regenerative solutions, such as photovoltaic green roofs, suggesting further exploration of their long-term effects.

In another case study, Petrovski et al. [145] examined the implementation of regenerative design principles in the refurbishment of Spain's first regenerative building, designed to meet the Living Building Challenge (LBC) standards. This study highlighted both the challenges and benefits of regenerative design, such as the need for transparent material sourcing, high upfront costs for systems like photovoltaic panels and energy storage, and navigating regulatory barriers. Despite these hurdles, the research demonstrated that regenerative design could successfully integrate human and environmental systems, improving biodiversity, urban agriculture, and water management. The study further emphasized the importance of an integrated project team and effective management throughout all project phases to overcome challenges and meet LBC imperatives. Together, these case studies offer valuable insights into the evolving field of regenerative design, advocating for the broader adoption of these principles to create energy-positive, contextually responsive, and climate-resilient buildings.

Biomimicry in architecture also presents significant opportunities to enhance regenerative design. Nature provides examples of resilient materials and optimized structural forms that inspire sustainable building practices. For example, Mouton et al. [146] conducted a life cycle assessment (LCA) to evaluate regenerative design strategies by examining the environmental impacts of bio-based building materials, such as timber, straw, and hemp, in a European context. Their results demonstrate that bio-based materials generally exhibit much lower embodied greenhouse gas (GHG) emissions than conventional materials like brick or concrete. This highlights the environmental benefits of using bio-based construction materials as alternatives to traditional options, while also pointing to key environmental trade-offs within bio-based materials that require further investigation.

In a separate study, Mouton et al. [147] analyzed the environmental impacts of two passive solar design buildings—be2226 and N11 SolarHouse—that were designed to eliminate the need for active heating or cooling systems. Their findings showed that the N11 building successfully meets established climate targets, further demonstrating the potential of regenerative design strategies in reducing environmental impacts.

The integration of circular economy principles is another key strategy for advancing sustainable building practices. Sah and Hong [148] examined the application of circular economy principles at the Taiwan Sugar Company (TSC), which focused on redesigning production processes, establishing closed-loop systems, and improving resource efficiency. Following the British Standard 8001:2017 [149], their study highlighted TSC's progress in adopting renewable energy, repurposing byproducts, developing sustainable packaging, and utilizing output products for industrial or agricultural purposes. These initiatives contributed to reducing waste and enhancing environmental performance.

These case studies provide valuable insights into the expanding potential of regenerative design. The effective implementation of these strategies underscores the need for interdisciplinary collaboration and ongoing research to further advance regenerative design in the built environment.

7. Notable Buildings Projects Worldwide

Across the globe, numerous notable buildings showcase regenerative design concepts [150–153]. One example is the Bullitt Center in Seattle, USA, often hailed as one of the 'greenest' commercial buildings in the world. It integrates regenerative principles such as solar panels for energy generation, rainwater harvesting, composting toilets, and natural ventilation, alongside biophilic elements like green roofs and living walls, creating a restorative space for occupants. In Amsterdam, the Edge showcases a blend of regenerative design with cutting-edge technology, featuring solar panels, geothermal energy, and smart lighting systems, alongside open-plan spaces, indoor plants, and flexible workstations that promote health and collaboration. In Milan, Bosco Verticale (Vertical Forest) represents an innovative approach to urban sustainability, with residential towers covered in over 9000 trees and 5000 plants, improving air quality, reducing noise, and offering a direct connection to nature for the residents. In Shanghai, the Shanghai Tower incorporates a range of sustainable features, including a double-glazed façade that improves energy efficiency, a rainwater collection system, and wind turbines that generate renewable energy, while its innovative design helps reduce its environmental footprint. Furthermore, the Crystal in London functions as a hub for sustainable urban innovation, incorporating rainwater harvesting, energy-efficient systems, green roofs, and solar panels to reduce reliance on traditional energy sources, while ensuring an optimal indoor environment for comfort and productivity.

The 50/50 City Plan in Singapore, conceived by the WOHA group, offers another groundbreaking example of regenerative design. The plan envisions a city where 50% of the space is dedicated to nature, including green spaces, parks, and natural systems, while the other 50% is allocated to buildings and infrastructure. This vision aims to harmonize urban development with ecological sustainability by integrating nature-based solutions like vertical gardens, green roofs, and passive cooling systems alongside energy-efficient, low-impact architecture. The 50/50 City Plan seeks to improve environmental performance while enhancing occupant well-being through access to nature, reducing urban heat islands, and promoting biodiversity. This concept emphasizes the importance of cities as dynamic ecosystems, advocating for a more balanced, resilient, and sustainable urban future.

The Circular House in the Netherlands is another pioneering example, being one of the world's first social housing projects built according to circular principles [154]. Designed by 3XN Architects, the project serves as a model for circular construction in Denmark, with 90% of its materials designed for disassembly, reuse, or resale without loss of value. Sustainable materials like cork and old newspapers for the façade, eelgrass and granules for insulation, and used car tires for the flooring's underlay were employed, demonstrating the feasibility and profitability of circular construction. Supported by the

Danish Environmental Protection Agency and Realdania, the project is expected to reduce CO_2 emissions from building materials by 38% by 2050, with an estimated economic potential of EUR 7.75 billion annually for Denmark's building industry by 2035. These buildings exemplify how regenerative design principles can harmonize environmental sustainability with occupant well-being.

8. Challenges

The regenerative design approach, while promising for enhancing indoor environmental quality (IEQ), faces challenges arising from the need for a paradigm shift, integration of complex systems, and collaboration across disciplines [155]. One major obstacle is shifting from a traditional, linear approach to a holistic, regenerative mindset. Conventional design often prioritizes short-term outcomes like efficiency and aesthetics, while regenerative design focuses on long-term sustainability by integrating systems such as energy, water, waste, and ecology. This requires a change in how architects, developers, and other stakeholders approach design, necessitating education and awareness programs to equip them with knowledge about regenerative principles, environmental restoration, and their potential to improve occupant health.

Economic considerations also pose a challenge, as regenerative design often requires substantial upfront investments in sustainable materials, renewable energy systems, and advanced technologies. While these buildings can provide long-term benefits such as energy savings and increased property value, the initial costs may deter developers focused on short-term returns. However, considering the life-cycle costs—including operational savings and tax incentives—highlights the long-term value of regenerative design, shifting the focus from immediate expenses to enduring benefits like improved occupant productivity and health.

Technical complexity is another barrier, as regenerative design requires the integration of energy, water, waste, and ecological systems. Ensuring these systems work harmoniously demands advanced expertise and innovative approaches. Tools like Building Information Modeling (BIM) help with this complexity by facilitating collaboration and predicting outcomes, though widespread adoption requires additional investments in training and software. Collaboration among architects, engineers, contractors, and sustainability experts is vital, though it can be challenging due to differing priorities. Overcoming these challenges requires a culture of collaboration and a shared understanding of regenerative design's value.

The regulatory and policy landscape also creates hurdles. Many building codes and zoning regulations are outdated and do not accommodate the integrated systems needed for regenerative practices, such as greywater recycling or the use of sustainable materials. Advocating for policy changes through case studies and pilot projects can help drive reform, supported by industry associations and professional bodies offering expertise to shape policy.

The specialized knowledge required for regenerative design presents another significant barrier, as it demands expertise across architecture, environmental science, engineering, and sustainable technologies. To bridge this gap, investment in professional development and training is essential, alongside collaboration with universities and research institutions. Certification programs and professional accreditations can further promote regenerative knowledge within the industry.

Lastly, the success of regenerative design depends on occupant behavior and engagement, as many systems rely on user participation, such as energy-saving practices or recycling. Changing established habits can be challenging, particularly when people are accustomed to conventional methods. Designing for diverse occupant needs adds

complexity, but effective engagement through education and incentives can support the success of regenerative systems.

Despite these challenges, regenerative design holds significant potential for creating healthier, more sustainable indoor environments. By addressing these barriers through education, collaboration, and innovation, regenerative practices can lead to buildings that benefit both occupants and the environment. Overcoming these obstacles requires a concerted effort from all stakeholders, focusing on long-term value and collective well-being.

9. Future Research Directions

Regenerative design, with its holistic approach to creating sustainable and human-centered environments, holds immense potential for enhancing indoor environmental quality (IEQ). As research in this innovative field progresses, several key areas deserve further exploration. One primary direction is quantifying the benefits of regenerative design, particularly its effects on occupant health, productivity, and cognitive function. Longitudinal studies should assess the long-term impacts of regenerative design features, while also comparing energy performance with conventional structures. This research should explore the direct health effects and how regenerative designs influence cognitive performance and productivity. At the same time, evaluating the long-term environmental benefits, such as carbon sequestration, water conservation, and waste reduction, will help solidify regenerative design as a viable solution for mitigating climate change and promoting ecological balance.

Technology will play a key role in advancing regenerative design, and future research should explore how cutting-edge technologies can optimize resource management and IEQ. The integration of advanced sensors, building automation systems, and artificial intelligence to monitor and adjust building environments will enable improved energy management and air quality. Research should delve into new materials, such as bio-based and self-healing coatings, to enhance both sustainability and performance. Additionally, exploring renewable energy sources like solar and wind will provide insights into their integration within regenerative buildings.

A major area for exploration is the integration of nature within the built environment, a core principle of regenerative design. Future research should investigate how elements like green roofs, vertical gardens, and natural lighting improve occupant well-being while benefiting the surrounding ecosystem. Additionally, studying the transition to a circular economy in regenerative design is essential. Research should assess material life cycles, particularly renewable and recyclable options, to understand their potential to reduce waste and promote material reuse. Exploring innovative approaches like 3D printing using sustainable materials should also be a focus.

As climate change presents increasing risks, regenerative design must prioritize resilience and adaptability. Future studies should integrate strategies that enhance the resilience of buildings and communities to withstand natural disasters and climate challenges. Research on passive design, energy-efficient systems, and sustainable water management will be vital. Collaboration across disciplines will also be critical, as architects, engineers, urban planners, and policymakers must work together to create holistic solutions. Collaborative platforms will facilitate knowledge exchange and improve regenerative design practices.

Long-term monitoring systems will be essential to assess the ongoing performance of regenerative design features. Research should focus on developing tools to track parameters like air quality and temperature. Retrofitting existing buildings with regenerative elements can also improve sustainability and IEQ. Comparative studies of successful regenerative projects worldwide can highlight best practices and inform how regenerative

design strategies can be adapted to various climates and cultural contexts. Establishing guidelines and regulatory frameworks will help drive the adoption of regenerative design on a larger scale.

Integrating Indigenous knowledge and engaging local communities in the design process will be essential for the success of regenerative design. Research should focus on how regenerative design can reflect local cultural and environmental contexts [156]. By addressing these research directions, we can deepen our understanding of regenerative design's potential to create healthier, more sustainable, and resilient environments that benefit both people and the planet. Additionally, the ethical dimensions of regenerative design will also require attention. Research should explore how regenerative design can promote inclusivity, accessibility, and social equity. Incorporating local communities' needs and aspirations into the design process is essential for ensuring equitable outcomes. Additionally, collecting data on occupant satisfaction and perceived IEQ will help refine design strategies. User feedback can provide valuable insights into how regenerative spaces are experienced and adapted.

Lastly, The future of regenerative design for indoor environment quality in the built environment hinges on deepening interdisciplinary collaboration among architects, engineers, policymakers, and building occupants. By integrating diverse expertise, this approach can evolve beyond mere sustainability to actively enhance occupant well-being and ecological harmony. For example, architects and engineers can innovate with biophilic design elements, advanced ventilation systems, and adaptive materials that respond to real-time environmental data, while policymakers can establish incentives and standards that prioritize health and resilience. Engaging building occupants ensures that solutions are user-centric, fostering spaces that not only minimize harm but regenerate air quality, natural light, and thermal comfort. This collaborative synergy can drive a paradigm shift, creating indoor environments that thrive as living systems, attuned to both human needs and planetary boundaries.

10. Conclusions

In conclusion, regenerative design represents a transformative approach to enhancing indoor environmental quality (IEQ) in our built spaces. Instead of merely minimizing harm, it emphasizes the active restoration and renewal of the ecosystems surrounding us. Compared to other design strategies like restorative, sustainable, and green design, regenerative design offers distinct advantages. Table 2 summarizes these benefits, illustrating how regenerative design enhances the built environment. However, to fully unlock its potential for improving IEQ, further research is needed in key areas, such as developing comprehensive methods to assess the broader benefits of regenerative strategies, integrating emerging technologies like smart building systems and innovative materials, and placing greater emphasis on occupant well-being throughout the design process. Ongoing monitoring and flexibility are essential to ensure that these solutions remain effective and adapt to changing needs and environmental conditions. The successful implementation of regenerative design will require strong collaboration across fields, involving architects, engineers, policymakers, and building occupants. By adopting these principles, we can create healthier, more sustainable, and resilient indoor environments that elevate the quality of life for all.

Table 2. Comparative advantages of regenerative design over other design approaches for the built environment.

Criteria	Regenerative Design	Restorative Design	Sustainable Design	Green Design	Conventional Design
Ecosystem Impact	Net-positive impact, regenerates ecosystems	Focuses on repairing ecosystems	Reduces negative impact, no active regeneration	Minimizes harm, lacks regeneration	Neutral or negative impact on ecosystems
Resource Management	Uses closed-loop systems, regenerates resources	Repairs, does not regenerate	Efficient use of resources, but not regenerative	Focus on eco-friendly materials, not full circularity	Resource-intensive, little focus on regeneration
Human Well-being and Equity	Promotes social equity and community well-being	Some focus on well-being, but not equity	Focuses on healthier spaces, but less equity	Prioritizes health, lacks equity focus	Neglects social equity and well-being
Long-term Resilience	Adaptive and resilient systems	Restores but lacks adaptability	Focuses on resilience, less on long-term adaptability	Short-term environmental benefits	Limited resilience, short-term focus
Energy and Carbon Footprint	Net-positive energy, reduces carbon footprint	Repairs energy use, but not net-positive	Energy efficiency, still relies on external sources	Energy-efficient, lacks renewable energy focus	High energy consumption, carbon footprint
Material Use and Waste	Promotes zero waste and material regeneration	Reduces waste, but focus is on repair	Reduces waste and material efficiency, not full circularity	Focus on waste reduction, lacks full material regeneration	Wasteful, conventional materials
Biodiversity	Actively restores and enhances biodiversity	Restores ecosystems, indirect biodiversity benefits	Protects, but does not enhance biodiversity	Minimal impact on biodiversity	No focus on biodiversity, harms ecosystems
Innovation and Systems Thinking	Highly innovative, integrates systems thinking	Focuses on repair, not innovation	Efficient, lacks comprehensive system design	Relies on standard practices, limited innovation	Traditional methods, no systemic innovation
Economic Value	Long-term cost savings and positive returns	Economic benefits through restoration	Savings from efficiency, limited regeneration	Short-term savings, lacks long-term impact	Lower upfront costs, higher long-term costs
Community Engagement	Actively engages communities in regeneration	Limited focus on engagement	Focuses on health, not community involvement	Some focus on well-being, lacks strong community focus	No focus on community involvement

Author Contributions: Writing—original draft preparation, S.K.; writing—review and editing, S.K. and K.S.; visualization, S.K. and H.P.L.; supervision, K.S. and H.P.L. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Data Availability Statement: Not applicable.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Mang, P.; Haggard, B.; Regenesis, G. *Regenerative Development and Design: A Framework for Evolving Sustainability*; Wiley: Hoboken, NJ, USA, 2016.
2. Reed, B. Shifting from 'sustainability' to regeneration. *Build. Res. Inf.* **2007**, *35*, 674–680. [CrossRef]
3. Du Plessis, C. Towards a regenerative paradigm for the built environment. *Build. Res. Inf.* **2012**, *40*, 7–22. [CrossRef]
4. Gibbons, L.V. Regenerative—The new sustainable? *Sustainability* **2020**, *12*, 5483. [CrossRef]
5. Fischer, J.; Farny, S.; Abson, D.J.; Zuin Zeidler, V.; von Salisch, M.; Schaltegger, S.; Martín-López, B.; Temperton, V.M.; Kümmerer, K. Mainstreaming regenerative dynamics for sustainability. *Nat. Sustain.* **2024**, *7*, 964–972. [CrossRef]
6. Morseletto, P. Restorative and regenerative: Exploring the concepts in the circular economy. *J. Ind. Ecol.* **2020**, *24*, 763–773. [CrossRef]
7. Lyle, J.T. *Regenerative Design for Sustainable Development*; John Wiley & Sons: Hoboken, NJ, USA, 1996.
8. Cole, R.J. Regenerative design and development: Current theory and practice. *Build. Res. Inf.* **2012**, *40*, 1–6. [CrossRef]
9. Naboni, E.; Natanian, J.; Brizzi, G.; Florio, P.; Chokhachian, A.; Galanos, T.; Rastogi, P. A digital workflow to quantify regenerative urban design in the context of a changing climate. *Renew. Sustain. Energ. Rev.* **2019**, *113*, 109255. [CrossRef]
10. Camrass, K. Urban regenerative thinking and practice: A systematic literature review. *Build. Res. Inf.* **2022**, *50*, 339–350. [CrossRef]
11. Sala Benites, H.; Osmond, P.; Prasad, D. A neighbourhood-scale conceptual model towards regenerative circularity for the built environment. *Sustain. Dev.* **2023**, *31*, 1748–1767. [CrossRef]
12. Reith, A.; Brajković, J. *Scale Jumping: Regenerative Systems Thinking within the Built Environment. A Guidebook for Regenerative Implementation: Interactions, Tools, Platforms, Metrics, Practice*; COST Action CA16114 RESTORE, Working Group Five: Scale Jumping; Eurac Research: Bolzano, Italy, 2021.

13. Pistore, L.; Konstantinou, T.; Pasut, W.; Naboni, E. A framework to support the design of a regenerative indoor environment. *Front. Built Environ.* **2023**, *9*, 1225024. [CrossRef]
14. Toner, J.; Desha, C.; Reis, K.; Hes, D.; Hayes, S. Integrating Ecological Knowledge into Regenerative Design: A Rapid Practice Review. *Sustainability* **2023**, *15*, 13271. [CrossRef]
15. Kujundzic, K.; Stamatovic Vuckovic, S.; Radivojević, A. Toward Regenerative Sustainability: A Passive Design Comfort Assessment Method of Indoor Environment. *Sustainability* **2023**, *15*, 840. [CrossRef]
16. Pavez, F.; Maxwell, D.; Bunster, V. Towards a Regenerative Design Project Delivery Workflow: A Critical Review. *Sustainability* **2024**, *16*, 5377. [CrossRef]
17. Javanmard, Z.; Nava, C. Regenerative architecture in Practice: A multifaceted exploration of cladding systems to meet LEED standards. *Energy Build.* **2024**, *323*, 114810. [CrossRef]
18. Craft, W.; Ding, L.; Prasad, D.; Partridge, L.; Else, D. Development of a regenerative design model for building retrofits. *Procedia Eng.* **2017**, *180*, 658–668. [CrossRef]
19. Wei, W.; Wargocki, P.; Zirngibl, J.; Bendžalová, J.; Mandin, C. Review of parameters used to assess the quality of the indoor environment in Green Building certification schemes for offices and hotels. *Energy Build.* **2020**, *209*, 109683. [CrossRef]
20. McDonough, W.; Braungart, M. *Cradle to Cradle: Remaking the Way We Make Things*; North Point Press: New York, NY, USA, 2002.
21. McDonough, W.; Braungart, M. Towards a sustaining architecture for the 21st century: The promise of cradle-to-cradle design. *Ind. Environ.* **2003**, *26*, 13–16.
22. Plaut, J.M.; Dunbar, B.; Wackerman, A.; Hodgin, S. Regenerative design: The LENSES Framework for buildings and communities. *Build. Res. Inf.* **2012**, *40*, 112–122. [CrossRef]
23. Pawlyn, M. *Biomimicry in Architecture*; Routledge: Oxfordshire, UK, 2019.
24. Zari, M.P.; Hecht, K. Biomimicry for regenerative built environments: Mapping design strategies for producing ecosystem services. *Biomimetics* **2020**, *5*, 18. [CrossRef]
25. Zari, M.P. Ecosystem services analysis: Mimicking ecosystem services for regenerative urban design. *Int. J. Sustain. Built Environ.* **2015**, *4*, 145–157. [CrossRef]
26. Benyus, J.; Dwyer, J.; El-Sayed, S.; Hayes, S.; Baumeister, D.; Penick, C.A. Ecological performance standards for regenerative urban design. *Sustain. Sci.* **2022**, *17*, 2631–2641. [CrossRef]
27. Pearce, D.W.; Turner, R.K. *Economics of Natural Resources and the Environment*; Johns Hopkins University Press: Baltimore, MD, USA, 1989.
28. Camilleri, M.A. The circular economy's closed loop and product service systems for sustainable development: A review and appraisal. *Sustain. Dev.* **2019**, *27*, 530–536. [CrossRef]
29. Kara, S.; Hauschild, M.; Sutherland, J.; McAloone, T. Closed-loop systems to circular economy: A pathway to environmental sustainability? *CIRP Ann.* **2022**, *71*, 505–528. [CrossRef]
30. Velenturf, A.P.; Purnell, P. Principles for a sustainable circular economy. *Sustain. Prod. Consum.* **2021**, *27*, 1437–1457. [CrossRef]
31. Prakash, A. Green marketing, public policy and managerial strategies. *Bus. Strateg. Environ.* **2002**, *11*, 285–297. [CrossRef]
32. Buckton, S.J.; Fazey, I.; Sharpe, B.; Om, E.S.; Doherty, B.; Ball, P.; Denby, K.; Bryant, M.; Lait, R.; Bridle, S.; et al. The Regenerative Lens: A conceptual framework for regenerative social-ecological systems. *ONE Earth* **2023**, *6*, 824–842. [CrossRef]
33. Giusti, M.; Samuelsson, K. The regenerative compatibility: A synergy between healthy ecosystems, environmental attitudes, and restorative experiences. *PLoS ONE* **2020**, *15*, e0227311. [CrossRef] [PubMed]
34. Betley, E.C.; Sigouin, A.; Pascua, P.; Cheng, S.H.; MacDonald, K.I.; Arengo, F.; Aumeeruddy-Thomas, Y.; Caillon, S.; Isaac, M.E.; Jupiter, S.D.; et al. Assessing human well-being constructs with environmental and equity aspects: A review of the landscape. *People Nat.* **2023**, *5*, 1756–1773. [CrossRef]
35. Svec, P.; Berkebile, R.; Todd, J.A. REGEN: Toward a tool for regenerative thinking. *Build. Res. Inf.* **2012**, *40*, 81–94. [CrossRef]
36. Cianchi, B.; Everard, M.; Gething, B.; Cooke, R.; Ginepro, M. The efficacy of biodiversity and ecosystem assessment approaches for informing a regenerative approach to built development. *Integr. Environ. Assess. Manag.* **2024**, *20*, 248–262. [CrossRef]
37. Whalen, B. *Systems Thinking, Regenerative Design, and the Living Building Challenge in Post-Pandemic Workplace Interior Design*; Arizona State University: Tempe, AZ, USA, 2024.
38. Attia, S. *Regenerative and Positive Impact Architecture: Learning from Case Studies*; Springer: Berlin/Heidelberg, Germany, 2018. [CrossRef]
39. Oyefusi, O.N.; Enegbuma, W.I.; Brown, A.; Olanrewaju, O.I. Development of a novel performance evaluation framework for implementing regenerative practices in construction. *Environ. Impact Assess. Rev.* **2024**, *107*, 107549. [CrossRef]
40. Kumar, S.; Underwood, S.H.; Masters, J.L.; Manley, N.A.; Konstantzos, I.; Lau, J.; Haller, R.; Wang, L.M. Ten questions concerning smart and healthy built environments for older adults. *Build. Environ.* **2023**, *244*, 110720. [CrossRef]
41. Astolfi, A.; Pellerey, F. Subjective and objective assessment of acoustical and overall environmental quality in secondary school classrooms. *J. Acoust. Soc. Am.* **2008**, *123*, 163–173. [CrossRef]

42. Astolfi, A.; Puglisi, G.E.; Murgia, S.; Minelli, G.; Pellerey, F.; Prato, A.; Sacco, T. Influence of classroom acoustics on noise disturbance and well-being for first graders. *Front. Psychol.* **2019**, *10*, 2736. [CrossRef] [PubMed]
43. Kubba, S. Indoor Environmental Quality. In *Handbook of Green Building Design and Construction: LEED, BREEAM, and Green Globes*; Butterworth-Heinemann: Oxford, UK, 2017; pp. 353–412. [CrossRef]
44. Felgueiras, F.; Mourão, Z.; Moreira, A.; Gabriel, M.F. Indoor environmental quality in offices and risk of health and productivity complaints at work: A literature review. *J. Hazard. Mater.* **2023**, *10*, 100314. [CrossRef]
45. Lollini, R.; Pasut, W. Regenerative Technologies for the Indoor Environment Inspirational Guidelines for Practitioners. COST Action CA16114 RESTORE, Working Group Four Report. 2020. Available online: https://www.eurestore.eu/wp-content/uploads/2020/06/WG4_Final-Book_Regenerative-technologies-for-the-indoor-environment.pdf (accessed on 26 December 2024).
46. Romano, R.; Konstantinou, T.; Fiorito, F. Beyond sustainability. Regenerative technologies for a restorative indoor environment. *TECHNE-J. Technol. Archit. Environ.* **2021**, *21*, 315–326. [CrossRef]
47. Allen, J.G.; MacNaughton, P.; Satish, U.; Santanam, S.; Vallarino, J.; Spengler, J.D. Associations of cognitive function scores with carbon dioxide, ventilation, and volatile organic compound exposures in office workers: A controlled exposure study of green and conventional office environments. *Environ. Health Perspect.* **2016**, *124*, 805–812. [CrossRef]
48. Brilli, F.; Fares, S.; Ghirardo, A.; de Visser, P.; Calatayud, V.; Muñoz, A.; Annesi-Maesano, I.; Sebastiani, F.; Alivernini, A.; Varriale, V.; et al. Plants for sustainable improvement of indoor air quality. *Trends Plant Sci.* **2018**, *23*, 507–512. [CrossRef]
49. Chuang, K.J.; Lee, C.Y.; Wang, S.T.; Liu, I.J.; Chuang, H.C.; Ho, K.F. The Association between Indoor Carbon Dioxide Reduction by Plants and Health Effects. *Indoor Air* **2023**, *2023*, 1558047. [CrossRef]
50. Weerasinghe, N.H.; Silva, P.K.; Jayasinghe, R.R.; Abeyrathna, W.P.; John, G.K.P.; Halwatura, R.U. Reducing CO2 level in the indoor urban built environment: Analysing indoor plants under different light levels. *Clean. Eng. Technol.* **2023**, *14*, 100645. [CrossRef]
51. Shen, X.; Sun, Q.; Mosey, G.; Ma, J.; Wang, L.; Ge, M. Benchmark of plant-based VOCs control effect for indoor air quality: Green wall case in smith campus at Harvard University. *Sci. Total Environ.* **2024**, *906*, 166269. [CrossRef] [PubMed]
52. Han, K.T. Effects of window status and indoor plants on air quality, air temperature, and relative humidity: A pilot study. *J. Asian Archit. Build. Eng.* **2024**, *23*, 313–324. [CrossRef]
53. Alapieti, T.; Vornanen-Winqvist, C.; Mikkola, R.; Salonen, H. Measured and perceived indoor air quality in three low-energy wooden test buildings. *Wood Mater. Sci. Eng.* **2023**, *18*, 827–840. [CrossRef]
54. Babich, F.; Demanega, I.; Avella, F.; Belleri, A. Low polluting building materials and ventilation for good air quality in residential buildings: A cost–benefit study. *Atmosphere* **2020**, *11*, 102. [CrossRef]
55. Richter, M.; Horn, W.; Juritsch, E.; Klinge, A.; Radeljic, L.; Jann, O. Natural building materials for interior fitting and refurbishment—What about indoor emissions? *Materials* **2021**, *14*, 234. [CrossRef] [PubMed]
56. Arar, M.; Jung, C.; Qassimi, N.A. Investigating the influence of the building material on the indoor air quality in apartment in Dubai. *Front. Built Environ.* **2022**, *7*, 804216. [CrossRef]
57. Krings, S.; Chen, Y.; Keddie, J.L.; Hingley-Wilson, S. Oxygen evolution from extremophilic cyanobacteria confined in hard biocoatings. *Microbiol. Spectr.* **2023**, *11*, e01870-23. [CrossRef]
58. Jet Propulsion Laboratory, NASA. NASA's Oxygen-Generating Experiment MOXIE Completes Mars Mission. 2023. Available online: https://www.nasa.gov/missions/mars-2020-perseverance/perseverance-rover/nasas-oxygen-generating-experiment-moxie-completes-mars-mission/ (accessed on 26 September 2024).
59. Xu, Y.; Raja, S.; Ferro, A.R.; Jaques, P.A.; Hopke, P.K.; Gressani, C.; Wetzel, L.E. Effectiveness of heating, ventilation and air conditioning system with HEPA filter unit on indoor air quality and asthmatic children's health. *Build. Environ.* **2010**, *45*, 330–337. [CrossRef]
60. Liu, G.; Xiao, M.; Zhang, X.; Gal, C.; Chen, X.; Liu, L.; Pan, S.; Wu, J.; Tang, L.; Clements-Croome, D. A review of air filtration technologies for sustainable and healthy building ventilation. *Sustain. Cities Soc.* **2017**, *32*, 375–396. [CrossRef]
61. Ji, W.; Chen, C.; Zhao, B. A comparative study of the effects of ventilation-purification strategies on air quality and energy consumption in Beijing, China. *Build. Simul.* **2021**, *14*, 813–825. [CrossRef]
62. Swamy, G. Development of an indoor air purification system to improve ventilation and air quality. *Heliyon* **2021**, *7*, e08153. [CrossRef]
63. Persily, A.; Hewett, M. Using ASHRAE's new IAQ guide. *ASHRAE J.* **2010**, *52*, 75–82.
64. Amaral, R.E.; Brito, J.; Buckman, M.; Drake, E.; Ilatova, E.; Rice, P.; Sabbagh, C.; Voronkin, S.; Abraham, Y.S. Waste management and operational energy for sustainable buildings: A review. *Sustainability* **2020**, *12*, 5337. [CrossRef]
65. Zhang, J.; Chan, C.C.; Kwok, H.H.; Cheng, J.C. Multi-indicator adaptive HVAC control system for low-energy indoor air quality management of heritage building preservation. *Build. Environ.* **2023**, *246*, 110910. [CrossRef]
66. Cui, C.; Liu, Y. A hierarchical HVAC optimal control method for reducing energy consumption and improving indoor air quality incorporating soft Actor-Critic and hybrid search optimization. *Energy Conv. Manag.* **2024**, *302*, 118118. [CrossRef]

67. Shin, S.; Baek, K.; So, H. Rapid monitoring of indoor air quality for efficient HVAC systems using fully convolutional network deep learning model. *Build. Environ.* **2023**, *234*, 110191. [CrossRef]
68. Qian, Y.; Leng, J.; Zhou, K.; Liu, Y. How to measure and control indoor air quality based on intelligent digital twin platforms: A case study in China. *Build. Environ.* **2024**, *253*, 111349. [CrossRef]
69. Afroz, R.; Guo, X.; Cheng, C.W.; Omar, S.; Carney, V.; Zuidhof, M.J.; Zhao, R. Assessments and application of low-cost sensors to study indoor air quality in layer facilities. *Environ. Technol. Innov.* **2024**, *36*, 103773. [CrossRef]
70. Korb, J.; Linsenmair, K.E. The architecture of termite mounds: A result of a trade-off between thermoregulation and gas exchange? *Behav. Ecol.* **1999**, *10*, 312–316. [CrossRef]
71. Gómez, A.; Esenarro, D.; Martinez, P.; Vilchez, S.; Raymundo, V. Thermal Calculation for the Implementation of Green Walls as Thermal Insulators on the East and West Facades in the Adjacent Areas of the School of Biological Sciences, Ricardo Palma University (URP) at Lima, Peru 2023. *Buildings* **2023**, *13*, 2301. [CrossRef]
72. Mohammed, A.B. Employing systems of green walls to improve performance and rationalize energy in buildings. *J. Eng. Appl. Sci.* **2022**, *69*, 99. [CrossRef]
73. Oquendo-Di Cosola, V.; Olivieri, F.; Ruiz-García, L. A systematic review of the impact of green walls on urban comfort: Temperature reduction and noise attenuation. *Renew. Sustain. Energy Rev.* **2022**, *162*, 112463. [CrossRef]
74. Ma, X.; Du, M.; Deng, P.; Zhou, T.; Hong, B. Effects of green walls on thermal perception and cognitive performance: An indoor study. *Build. Environ.* **2024**, *250*, 111180. [CrossRef]
75. Yao, J. An investigation into the impact of movable solar shades on energy, indoor thermal and visual comfort improvements. *Build. Environ.* **2014**, *71*, 24–32. [CrossRef]
76. Evola, G.; Gullo, F.; Marletta, L. The role of shading devices to improve thermal and visual comfort in existing glazed buildings. *Energy Procedia* **2017**, *134*, 346–355. [CrossRef]
77. Dagher, S.; Akhozheya, B.; Slimani, H. Energy analysis studying the effect of solar shading on daylight factors and cooling hours in an extreme weather. *Energy Rep.* **2022**, *8*, 443–448. [CrossRef]
78. Pérez-Carramiñana, C.; González-Avilés, Á.B.; Castilla, N.; Galiano-Garrigós, A. Influence of Sun Shading Devices on Energy Efficiency, Thermal Comfort and Lighting Comfort in a Warm Semi-Arid Dry Mediterranean Climate. *Buildings* **2024**, *14*, 556. [CrossRef]
79. Yao, B.; Salehi, A.; Baghoolizadeh, M.; Khairy, Y.; Baghaei, S. Multi-objective optimization of office egg shadings using NSGA-II to save energy consumption and enhance thermal and visual comfort. *Int. Commun. Heat Mass Transf.* **2024**, *157*, 107697. [CrossRef]
80. Sozer, H. Improving energy efficiency through the design of the building envelope. *Build. Environ.* **2010**, *45*, 2581–2593. [CrossRef]
81. Al-Yasiri, Q.; Szabó, M. Incorporation of phase change materials into building envelope for thermal comfort and energy saving: A comprehensive analysis. *J. Build. Eng.* **2021**, *36*, 102122. [CrossRef]
82. Ji, R.; Li, X.; Lv, C. Synthesis and evaluation of phase change material suitable for energy-saving and carbon reduction of building envelopes. *Energy Build.* **2023**, *278*, 112603. [CrossRef]
83. Taj, S.A.; Khalid, W.; Nazir, H.; Khan, A.; Sajid, M.; Waqas, A.; Hussain, A.; Ali, M.; Zaki, S.A. Experimental investigation of eutectic PCM incorporated clay brick for thermal management of building envelope. *J. Energy Storage* **2024**, *84*, 110838. [CrossRef]
84. Tan, Q.; Liu, H.; Shi, Y.; Zhang, M.; Yu, B.; Zhang, Y. Lauric acid/stearic acid/nano-particles composite phase change materials for energy storage in buildings. *J. Energy Storage* **2024**, *76*, 109664. [CrossRef]
85. Mahmoud, M.; Yousef, B.A.; Radwan, A.; Alkhalidi, A.; Abdelkareem, M.A.; Olabi, A.G. Thermal assessment of lightweight building walls integrated with phase change material under various orientations. *J. Build. Eng.* **2024**, *85*, 108614. [CrossRef]
86. Liu, X.; Fan, Z.; Cao, X.; Wang, Y.; Luo, K.; Wang, L. Comprehensive performance of a novel radiative cooling phase change roof: An experimental study. *Appl. Therm. Eng.* **2024**, *243*, 122568. [CrossRef]
87. Ayadi, B.; Al-Ebrahim, M.A.; Rajhi, W.; Abu-Hamdeh, N.H.; Nusier, O.K.; Pham, V.; Karimipour, A. Simultaneous use of renewable energies and phase change materials to reduce energy consumption in Saudi buildings: Examine the photovoltaic cells. *Case Stud. Therm. Eng.* **2024**, *55*, 104143. [CrossRef]
88. Sharshir, S.W.; Joseph, A.; Elsharkawy, M.; Hamada, M.A.; Kandeal, A.; Elkadeem, M.R.; Thakur, A.K.; Ma, Y.; Moustapha, M.E.; Rashad, M.; et al. Thermal energy storage using phase change materials in building applications: A review of the recent development. *Energy Build.* **2023**, *285*, 112908. [CrossRef]
89. Kalnæs, S.E.; Jelle, B.P. Phase change materials and products for building applications: A state-of-the-art review and future research opportunities. *Energy Build.* **2015**, *94*, 150–176. [CrossRef]
90. Gao, Y.; Meng, X. A comprehensive review of integrating phase change materials in building bricks: Methods, performance and applications. *J. Energy Storage* **2023**, *62*, 106913. [CrossRef]
91. Elghamry, R.; Hassan, H. Impact a combination of geothermal and solar energy systems on building ventilation, heating and output power: Experimental study. *Renew. Energy* **2020**, *152*, 1403–1413. [CrossRef]

92. Krishnan, H.H.; Ashin, K.; Muhammed, A.A.; Ayalur, B.K. Experimental and numerical study of wind tower integrated with solar heating unit to meet thermal comfort in buildings during cold and sunny climate conditions. *J. Build. Eng.* **2023**, *68*, 106048. [CrossRef]
93. Krishnan, H.H.; Jadhav, N.; Ashin, K.; Ayalur, B.K. Experimental investigation of dynamic wind tower augmented with solar heating unit for improved thermal comfort in buildings during cold conditions. *Build. Environ.* **2023**, *245*, 110882. [CrossRef]
94. Li, J.; Zhang, Y.; Yue, T. A new approach for indoor environment design of passive solar buildings in plateau areas. *Sustain. Energy Technol. Assess.* **2024**, *63*, 103669. [CrossRef]
95. Wu, W.; Skye, H.M.; Domanski, P.A. Selecting HVAC systems to achieve comfortable and cost-effective residential net-zero energy buildings. *Appl. Energy* **2018**, *212*, 577–591. [CrossRef]
96. Hwang, Y.J.; Jeong, J.W. Energy saving potential of radiant floor heating assisted by an air source heat pump in residential buildings. *Energies* **2021**, *14*, 1321. [CrossRef]
97. Kılkış, B. Exergy-Optimum coupling of radiant panels with heat pumps for minimum CO_2 emission responsibility. *Energy Convers. Manag. X* **2023**, *20*, 100439. [CrossRef]
98. Kim, E.J. Thermal Comfort and Energy Consumption: Evaluating Modern HVAC Solutions. *J. Innov. Technol.* **2024**, *7*.
99. Wu, F.; Alkandari, S.; Ma, J.; Dhillon, P.; Liu, H.; Braun, J.E.; Karava, P.; Ziviani, D.; Horton, W.T. Wall-embedded micro heat pump for radiant heating in buildings: Evaluation of energy and thermal comfort performance. *Energy Build.* **2024**, *310*, 114075. [CrossRef]
100. Liu, X.; Lee, S.; Bilionis, I.; Karava, P.; Joe, J.; Sadeghi, S.A. A user-interactive system for smart thermal environment control in office buildings. *Appl. Energy* **2021**, *298*, 117005. [CrossRef]
101. Brainard, G.C.; Hanifin, J.P.; Greeson, J.M.; Byrne, B.; Glickman, G.; Gerner, E.; Rollag, M.D. Action spectrum for melatonin regulation in humans: Evidence for a novel circadian photoreceptor. *J. Neurosci.* **2001**, *21*, 6405–6412. [CrossRef]
102. Bianchi, E.; Bencharit, L.Z.; Murnane, E.L.; Altaf, B.; Douglas, I.P.; Landay, J.A.; Billington, S.L. Effects of architectural interventions on psychological, cognitive, social, and pro-environmental aspects of occupant well-being: Results from an immersive online study. *Build. Environ.* **2024**, *253*, 111293. [CrossRef]
103. Dai, Q.; Cai, W.; Shi, W.; Hao, L.; Wei, M. A proposed lighting-design space: Circadian effect versus visual illuminance. *Build. Environ.* **2017**, *122*, 287–293. [CrossRef]
104. Dai, Q.; Huang, Y.; Hao, L.; Lin, Y.; Chen, K. Spatial and spectral illumination design for energy-efficient circadian lighting. *Build. Environ.* **2018**, *146*, 216–225. [CrossRef]
105. Hosseini, S.M.; Mohammadi, M.; Schröder, T.; Guerra-Santin, O. Bio-inspired interactive kinetic façade: Using dynamic transitory-sensitive area to improve multiple occupants' visual comfort. *Front. Archit. Res.* **2021**, *10*, 821–837. [CrossRef]
106. Ahuja, A.; Mosalam, K.M. Evaluating energy consumption saving from translucent concrete building envelope. *Energy Build.* **2017**, *153*, 448–460. [CrossRef]
107. Tahwia, A.M.; Abdelaziz, N.; Samy, M.; Amin, M. Mechanical and light transmittance properties of high-performance translucent concrete. *Case Stud. Constr. Mater.* **2022**, *17*, e01260. [CrossRef]
108. Lyu, Q.; Dai, P.; Chen, A. Mechanical strengths and optical properties of translucent concrete manufactured by mortar-extrusion 3D printing with polymethyl methacrylate (PMMA) fibers. *Compos. B Eng.* **2024**, *268*, 111079. [CrossRef]
109. Losonczi, A. Building Block Comprising Light Transmitting Fibres and a Method for Producing the Same. U.S. Patent US8091315B2, 10 January 2012.
110. Su, X.; Zhang, L.; Liu, Z. Daylighting and energy performance of the combination of optical fiber based translucent concrete walls and windows. *J. Build. Eng.* **2023**, *67*, 105959. [CrossRef]
111. Zhong, W.; Schröder, T.; Bekkering, J. Biophilic design in architecture and its contributions to health, well-being, and sustainability: A critical review. *Front. Archit. Res.* **2022**, *11*, 114–141. [CrossRef]
112. D'Alessandro, F.; Asdrubali, F.; Mencarelli, N. Experimental evaluation and modelling of the sound absorption properties of plants for indoor acoustic applications. *Build. Environ.* **2015**, *94*, 913–923. [CrossRef]
113. Latini, A.; Torresin, S.; Oberman, T.; Di Giuseppe, E.; Aletta, F.; Kang, J.; D'Orazio, M. Virtual reality application to explore indoor soundscape and physiological responses to audio-visual biophilic design interventions: An experimental study in an office environment. *J. Build. Eng.* **2024**, *87*, 108947. [CrossRef]
114. Eşmebaşı, M.; Lau, S.K. Traffic Sounds in Office Spaces: PLS-SEM Study on Audio-Visual Perception with Open or Closed Windows and Biophilic Design. *Build. Environ.* **2024**, *264*, 111915. [CrossRef]
115. Fang, C.F.; Ling, D.L. Guidance for noise reduction provided by tree belts. *Landsc. Urban Plan.* **2005**, *71*, 29–34. [CrossRef]
116. Van Renterghem, T.; Forssén, J.; Attenborough, K.; Jean, P.; Defrance, J.; Hornikx, M.; Kang, J. Using natural means to reduce surface transport noise during propagation outdoors. *Appl. Acoust.* **2015**, *92*, 86–101. [CrossRef]
117. Lacasta, A.; Penaranda, A.; Cantalapiedra, I.; Auguet, C.; Bures, S.; Urrestarazu, M. Acoustic evaluation of modular greenery noise barriers. *Urban For. Urban Green.* **2016**, *20*, 172–179. [CrossRef]

118. Gush, M.B.; Blanuša, T.; Chalmin-Pui, L.S.; Griffiths, A.; Larsen, E.K.; Prasad, R.; Redmile-Gordon, M.; Sutcliffe, C. Environmental horticulture for domestic and community gardens—An integrated and applied research approach. *Plants People Planet* **2024**, *6*, 254–270. [CrossRef]
119. Nardini, A.; Cochard, H.; Mayr, S. Talk is cheap: Rediscovering sounds made by plants. *Trends Plant Sci.* **2024**, *29*, 662–667. [CrossRef]
120. Kumar, S.; Lee, H.P. The present and future role of acoustic metamaterials for architectural and urban noise mitigations. *Acoustics* **2019**, *1*, 590–607. [CrossRef]
121. Kumar, S.; Aow, J.W.; Lee, H.P. Acoustical performance of ventilated aluminum T-slot columns-based sonic cage. *Appl. Acoust.* **2022**, *193*, 108779. [CrossRef]
122. Martínez-Sala, R.; Rubio, C.; García-Raffi, L.M.; Sánchez-Pérez, J.V.; Sánchez-Pérez, E.A.; Llinares, J. Control of noise by trees arranged like sonic crystals. *J. Sound Vib.* **2006**, *291*, 100–106. [CrossRef]
123. Van Renterghem, T.; Botteldooren, D.; Verheyen, K. Road traffic noise shielding by vegetation belts of limited depth. *J. Sound Vib.* **2012**, *331*, 2404–2425. [CrossRef]
124. Liu, Y.F.; Huang, J.K.; Li, Y.G.; Shi, Z.F. Trees as large-scale natural metamaterials for low-frequency vibration reduction. *Constr. Build. Mater.* **2019**, *199*, 737–745. [CrossRef]
125. Yang, W.; Moon, H.J. Effects of recorded water sounds on intrusive traffic noise perception under three indoor temperatures. *Appl. Acoust.* **2019**, *145*, 234–244. [CrossRef]
126. Abdalrahman, Z.; Galbrun, L. Audio-visual preferences, perception, and use of water features in open-plan offices. *J. Acoust. Soc. Am.* **2020**, *147*, 1661–1672. [CrossRef] [PubMed]
127. Lu, Y.; Tan, J.K.A.; Hasegawa, Y.; Lau, S.K. The interactive effects of traffic sound and window views on indoor soundscape perceptions in the residential area. *J. Acoust. Soc. Am.* **2023**, *153*, 972–989. [CrossRef]
128. Calarco, F.M.; Galbrun, L. Sound mapping design of water features used over road traffic noise for improving the soundscape. *Appl. Acoust.* **2024**, *219*, 109947. [CrossRef]
129. Yang, W.; Moon, H.J.; Kim, M.J. Perceptual assessment of indoor water sounds over environmental noise through windows. *Appl. Acoust.* **2018**, *135*, 60–69. [CrossRef]
130. Arenas, J.P.; Sakagami, K. Sustainable acoustic materials. *Sustainability* **2020**, *12*, 6540. [CrossRef]
131. Fridrichová, L.; Němeček, P.; Knížek, R.; Buczkowska, K.E. Opportunities to use textile waste for the production of acoustic panels. *Text. Res. J.* **2024**, *94*, 2667–2681. [CrossRef]
132. Segura, J.; Montava, I.; Juliá, E.; Gadea, J. Acoustic and thermal properties of panels made of fruit stones waste with coconut fibre. *Constr. Build. Mater.* **2024**, *426*, 136054. [CrossRef]
133. SheikhMozafari, M.J.; Taban, E.; Soltani, P.; Faridan, M.; Khavanin, A. Sound absorption and thermal insulation performance of sustainable fruit stone panels. *Appl. Acoust.* **2024**, *217*, 109836. [CrossRef]
134. Kobiela Mendrek, K.; Baczek, M.; Broda, J.; Rom, M.; Espelien, I.; Klepp, I. Acoustic performance of sound absorbing materials produced from wool of local mountain sheep. *Materials* **2022**, *15*, 3139. [CrossRef]
135. Beheshti, M.H.; Firoozi, A.; Jafarizaveh, M.; Tabrizi, A. Acoustical and Thermal Characterization of Insulating Materials Made from Wool and Sugarcane Bagasse. *J. Nat. Fibers* **2023**, *20*, 2237675. [CrossRef]
136. Hetimy, S.; Megahed, N.; Eleinen, O.A.; Elgheznawy, D. Exploring the potential of sheep wool as an eco-friendly insulation material: A comprehensive review and analytical ranking. *Sustain. Mater. Technol.* **2024**, *39*, e00812. [CrossRef]
137. Oliveira, M.A.; António, J. Animal-based waste for building acoustic applications: A review. *J. Build. Eng.* **2024**, *84*, 108430. [CrossRef]
138. Halashi, K.; Taban, E.; Soltani, P.; Amininasab, S.; Samaei, E.; Moghadam, D.N.; Khavanin, A. Acoustic and thermal performance of luffa fiber panels for sustainable building applications. *Build. Environ.* **2024**, *247*, 111051. [CrossRef]
139. Rezaieyan, E.; Taban, E.; Berardi, U.; Mortazavi, S.B.; Faridan, M.; Mahmoudi, E. Acoustic properties of natural fiber reinforced composite micro-perforated panel (NFRC-MPP) made from cork fiber and polylactic acid (PLA) using 3D printing. *J. Build. Eng.* **2024**, *84*, 108491. [CrossRef]
140. Salino, R.E.; Catai, R.E. A study of polyurethane waste composite (PUR) and recycled plasterboard sheet cores with polyurethane foam for acoustic absorption. *Constr. Build. Mater.* **2023**, *387*, 131201. [CrossRef]
141. Buratti, C.; Belloni, E.; Lascaro, E.; Lopez, G.A.; Ricciardi, P. Sustainable panels with recycled materials for building applications: Environmental and acoustic characterization. *Energy Procedia* **2016**, *101*, 972–979. [CrossRef]
142. Neri, M.; Levi, E.; Cuerva, E.; Pardo-Bosch, F.; Zabaleta, A.G.; Pujadas, P. Sound absorbing and insulating low-cost panels from end-of-life household materials for the development of vulnerable contexts in circular economy perspective. *Appl. Sci.* **2021**, *11*, 5372. [CrossRef]
143. Rendy Abdillah, M.; Mavrogianni, A. The impact of regenerative design solutions on indoor temperature and daylight access in a medium-rise residential building in a tropical city-A case study in Jakarta, Indonesia. In Proceedings of the 13th Masters Conference: People and Buildings, London, UK, 16 September 2024. [CrossRef]

144. *ANSI/ASHRAE Standard 55-2023*; Thermal Environmental Conditions for Human Occupancy. ASHRAE: Peachtree Corners, GA, USA, 2023.
145. Petrovski, A.A.; Pauwels, E.; González, A.G. Implementing regenerative design principles: A refurbishment case study of the first regenerative building in spain. *Sustainability* **2021**, *13*, 2411. [CrossRef]
146. Mouton, L.; Allacker, K.; Röck, M. Bio-based building material solutions for environmental benefits over conventional construction products–Life cycle assessment of regenerative design strategies (1/2). *Energy Build.* **2023**, *282*, 112767. [CrossRef]
147. Mouton, L.; Trigaux, D.; Allacker, K.; Röck, M. Low-tech passive solar design concepts and bio-based material solutions for reducing life cycle GHG emissions of buildings–Life cycle assessment of regenerative design strategies (2/2). *Energy Build.* **2023**, *282*, 112678. [CrossRef]
148. Sah, A.K.; Hong, Y.M. Circular Economy Implementation in an Organization: A Case Study of the Taiwan Sugar Corporation. *Sustainability* **2024**, *16*, 7865. [CrossRef]
149. *BS 8001:2017*; Framework for Implementing the Principles of the Circular Economy in Organizations. British Standards Institution: London, UK, 2017.
150. Gardner, G.T.; Prugh, T.; Renner, M. *Can a City be Sustainable?* Island Press: Washington, DC, USA, 2016. [CrossRef]
151. FasterCapital. The Role of Green Building Practices in Modern Architecture. 2024. Available online: https://www.fastercapital.com/content/Integrating-Green-Building-Standards-in-Construction.html (accessed on 26 December 2024).
152. Hammond, V. Utilizing Biomimicry to Design Sustainable Architecture. Undergraduate Honors Theses. 2024. Available online: https://scholarworks.uark.edu/archuht/71 (accessed on 26 December 2024).
153. WOHA Architects. 50/50 City. 2020. Available online: https://woha.net/project/50-50-city/ (accessed on 26 December 2024).
154. State of Green. Denmark's First Circular Social Housing Project. 2021. Available online: https://stateofgreen.com/en/solutions/denmarks-first-circular-social-housing-project/ (accessed on 26 December 2024).
155. Haselsteiner, E.; Rizvanolli, B.V.; Villoria Sáez, P.; Kontovourkis, O. Drivers and barriers leading to a successful paradigm shift toward regenerative neighborhoods. *Sustainability* **2021**, *13*, 5179. [CrossRef]
156. Falanga, R.; Nunes, M.C. Tackling urban disparities through participatory culture-led urban regeneration. Insights from Lisbon. *Land Use Policy* **2021**, *108*, 105478. [CrossRef]

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.