

Supplementary Data for “A Simplified and Robust Surface Reflectance Estimation Method (SREM) for use over Diverse Land Surfaces using Multi-Sensor Data

Muhammad Bilal ^{1,†}, Majid Nazeer ^{2,3,†}, Janet E. Nichol ⁴, Max P. Bleiweiss ⁵, Zhongfeng Qiu ^{1,*}, Evelyn Jäkel ⁶, James R. Campbell ⁷, Luqman Atique ⁸, Xiaolan Huang ¹ and Simone Lolli ^{9,10}

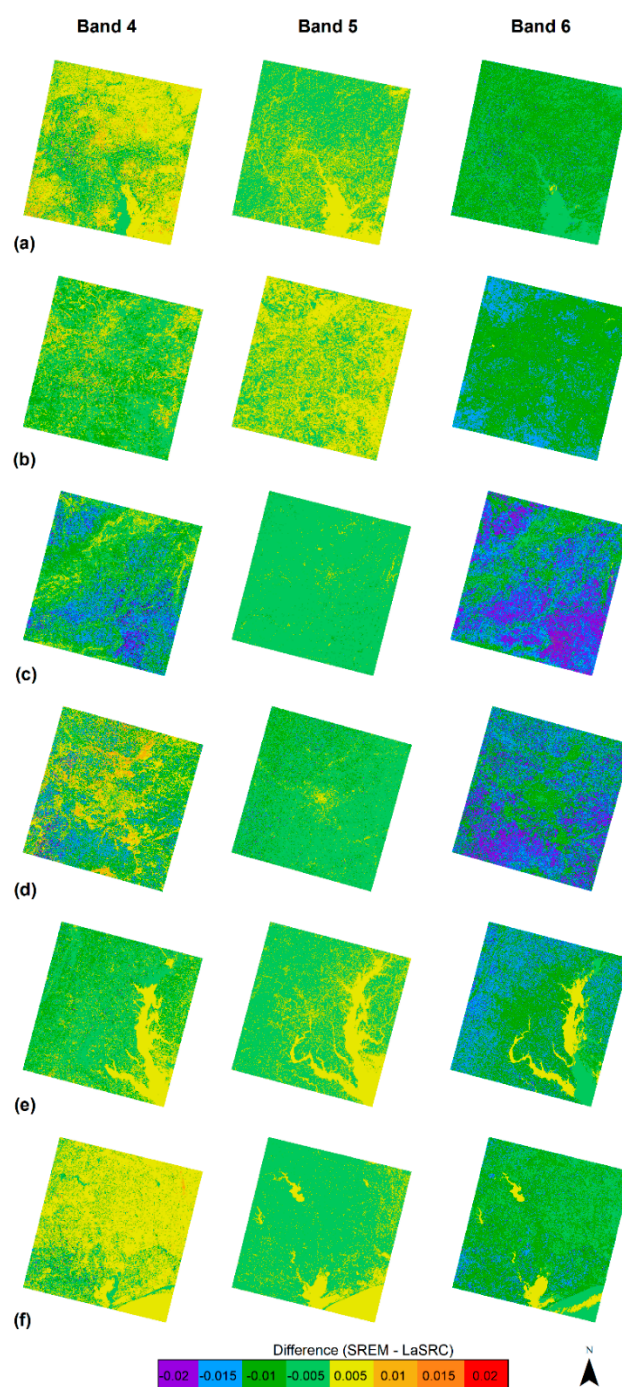


Figure S1. A spatial difference map between SREM and LaSRC corrected images for different path/rows including (a) 122/44, (b) 170/78, (c) 201/32, (d) 199/26, (e) 15/33 and (f) 25/39. The color bar represents the spatial differences between -0.02 and +0.02.

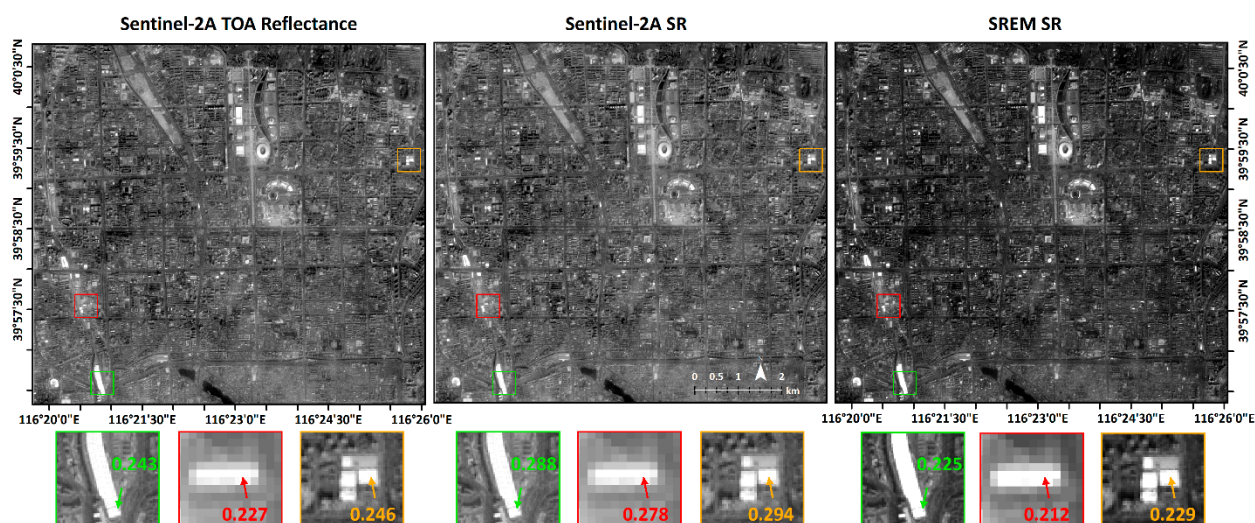


Figure S2. Map shows the “under-correction” of Sentinel-2A SR data over bright surfaces compared to the SREM SR data, i.e., Sentinel-2A SR values are greater than the TOA reflectance. No stretch/contrast is applied to the images.



© 2019 by the author. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).