



Impact of Suspended Solids and Organic Matter on Chlorine and UV Disinfection Efficiency of Greywater

Eran Friedler 1, Diana F. Chavez 2, Yuval Alfiya 1, Yael Gilboa 1 and Amit Gross 2,*

Supplementary Materials

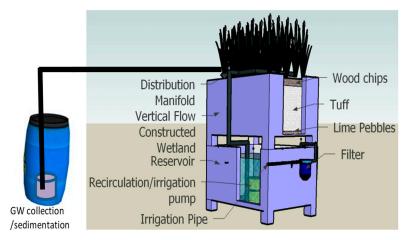


Figure S1. Schematic of the onsite recirculating vertical flow-constructed wetlands (RVFCW) GW treatment system (After Alfiya et al., 2013).




Figure S2. Trojan UV collimated beam system excluding the shutter. **a)** UV lamp, **b)** collimated beam, **c)** Radiometer, and **d)** water sample with magnetic bar on the stirrer.