

Phosphorus Inactivation in Lake Sediments Using Calcite Materials and Controlled Resuspension—Mechanism and Efficiency

Agnieszka Bańkowska-Sobczak ^{1,*}, Aurelia Blazejczyk ², Elisabeth Eiche ³, Uwe Fischer ⁴ and Zbigniew Popek ¹

¹ Department of Hydraulic Engineering and Applied Geology, Institute of Environmental Engineering, Warsaw University of Life Sciences–SGGW, Nowoursynowska 159 St., 02-776 Warsaw, Poland; zbigniew_popek@sggw.pl

² Department of Mechanics and Building Structures, Institute of Civil Engineering, Warsaw University of Life Sciences–SGGW, Nowoursynowska 159 St., 02-776 Warsaw, Poland; aurelia_blazejczyk@sggw.pl

³ Institute of Applied Geosciences, Karlsruhe Institute of Technology (KIT), Adenauerring 20b, Karlsruhe 76131, Germany; elisabeth.eiche@kit.edu

⁴ Lhoist Germany Rheinkalk GmbH, Am Kalkstein 1, Wülfrath 42489, Germany; uwe.fischer@lhoist.com

* Correspondence: agnieszka_bankowska@sggw.pl

Table S1. Composition of ground calcite, all values in % (manufacturer's data).

CaO	MgO	Fe ₂ O ₃	Al ₂ O ₃	SiO ₂
55.03	0.32	0.16	0.14	0.21

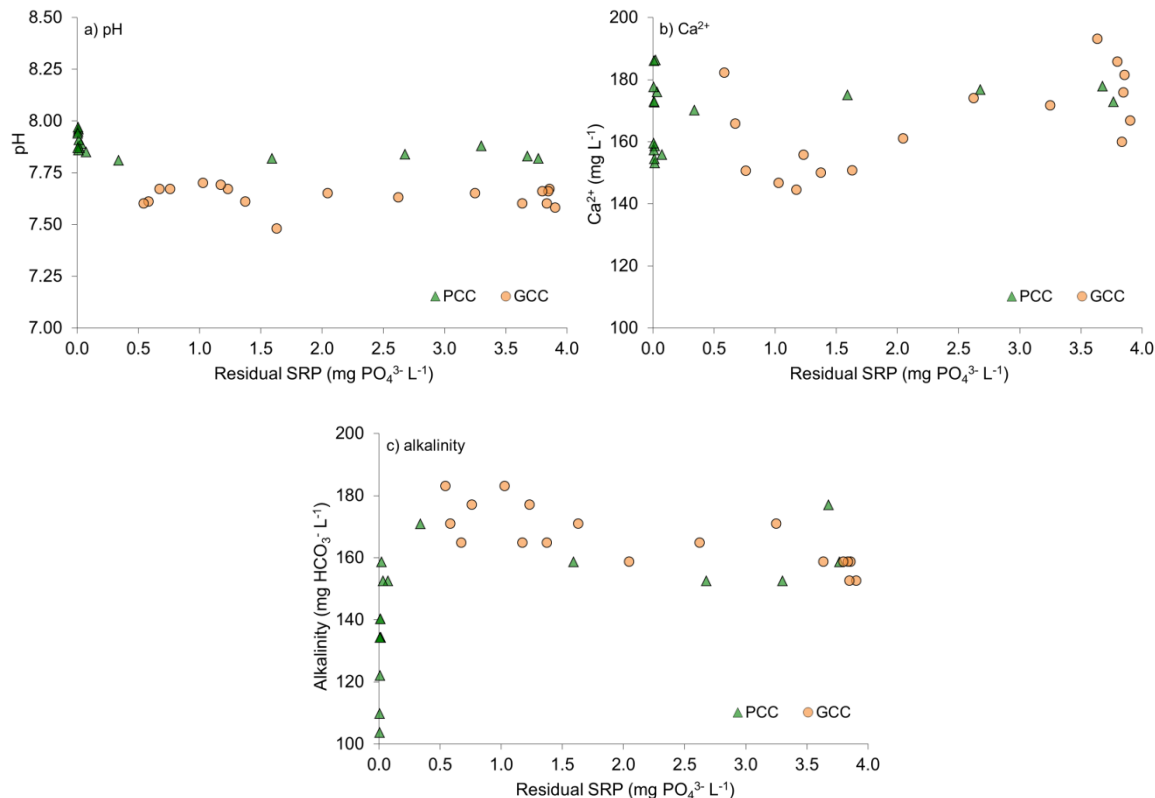


Figure S1. Physio-chemical conditions in the pore water after equilibration with PCC and GCC for 24 h: (a) pH, (b) Ca²⁺, (c) alkalinity.