



Correction


Correction: Tamadon, A.; et al. Internal Material Flow Layers in AA6082-T6 Butt-Joints during Bobbin Friction Stir Welding. *Metals* 2019, 9, 1059

Abbas Tamadon ^{1,*}, Dirk J. Pons ¹, Don Clucas ¹ and Kamil Sued ²

- Department of Mechanical Engineering, University of Canterbury, Christchurch 8140, New Zealand; dirk.pons@canterbury.ac.nz (D.J.P.); don.clucas@canterbury.ac.nz (D.C.)
- Fakulti Kejuruteraan Pembuatan, Universiti Teknikal Malaysia Melaka, Durian Tunggal 76100, Malaysia; kamil@utem.edu.my
- * Correspondence: abbas.tamadon@pg.canterbury.ac.nz; Tel.: +64-021-0281-2680

In the original publication [1], there was a mistake in Figure 10d as published. The ultrafine-grained microstructure (Figure 10d) was shown for the wrong sample (same grade of AA6082-T6 aluminium, different thickness, under different welding parameters). This was caused by an incorrect image being included in the assembly of images (from Figure 3b in our paper [2], which is not in error).

We have gone back to the sample, repolished, re-etched, and retaken the image. Hence, the following correction needs to be made to Figure 10. The corrected Figure 10d appears below.

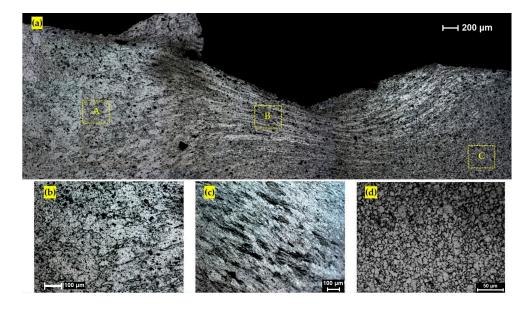



check for updates

Citation: Tamadon, A.; Pons, D.J.; Clucas, D.; Sued, K. Correction: Tamadon, A.; et al. Internal Material Flow Layers in AA6082-T6 Butt-Joints during Bobbin Friction Stir Welding. *Metals* 2019, 9, 1059. *Metals* 2024, 14, 255. https://doi.org/10.3390/ met14030255

Received: 29 March 2021 Accepted: 29 January 2024 Published: 21 February 2024




Copyright: © 2024 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

In the original publication, there was a mistake in Figure 3 as published. Figure 3 shows a photomontage of micrographs for the microstructures of the BFSW weld structure. These were shown for the wrong sample (same grade of AA6082-T6 aluminium, different thickness, under different welding parameters). This was caused by some incorrect images being included in the photomontage procedure (from Figure 4 in our paper [3], which is not in error).

We have gone back to the sample, repolished, re-etched, and retaken the images. Hence, the following correction needs to be made to Figure 3. The corrected Figure 3 appears below.

Metals **2024**, 14, 255 2 of 2

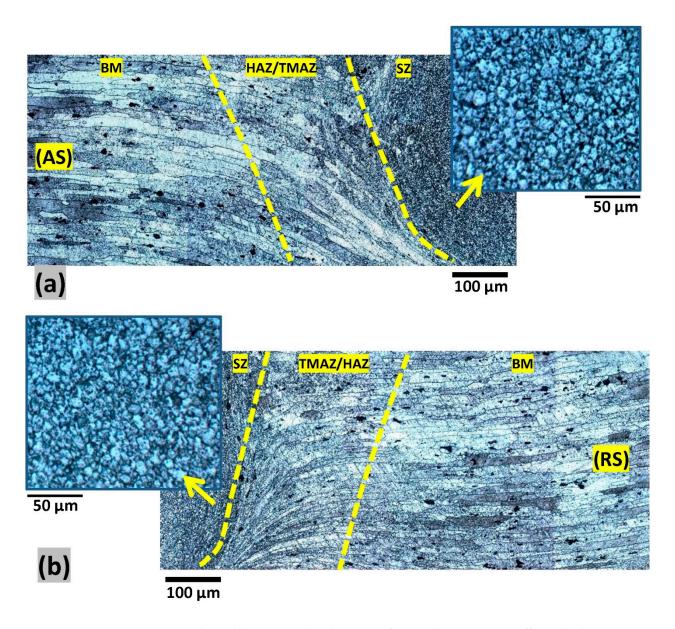

The authors state that the scientific conclusions are unaffected. This correction was approved by the Academic Editor. The original publication has also been updated.

References

- 1. Tamadon, A.; Pons, D.J.; Clucas, D.; Sued, K. Internal Material Flow Layers in AA6082-T6 Butt-Joints during Bobbin Friction Stir Welding. *Metals* **2019**, *9*, 1059. [CrossRef]
- 2. Tamadon, A.; Pons, D.J.; Sued, K.; Clucas, D. Thermomechanical Grain Refinement in AA6082-T6 Thin Plates under Bobbin Friction Stir Welding. *Metals* **2018**, *8*, 375. [CrossRef]
- 3. Tamadon, A.; Pons, D.J.; Sued, K.; Clucas, D. Development of Metallographic Etchants for the Microstructure Evolution of A6082-T6 BFSW Welds. *Metals* **2017**, *7*, 423. [CrossRef]

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.