

Article

Remediation of Aviation Kerosene-Contaminated Soil by Sophorolipids from *Candida bombicola* CB 2107

Torsha Goswami ^{1,2}, Filip M. G. Tack ^{2,*} , Lenka McGachy ¹  and Marek Šír ¹

¹ Department of Environmental Chemistry, University of Chemistry and Technology, Prague, Technická 5, 16628 Praha 6, Czech Republic; toyarosha@gmail.com (T.G.); Lenka.hokrova@vscht.cz (L.M.); marek.sir@vscht.cz (M.Š.)

² Department of Green Chemistry and Technology, Ghent University, Coupure Links 653, B-9000 Gent, Belgium

* Correspondence: filip.tack@ugent.be

Received: 30 December 2019; Accepted: 7 March 2020; Published: 13 March 2020



Abstract: Yeast-derived biosurfactants may substitute or complement chemical surfactants as green reagents to extract petroleum hydrocarbons from contaminated soil. The effectiveness of contaminant clean-up by sophorolipids was tested on kerosene-contaminated soil with reference to traditional synthetic surfactants. The sophorolipids produced by the yeast *Candida bombicola* CB 2107, cultivated with the carbon sources 10 g/L glucose and 10 g/L rapeseed oil, were most effective in contaminant removal. This biosurfactant revealed a critical micelle concentration of 108 mg/L which was close to that of Triton X-100 (103 mg/L), the synthetic surfactant considered as reference. It outperformed Triton X-100 in reducing kerosene concentrations (C10–C40) in contaminated soils. In a soil initially containing 1080 mg/kg of C10–C40, the concentration was reduced to 350 mg/kg using the biosurfactant, and to 670 mg/kg using Triton-X. In the soil with initial concentration of 472 mg/kg, concentrations were reduced to 285 and 300 mg/kg for biosurfactant and Triton X-100, respectively. Sophorolipids have the potential to replace synthetic surfactants. Properties and performance of the biosurfactants, however, strongly differ depending on the yeast and the growing conditions during production.

Keywords: petroleum hydrocarbons; yeast-derived biosurfactant; bioremediation

1. Introduction

Petroleum hydrocarbons are common environmental pollutants of concern. They contaminate soil and water primarily during oil spills and eventually enter the food web. Remediation of hydrocarbon-contaminated soils conventionally is achieved through biological degradation for moderate contamination, or through physico-chemical soil-washing techniques [1]. Surfactants aid in the removal of pollutants adsorbed to the soil by the stimulation of mass transport of these pollutants from the soil to the aqueous phase. This is achieved by the reduction of surface tension and micellar solubilisation, emulsification of liquid pollutant and facilitated transport [2]. Due to the adsorption of the molecules of surfactants on the soil contaminant surface, a repulsion occurs between the head groups of the surfactants and the soil particles. This facilitates the removal of contaminant molecules from the soil surface in extractive soil remediation [3,4].

Regulations increasingly restrict the use of chemical agents for soil/water recovery [5], favouring more sustainable green remediation approaches. The natural biodegradation of hydrocarbons in soil has been reported to be remarkably enhanced by the in situ production of biosurfactants derived from soil microorganisms or their addition [2,6]. Biosurfactants may be used as surface-active soil-cleaning agents that are more environmentally friendly for physico-chemical soil washing.

A variety of bacteria, yeast and filamentous fungi produce amphiphilic biological compounds, known as biosurfactants, extracellularly or as part of their cell membrane [7–10]. They can be of low molecular weight such as glycolipids or lipopeptides, or of high molecular weight such as exocellular polymeric surfactants. The latter include polysaccharides, lipopolysaccharides, proteins, lipoproteins or complexes of these biopolymers [11]. Sophorolipids form a class of glycolipid biosurfactants isolated from non-pathogenic yeasts such as *Candida bombicola*. The non-pathogenic nature of sophorolipids and the very high yield of over 400 g/L that can be achieved nowadays is increasingly making it a more attractive alternative over petroleum-based surfactants [12,13]. The two yeasts most commonly studied for their ability to produce sophorolipids are *Candida bombicola* and *Candida lipolytica* [14]. The remarkable differences between structural classes of sophorolipids are the basis of the wide variation in their physicochemical properties. For example, the sophorolipids synthesized by *Candida bombicola* actually are a mixture of related molecules with different chain length, saturation and hydroxylation in the fatty acid part and different patterns of lactonisation and acetylation [12]. These compounds are readily biodegradable and have low cytotoxicity levels [15], properties that are very favourable for application in soil contaminant remediation.

At present, the expenses associated with biosurfactant-based soil remediation are high. Production cost of sophorolipids are in the 2–5 €/kg range, which is higher than that of ethoxylate or alkyl polyglycoside (US\$ 1–3/kg) [16]. The cost of biosurfactant production has to be brought down to £1.70/L to outperform chemical surfactants in the market [17]. More economical ways of biosurfactant production must be explored, as this is the primary hurdle in the way of their commercialisation. Until now, rhamnolipids and surfactin, a cyclic lipopeptide, are the only commercially available biosurfactants [18]. Cheaper substrates such as dairy and distillery wastes, and sugarcane molasses, could be used for the biosurfactant production process. Also recycling of surfactants is considered to reduce the overall costs of remediation [19]. In the year 2012, the total production of surfactants was approximately 12 million tons, of which biosurfactant production had a share of 3.5 million tons [20]. Patents for some biosurfactant producing microorganisms such as *Candida bombicola* ATCC2214, have also been issued in recent years [21]. This shows the growing significance of the commercial application of biosurfactants. Significant biotechnological advances in biosurfactant technology can bring down the production costs and, thereby, support large-scale production [16].

The focus of this research is on application of biosurfactants, in particular sophorolipids, in the remediation of soil contaminated with petroleum hydrocarbons. This study examines the potential of sophorolipids for extractive cleaning of oil contaminated soils, with reference to conventional synthetic surfactants. Sophorolipids were produced using yeasts, *Candida* and *Yarrowia*, grown in different conditions. Surface active properties of the resulting biosurfactants were tested, and selected products were explored for their efficacy in solubilizing aviation kerosene from contaminated soil. The principal objectives were (i) to perform a comparative study between synthetic surfactants and biosurfactants in terms of their effectiveness to remediate soil contaminated with petroleum hydrocarbons, (ii) to study the residual organic contamination in the test soils after soil washing, and (iii) to observe the influence of yeast cultivation conditions on hydrocarbon remediation.

2. Materials and Methods

2.1. Materials

2.1.1. Surfactants and Chemicals Used

Non-ionic synthetic surfactants, Triton X-100, Tween 80 and Brij 58, were purchased from Sigma-Aldrich, Inc. They were laboratory grade and storable at room temperature. Triton X-100 is characterised by a polyethylene oxide chain as its hydrophilic group and an aromatic hydrocarbon as its hydrophobic group. Tween 80 is a mixture of polyoxyethylene ethers and has emulsifier properties, whereas Brij 58 is polyethylene glycol hexadecyl ether.

Biosurfactants were obtained by cultivation of two strains of non-pathogenic sophorolipid-producing yeasts in different conditions. *Yarrowia lipolytica* was isolated from a crude oil lagoon in the southern Czech Republic by EPS biotechnology s.r.o. (Kunovice, Czech Republic) *Candida bombicola* CB 2107 was purchased from the AV ČR, Czech Academy of Sciences (Prague, Czech Republic). They were cultured on mineral medium, with the addition of different concentrations of polar (glucose) and nonpolar (rapeseed oil) carbon sources and yeast extract as a nitrogen source, to produce 8 different sophorolipid samples (Table 1).

Table 1. Substrates involved in the production of the sophorolipids.

BS ¹	Producer Yeast	Glucose (g/L)	Rapeseed Oil (g/L)	Place of Growth	Yield (g/L) ²
A	<i>Candida bombicola</i> CB 2107	1	1	E. Flask ³	0.2
B	<i>Yarrowia lipolytica</i>	10	10	E. Flask	1.3
C	<i>Yarrowia lipolytica</i>	10	10	Auto. bio. ⁴	ND
D	<i>Yarrowia lipolytica</i>	1	1	E. Flask	1.2
E	<i>Yarrowia lipolytica</i>	10 ⁵	10	E. Flask	5.2
F	<i>Yarrowia lipolytica</i>	0 ⁶	10	E. Flask	0.1
G	<i>Yarrowia lipolytica</i>	10 ⁵	10	Auto. bio.	ND
H	<i>Candida bombicola</i> CB 2107	10	10	E. Flask	3.9

¹ Biosurfactants. ² Yield of biosurfactant in g/L cultivation solution. ³ Erlenmeyer Flask. ⁴ Automatic Bioreactor. ⁵ 1 g/L additional nitrogen source added. ND—not determined.

To produce the sophorolipids, yeast strains were sub-cultured from agar malt extract to mineral medium (Table 2) along with Difco™ Yeast Nitrogen Base (BD Biosciences, Heidelberg, Germany) and 10 g/L of rapeseed oil. The cultures were kept on an orbital shaker (WiseShake SHO-2D, Witeg Labortechnik GmbH, Wertheim, Germany) at 120 rpm (rotation per minute) for 4 days at room temperature. Yeast from these cultures were inoculated again in the mineral medium (1.8×10^5 cfu/mL for *Candida bombicola* and 4.3×10^5 cfu/mL for *Yarrowia lipolytica*) and cultured for 4 days at room temperature in a bioreactor (Bioscreen Testing Service, Inc., Torrance, CA, USA) with automatic temperature and pH control. The preculture was incubated for 7 days.

Table 2. Composition of the mineral medium, pH 6.5.

Primary Chemicals	Amount (g/L)	Trace Elements	Amount (mg/L)
K ₂ HPO ₄	0.17	MnCl ₂ ·4H ₂ O	1.00
KH ₂ PO ₄	0.13	CaCl ₂ ·2H ₂ O	0.26
(NH ₄) ₂ SO ₄	0.71	FeSO ₄ ·7H ₂ O	0.60
MgCl ₂ ·6H ₂ O	0.34	Na ₂ MoO ₄ ·2H ₂ O	2.00
YNB ¹	1.17		

¹ Difco™ Yeast Nitrogen Base.

Cultivation of the obtained yeast was continued for 168 h in mineral medium containing a non-polar (vegetable oil) and a polar (glucose) carbon source in different ratios (Table 1) at 20 °C temperature. Shaking was performed on a planar shaker at 120 rpm. The pH was 6, and the oxygen saturation was about 76% throughout the cultivation.

The biosurfactants were isolated from the growing media using protocols described before [22–24]. After dispersion in an ultrasonic water bath for 15 min, the production medium was subjected to triple extraction during each 10 min using ethyl acetate (p.a. grade, Penta s.r.o., Prague, Czech Republic). The default volume ratio of ethyl acetate to aqueous phase was 1:2, but was increased to 3:1 for treatments with poorly separable emulsions. After each extraction step, the organic phase was transferred to a rotary vacuum evaporator flask to separate the crude surfactant from the ethyl acetate phase. Then, the mixture was transferred to a Petri dish and the residual ethyl acetate was left to evaporate at room temperature under the fume hood. Depending on the conditions of pre-treatment of the production medium, the crude surfactant was contaminated with some oil, which was removed by a hexane wash.

Pure product was formed as deposits on the petridish walls, or in the form of crystals or gel at the bottom of the dish.

Sodium sulphate (Na_2SO_4), n-heptane, acetone, pentane and methanol were provided by Penta s.r.o., Prague, Czech Republic. Florisil and 2,3,5-triphenyl tetrazolium chloride (TTC) were provided by Sigma-Aldrich Chemie GmbH, Darmstadt, Germany. All the chemicals were laboratory grade.

2.1.2. Kerosene-Contaminated Soil

Kerosene-contaminated soil was sampled from the north-western part of the area surrounding the former airbase in the Hradčany district of Czech Republic near Mimoň. During the years 1940–1989, there were frequent incidents of accidental oil spills which resulted in contamination of soil with different types of fuels, most frequently aviation kerosene. A core of the contaminated soil was sampled at different depths using a stainless steel drill sampler for loose matrices. The soil was sandy and dry from the surface to about 1.5 m depth. Then, it was a mix of mildly wet sand and clay between 1.5–2.5 m. Soil from 2.5 m onwards was completely water-saturated and predominantly clayey. In total, 11 depths were sampled. Three of them were analysed for soil properties (Soil 7: 2.2–2.5 m; Soil 10: 2.8–3 m and Soil 11: 3–3.1 m). Soil 7 and 11 were selected for the kerosene extraction experiment.

2.2. Kerosene Extraction Experiments

In a solubilisation test, the capability of the surfactants to keep kerosene in suspension was tested. To 25 mL of 500 mg/L surfactant solution or distilled water (blank) in a 100 mL Erlenmeyer flasks, 100 μL kerosene was added. The flasks were sealed and shaken at 100 rpm for 3 h on a digital orbital shaker (WiseShake SHO-2D, Witeg Labortechnik GmbH, Wertheim, Germany), after which 15 mL of solution was sampled for kerosene analysis (see Section 2.3.4).

Tests to remove kerosene from field-contaminated Hradčany soil involved the surfactants Triton X-100, Tween-80 and the sophorolipids A, B, C, F, H, and samples 7 and 11 of the Hradčany soil. A suspension of 10 g soil and 50 mL 500 mg/L surfactant solution was shaken for 1 h at 100 rpm. Resulting suspensions were very turbid and were allowed to settle during 24 h before analysis of kerosene content (see Section 2.3.4).

2.3. Characterisation and Chemical Analysis

2.3.1. Surfactant Characteristics

Surface tension was determined according to the ring-tearing method [25,26] with a tensiometer (K6, Kruss GmbH, Hamburg, Germany) at room temperature. Synthetic surfactants and dilutions of sophorolipid samples A–H (10, 50, 100, 250 and 500 mg/L) were tested. Purified surfactants were dissolved in demineralized water to achieve appropriate concentrations of the required surfactant solutions. A graph of surfactant concentrations against corresponding surface tension values was plotted to derive the CMC for each surfactant [27]. CMC (mg/L) was determined as the point where the progressive decrease in surface tension changes to a constant value by estimating regression lines for each of the sections using linear regression and determining their intersection point [28].

In an oil-spreading experiment [29], 20 mL of distilled water and 20 μL kerosene were added into a 10 cm Petri dish. Then, 200 μL surfactant (500 mg/L) was slowly added. The diameter of the clearing zone reflected the surfactant activity. Emulsion activity was determined according to a published procedure [30] with some modifications. A volume of 0.5 mL of oil substrates was added to 2 mL of surfactant solution (500 mg/L), and the mixture was vortexed (IKA Vortex Genius3, Fisher Scientific, Schwerte, Germany) at full speed for 2 min. The height of the emulsion layer and the total height, i.e., the sum of height of oil layer, emulsion layer and aqueous layer were measured after keeping the test tubes undisturbed for 24 h. The emulsion index (E_{24}) was calculated as the ratio between these two measures [31].

2.3.2. Soil Properties

To determine porosity, a volume of 20 mL dry soil was measured in a 50 mL test tube. Distilled water was added cautiously until the soil was saturated with water. The final volume of distilled water required for the complete saturation of soil was recorded. Soil porosity was calculated as the ratio between the volume of water required to saturate the soil and the soil volume. Soil pH was determined in an extract of 5 mL soil in 30 mL distilled water, which was vigorously shaken for 5 min and then left undisturbed for 2 h. pH was measured at 25 °C using a digital pH meter (GMH 3530, Greisinger Electronic, Regenstauf, Germany) [32].

2.3.3. Kerosene Extraction from Contaminated Soil

To 10 g soil in glass bottles with stoppers, 20 mL acetone followed by 10 mL heptane were added. The bottles were thoroughly shaken after each addition. The sample was placed in an ultrasonic water bath (PSO4000A, Labio, Prague, Czech Republic) for 15 min and then left to settle. The supernatant solution was decanted into a borosilicate glass separator funnel and extracted two consecutive times with 50 mL of distilled water. The resulting emulsion was transferred to 30 mL glass vials and analysed for kerosene.

2.3.4. Kerosene Analysis

Kerosene was analysed by gas chromatography as the sum of the concentrations of the C10–C40 fractions. To 30 mL glass scintillation vials, 15 mL sample and 5 mL heptane were added. Vials were manually shaken for 10 min and left undisturbed for 1 h to allow the settling of phases. After 1 h, the extracted contaminant in heptane phase was transferred into fresh scintillation vials. After addition of 0.1 g Na₂SO₄ the mixture was hand shaken for 2 min. The Na₂SO₄ removes water and breaks emulsions, resulting in a clear supernatant. Subsequently, polar organic matter was removed by adding 0.1 g of Florisil, followed by manual shaking. A sample of the clear heptane phase was pipetted into 2 mL glass vials and analysed using a Master VH gas chromatograph (DANI Instruments, Cologno Monzese MI, Italy) equipped with a flame ionisation detector (FID) and a Rxi-5HT capillary column with dimensions (length, internal diameter and bead diameter) 15 m, 0.25 mm, 0.25 µm (Restek Corporation, Bellefonte, PA, USA). Conditions of GC analysis were as follows: splitless injection, injector temperature: 320 °C; temperature program: 50 °C for 2 min, 25 °C/min to 320 °C, hold 7.2 min; carrier gas: N₂, 25 mL/min; detector: temperature 330 °C; H₂—40 mL/min, air—280 mL/min.

2.3.5. Dehydrogenase Activity (DHA)

Dehydrogenase activity (DHA) is a measure for microbial activity and thus may reflect toxic effects. The four best-performing surfactants, Triton-X and the sophorolipids A, C and H were tested according to [33]. A dilution series of 250 mg/L, 500 mg/L, 1000 mg/L and 2000 mg/L was prepared for each of the selected surfactants. In total, 18 50-mL tubes were prepared (4 surfactants at 4 different concentrations, and 2 blanks (distilled water)). Dry, sieved garden soil from the vicinity of the VŠCHT campus (2 g) was weighed and transferred to each of the tubes. Then, 1 mL of the surfactant dilutions or distilled water were transferred to the tubes. To each tube, 1 mL of 2% TTC (2,3,5-triphenyl tetrazolium chloride) was added. The tubes were wrapped in foil paper and kept overnight. Microbial production of the enzyme dehydrogenase converts TTC to TPF (1,3,5-triphenyl formazan), which causes a red colour that is determined by photometry. After 24 h, 10 mL methanol was added to each of the tubes, shaken and left undisturbed for 1 min. The soil suspensions were then filtered using Whatman's filter paper, and absorbance at 482 nm was measured using a spectrophotometer (Cintra 101, GBC Scientific Equipment, Melbourne, Australia). Before measurement, the spectrophotometer was calibrated by

measuring the absorbance of methanol against a blank. All subsequent measurements were taken with the blank as reference. The DHA was calculated as:

$$a = \frac{(c_{\text{sample}} - c_{\text{blank}})V}{m} \times \frac{100}{DM\%} \times \frac{1}{t} \quad (1)$$

where a is dehydrogenase activity (mg/L), c_{sample} is the concentration of TPF in the sample (mg/L), c_{blank} is the concentration of TPF in the blank (mg/L), V is the total volume of solution (= volume of surfactant + volume of TTC + volume of methanol) (mL), m is the mass of soil (g), $DM\%$ is the dry matter content of the soil (% , mass based) and t is the time of incubation, 24 h. The DHA was expressed in mg/(g h).

3. Results and Discussion

3.1. Characteristics and Behaviour of the Tested Surfactants

A low surface tension favours micelle formation and subsequent solubilisation of the contaminant. The critical micelle concentration (CMC) indicates a minimum concentration of the surfactant at which the contaminant removal would become efficient. The biosurfactants A and H reduced the surface tension most strongly, to low values of 37 mN/m and below (Figure 1).

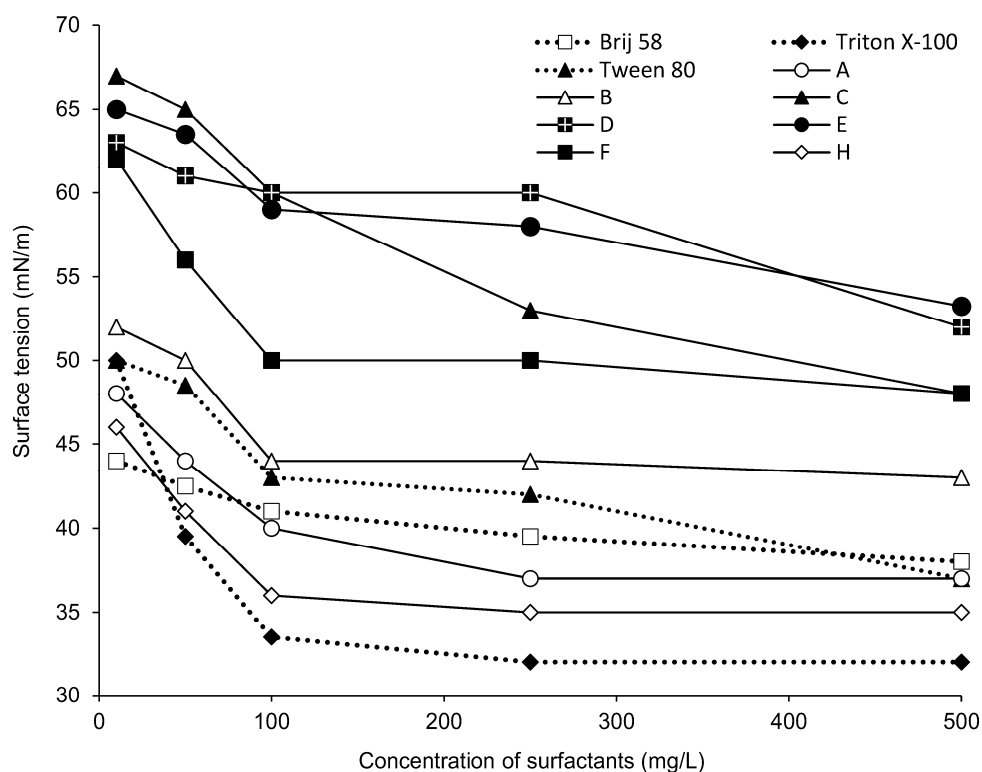


Figure 1. Surface tension (mN/m) as a function of surfactant concentrations (mg/L).

These values were in the range of those of the synthetic surfactants. For example, Triton X-100 revealed a minimum surface tension of 32 mN/m (Figure 1). This suggests that the effectiveness in contaminant clean-up of biosurfactants A and H potentially might be comparable with that of the synthetic surfactants. Surface tension for the biosurfactant G was, at about 65 mN/m, quite high compared to the surface tension for corresponding concentrations of the other surfactants. Accordingly, G was excluded from further tests. The CMC values for Triton X-100 (103 mg/L) and H (108 mg/L) were comparable. This finding was significant as Triton X-100 is known to be an effective surfactant for hydrocarbon remediation.

In the oil-spreading test, biosurfactant H gave a clear zone with a diameter of 7.6 cm, the largest among the biosurfactants tested and comparable to the 8 cm observed for Triton X-100 (Table 3). This suggests that H may be equally effective for oil removal as the synthetic detergent Triton X-100. C did not form a clear zone under the tested conditions.

Table 3. Clear zone diameter for oil spreading test in surfactant solutions (500 mg/L).

Surfactant	A	B	C	F	H	Tween 80	Triton X-100
Diameter (cm)	6.7	4	0	1.8	7.6	5	8

The emulsification index, E_{24} was determined for crude oil, besides kerosene, because the test soil had a contamination profile similar to C10–C40. With crude oil, the E_{24} values were comparable between the biosurfactants, with the highest value, at 18%, recorded for A. Triton X-100, in contrast, gave a quite low value of 5.9% (Table 4).

Table 4. Emulsification index E_{24} of different surfactants (500 mg/L solutions) tested with crude oil and kerosene.

Surfactant	A	B	C	F	H	Triton X-100	Tween 80	Control
E_{24} (%) with crude oil	17.7	15.7	15.7	13.7	13.7	5.9	13.7	15.7
E_{24} (%) with kerosene	4.4	2.1	2.1	1.1	4.3	22	6.1	4.4

For kerosene, the highest E_{24} (22%) was found for Triton X-100 whereas the biosurfactants A and H revealed considerably lower values of about 4.4%. This illustrates that the emulsification index markedly depends on the oil type. The emulsifying property of a surfactant is reflected in its foaming effect. A low surface tension favours foam formation, but does not necessarily guarantee a good response to other important features like solubilisation. There are other governing factors for the assessment of the surfactant interactions with the contaminant, such as molecular weight, micellar weight, shape of the micelles, etc.

3.2. Solubilisation Test and Soil-Washing Tests with Hradčany Soil

The capacity of a surfactant to retain hydrophobic hydrocarbon contamination in suspension is an important property for application in extractive soil cleaning or enhanced bioremediation. In the test in which all surfactants were employed in a concentration of 500 mg/L, biosurfactant H performed best, keeping 45 mg/L of kerosene (C10–C40) in emulsion. The synthetic surfactant performed second best, closely followed by biosurfactants A and B (Table 5). The weakest performing biosurfactant, E, kept only 30% in solution. The variability existing among the biosurfactants produced by *Yarrowia lipolytica* (B–F) emphasized the important influence of cultivation conditions on the quality of the produced sophorolipids.

Table 5. Aqueous solubility of kerosene (C10–C40) in solutions of the different surfactants (500 mg/L).

Surfactant	A	B	C	D	E	F	H	Triton X-100
c(C10–C40) (mg/L)	24	28	15	21	9	18	45	30

Properties of soil from the contaminated Hradčany site are given in Table 6. There was a clear decreasing trend in porosity with depth (Table 6). A decrease in porosity would make it more difficult for the surfactant to enter soil pores and remove the hydrophobic contaminants. Moreover, the initial concentrations of contaminants were higher at greater depths (Table 6). The predominantly clayey soil favoured increased adsorption and lesser diffusion of the hydrophobic contaminants.

Table 6. Properties of the tested soils samples.

	Soil 7	Soil 10	Soil 11
Depth (m)	2.2–2.5	2.8–3	3–3.1
Texture	sand/clay	clay	clay
Moisture content (% m/s)	10.4	14.5	16.0
pH (25 °C)	6.14	5.52	5.97
Porosity (% volume of pores)	38	25	25
Initial c(C10–C40) (mg/kg)	472	837	1081

Soil treatment with biosurfactant H resulted in maximum transfer of contaminants from the soil to the liquid phase (Figure 2a) and, accordingly, the lowest residual contaminant concentration in soil (Figure 2b). Overall, all selected biosurfactants were at least equally effective in contaminant removal as the synthetic surfactants. Washing with H reduced the C10–C40 concentration from 472 mg/kg to 283 mg/kg in sample 7, which corresponds to a reduction by approximately 40%. For soil 11, the reduction was from 1081 mg/kg to 350 mg/kg (approximately 68%). Next most efficient was Triton X-100, with a removal of 36% (from 472 mg/kg to 301 mg/kg) and 38% (from 1081 mg/kg to 673 mg/kg) from the solid phase of soils 7 and 11, respectively. The next best performing biosurfactants were F with 11% and 32% removal and A with 12% and 20% reduction, for soil 7 and soil 11 respectively.

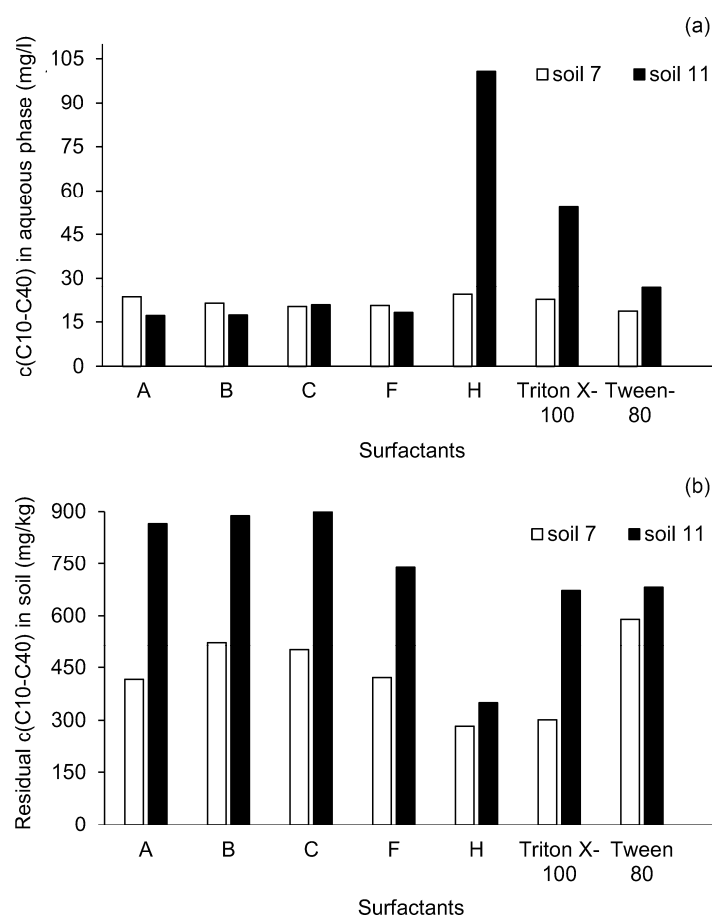


Figure 2. Kerosene, measured as c(C10–C40) in mg/L in aqueous phase for soil washing (for soil 7 and 11) with surfactants (a) and residual c(C10–C40) in soil (mg/kg) post-washing with surfactants (b). Initial c(C10–C40) of soils 7 and 11 were 472 mg/kg and 1080 mg/kg respectively.

Differences in contaminant removal efficiency could be related to the overall cultivation conditions and the producer yeast type. Biosurfactant H (*Candida bombicola* CB2107) produced in an Erlenmeyer

flask, with 10 g/L of glucose, 10 g/L of rapeseed oil and without any nitrogen source, performed best in contaminant removal among all the surfactants. To date, the most successful commercial application is that of *Candida bombicola* ATCC 22,214 as it produces more than 400 g/L sophorolipids [12]. A group of researchers investigated different properties of sophorolipids produced by *Candida bombicola*, including emulsifying activity, fat and oil solubilisation capacity and their stability at wide ranges of pH, salt concentrations and temperatures, and concluded that this biosurfactant has an important potential for environmental applications [34]. Biosurfactant A (also from *Candida bombicola* CB2107) cultivated with 1 g/L each of glucose and rapeseed oil, devoid of nitrogen source, was less effective in C10–C40 hydrocarbon remediation than H. Hence there could be an influence of concentration of carbon source on the remediation potential of biosurfactants. Despite identical production conditions as for H, biosurfactant B (*Yarrowia lipolytica*) was seen to be less efficient. Biosurfactant C, also by *Yarrowia lipolytica*, but grown in an automatic bioreactor, and the rest of the conditions being identical to H, also was less efficient than H. Clearly, both strain and production conditions significantly impact the potential efficiency of the produced biosurfactant for extractive soil cleaning. Although *Yarrowia*, among other yeasts isolated from petroleum-contaminated soil, was shown to be the major organism responsible for the degradation of hydrocarbon [35], novel research with different strains has been limited so far.

3.3. Dehydrogenase Activity

Toxicity of the surfactants is an important criterion when striving towards sustainable and environmentally friendly remediation techniques. The dehydrogenase activity (DHA) test did not reveal differences between the surfactants when tested using the Hradčany soil. This may be due to bad conditions for microbial activity in these deeper soil layers, with a lack of nutrients, except for the petroleum hydrocarbons as the carbon source. Therefore, the test was repeated with a biologically active garden soil.

Triton X-100 and biosurfactants A and C revealed an increase in DHA with an increase in surfactant concentrations (Figure 3). DHA activity for biosurfactant H, however, showed no trend. A direct interpretation of high DHA is that the surfactant is less toxic, hence safe for use. An alternative explanation might be that the activation of certain defence mechanisms caused microorganisms to convert TTC to TPF, which was detected as high DHA.

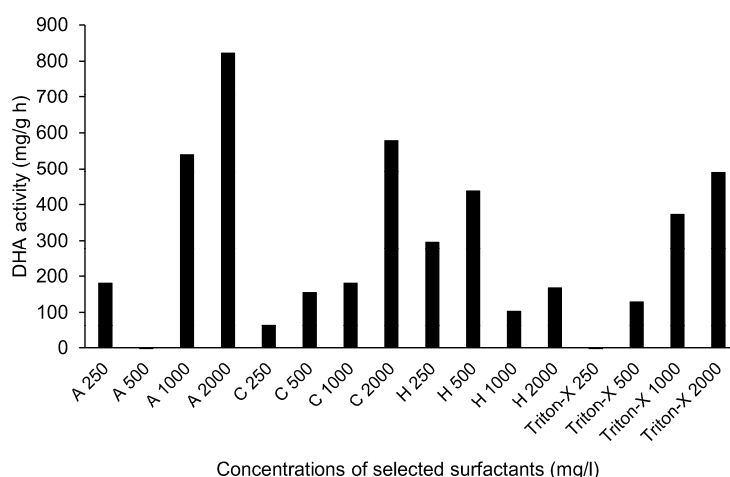


Figure 3. The dehydrogenase activity (DHA, mg/(g h)) of different concentrations (indicated by number in the label, mg/L) of surfactants (identified by letter in the label).

4. Conclusions

Some of the studied sophorolipids performed better than the synthetic detergent in solubilizing kerosene. The efficacy of sophorolipid H to extract hydrocarbons from contaminated soil was higher

than the synthetic surfactant Triton-X, used as reference. The performance of sophorolipids produced by the same yeast strain under different fermentation conditions differed greatly. More experiments should cover different soils and a range of hydrophobic contaminants or mixed contaminations. Future research should delve into the mechanisms behind the differences in performance, and link this to properties and structural features of the produced sophorolipids. This will provide the grounds that will allow us to optimize cultivation conditions for maximum favourable properties of the biosurfactants produced.

Author Contributions: Conceptualization, T.G. and M.Š.; methodology, T.G. and M.Š.; software, T.G., M.Š. and L.M.; investigation T.G., M.Š. and L.M.; resources, T.G. and F.M.G.T.; writing—original draft preparation, T.G.; writing—review and editing, T.G. and F.M.G.T.; project administration, T.G., M.Š. and F.M.G.T. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Tack, F.M.G.; Bardos, P. Overview of Soil and Groundwater Remediation. In *Soil and Groundwater Remediation Technologies: A Practical Guide*; Ok, Y.S., Rinklebe, J., Hou, D., Tsang, D.C.W., Tack, F.M.G., Eds.; CRC Press: Boca Raton, FL, USA, 2020; pp. 1–12. [\[CrossRef\]](#)
2. Volkerling, F.; Breure, A.M.; Rulkens, W.H. Microbiological aspects of surfactant use for biological soil remediation. *Biodegradation* **1998**, *8*, 401–417. [\[CrossRef\]](#)
3. Paria, S. Surfactant-enhanced remediation of organic contaminated soil and water. *Adv. Colloid. Interf.* **2008**, *138*, 24–58. [\[CrossRef\]](#)
4. Deshpande, S.; Shiau, B.J.; Wade, D.; Sabatini, D.A.; Harwell, J.H. Surfactant selection for enhancing ex situ soil washing. *Water Res.* **1999**, *33*, 351–360. [\[CrossRef\]](#)
5. Muthusamy, K.; Gopalakrishnan, S.; Ravi, T.K.; Sivachidambaram, P. Biosurfactants: Properties, commercial production and application. *Curr. Sci.* **2008**, *94*, 736–747.
6. Kosaric, N. Biosurfactants and Their Application for Soil Bioremediation. *Food Technol. Biotechnol.* **2001**, *39*, 295–304. [\[CrossRef\]](#)
7. Chen, S.Y.; Wei, Y.H.; Chang, J.S. Repeated pH-stat fed-batch fermentation for rhamnolipid production with indigenous *Pseudomonas aeruginosa* S2. *Appl. Microbiol. Biot.* **2007**, *76*, 67–74. [\[CrossRef\]](#) [\[PubMed\]](#)
8. Mata-Sandoval, J.C.; Karns, J.; Torrents, A. High-performance liquid chromatography method for the characterization of rhamnolipid mixtures produced by *pseudomonas aeruginosa* UG2 on corn oil. *J. Chromatogr. A* **1999**, *864*, 211–220. [\[CrossRef\]](#)
9. Mata-Sandoval, J.C.; Karns, J.; Torrents, A. Effect of nutritional and environmental conditions on the production and composition of rhamnolipids by *P. Aeruginosa* UG2. *Microbiol. Res.* **2001**, *155*, 249–256. [\[CrossRef\]](#)
10. Rahman, P.K.S.; Gakpe, E. Production, Characterisation and Application of Biosurfactants-Review. *Biotechnology* **2008**, *7*, 360–370. [\[CrossRef\]](#)
11. Rosenberg, E.; Ron, E.Z. Natural role of biosurfactants. *Environ. Microbiol.* **2001**, *3*, 229–236. [\[CrossRef\]](#)
12. Van Bogaert, I.N.A.; Soetaert, W. Sophorolipids. In *Biosurfactants, Part of Microbiology Monographs Book Series*; Soberón-Chávez, G., Ed.; Springer: Berlin/Heidelberg, Germany, 2011; Volume 20, pp. 179–210. [\[CrossRef\]](#)
13. Pekin, G.; Vardar-Sukan, F.; Kosaric, N. Production of sophorolipids from *Candida bombicola* ATCC 22214 using Turkish corn oil and honey. *Eng. Life Sci.* **2005**, *5*, 357–362. [\[CrossRef\]](#)
14. Campos, J.M.; Montenegro Stamford, T.L.; Sarubbo, L.A.; de Luna, J.M.; Rufino, R.D.; Banat, I.M. Microbial Biosurfactants as Additives for Food Industries. *Biotechnol. Prog.* **2013**, *29*, 1097–1108. [\[CrossRef\]](#) [\[PubMed\]](#)
15. Hirata, Y.; Ryu, M.; Oda, Y.; Igarashi, K.; Nagatsuka, A.; Furuta, T.; Sugiura, M. Novel characteristics of sophorolipids, yeast glycolipid biosurfactants, as biodegradable low-foaming surfactants. *J. Biosci. Bioeng.* **2009**, *108*, 142–146. [\[CrossRef\]](#) [\[PubMed\]](#)
16. Santos, D.K.; Rufino, R.D.; Luna, J.M.; Santos, V.A.; Sarubbo, L.A. Biosurfactants: Multifunctional Biomolecules of the 21st Century. *Int. J. Mol. Sci.* **2016**, *17*, 401. [\[CrossRef\]](#)

17. Randhawa, K.K.S.; Rahman, P.K.S.M. Rhamnolipid biosurfactants—Past, present, and future scenario of global market. *Front. Microbiol.* **2014**, *5*, 454. [[CrossRef](#)]
18. Soberón-Chávez, G.; Maier, R.M. Biosurfactants: A General Overview. In *Biosurfactants, Part of Microbiology Monographs Book Series*; Soberón-Chávez, G., Ed.; Springer: Berlin/Heidelberg, Germany, 2011; Volume 20, pp. 1–11. [[CrossRef](#)]
19. Mao, X.; Jiang, R.; Xiao, W.; Yu, J. Use of surfactants for the remediation of contaminated soils: A review. *J. Hazard Mater.* **2015**, *285*, 419–435. [[CrossRef](#)]
20. Silva, R.D.; Almeida, D.G.; Rufino, R.D.; Luna, J.M.; Santos, V.A.; Sarubbo, L.A. Applications of biosurfactants in the petroleum industry and the remediation of oil spills. *Int. J. Mol. Sci.* **2014**, *15*, 12523–12542. [[CrossRef](#)]
21. Sachdev, D.P.; Cameotra, S.S. Biosurfactants in agriculture. *Appl. Microbiol. Biot.* **2013**, *97*, 1005–1016. [[CrossRef](#)]
22. Desai, J.D.; Banat, I.M. Microbial production of biosurfactants and their commercial potential. *Microbiol. Mol. Biol. Rev.* **1997**, *61*, 41–64. [[CrossRef](#)]
23. Daverey, A.; Pakshirajan, K. Production, characterization, and properties of sophorolipids from the yeast *Candida bombicola* using a low-cost fermentative medium. *Appl. Biochem. Biotechnol.* **2009**, *158*, 663–674. [[CrossRef](#)]
24. Thaniyavarn, J.; Chianguthai, T.; Sangvanich, P.; Roongsawang, N.; Washio, K.; Morikawa, M.; Thaniyavarn, S. Production of sophorolipid biosurfactant by *Pichia anomala*. *Biosci. Biotechnol. Biochem.* **2008**, *72*, 2061–2068. [[CrossRef](#)] [[PubMed](#)]
25. Du Noüy, P.L. An interfacial tensiometer for universal use. *J. Gen. Physiol.* **1925**, *7*, 625–631. [[CrossRef](#)] [[PubMed](#)]
26. Chaprão, M.J.; Ferreira, I.N.S.; Correa, P.F.; Rufino, R.D.; Luna, J.M.; Silva, E.J.; Sarubbo, L.A. Application of bacterial and yeast biosurfactants for enhanced removal and biodegradation of motor oil from contaminated sand. *Electron. J. Biotechnol.* **2015**, *18*, 471–479. [[CrossRef](#)]
27. Sarubbo, L.A.; Luna, J.M.D.; Rufino, R.D.; Brasileiro, P.P.F. Production of a Low-cost Biosurfactant for Application in the Remediation of Sea water Contaminated with Petroleum Derivates. *Chem. Eng. Trans.* **2016**, *49*, 523–528. [[CrossRef](#)]
28. Morais, I.M.C.; Cordeiro, A.L.; Teixeira, G.S.; Domingues, V.S.; Nardi, R.M.D.; Monteiro, A.S.; Alves, R.J.; Siqueira, E.P.; Santos, V.L. Biological and physicochemical properties of biosurfactants produced by *Lactobacillus jensenii* P6A and *Lactobacillus gasseri* P65. *Microb. Cell Fact.* **2017**, *16*, 155. [[CrossRef](#)] [[PubMed](#)]
29. Techaoei, S.; Leelapornpisid, P.; Santiarwarn, D.; Lumyong, S.; Mai, C. Preliminary Screening of Biosurfactant-Producing Microorganisms Isolated From Hot Spring and Garages in Northern Thailand. *KMITL Sci. Tech. J.* **2007**, *7*, 38–43.
30. Cooper, D.G.; Goldenberg, B.G. Surface-active agents from two *Bacillus* species. *Appl. Environ. Microb.* **1987**, *53*, 224–229. [[CrossRef](#)]
31. Urum, K.; Grigson, S.; Pekdemir, T.; Mcmenamy, S. A comparison of the efficiency of different surfactants for removal of crude oil from contaminated soils. *Chemosphere* **2006**, *62*, 1403–1410. [[CrossRef](#)]
32. Pansu, M.; Gautheyrou, J. *Handbook of Soil Analysis: Mineralogical, Organic and Inorganic Methods*; Springer: New York, NY, USA, 2006. [[CrossRef](#)]
33. Casida, L.E., Jr.; Klein, D.; Santoro, T. Soil Dehydrogenase Activity. *Soil Sci.* **1964**, *98*, 371–376. [[CrossRef](#)]
34. Daverey, A.; Pakshirajan, K. Sophorolipids from *Candida bombicola* using mixed hydrophilic substrates: Production, purification and characterization. *Colloids Surf. B Biointerface* **2010**, *79*, 246–253. [[CrossRef](#)]
35. Chaillan, F.; Le Flèche, A.; Bury, E.; Phantavong, Y.H.; Grimont, P.; Saliot, A.; Oudot, J. Identification and biodegradation potential of tropical aerobic hydrocarbon-degrading microorganisms. *Res. Microbiol.* **2004**, *155*, 587–595. [[CrossRef](#)] [[PubMed](#)]

