

Article

Damping Optimization of Linear Vibrational Systems with a Singular Mass Matrix

Ninoslav Truhar ^{1,*}  and Maja Petrač ²

¹ Department of Mathematics, Josip Juraj Strossmayer University of Osijek, Trg Ljudevita Gaja 6, 31000 Osijek, Croatia

² Faculty of Agrobiotechnical Sciences, Josip Juraj Strossmayer University of Osijek, Vladimira Preloga 1, 31000 Osijek, Croatia; maja.petrac@fazos.hr

* Correspondence: ntruhar@mathos.hr

Abstract: We present two novel results for small damped oscillations described by the vector differential equation $M\ddot{x} + C\dot{x} + Kx = 0$, where the mass matrix M can be singular, but standard deflation techniques cannot be applied. The first result is a novel formula for the solution X of the Lyapunov equation $A^T X + XA = -I$, where $A = A(v)$ is obtained from $M, C(v) \in \mathbb{R}^{n \times n}$, and $K \in \mathbb{R}^{n \times n}$, which are the so-called mass, damping, and stiffness matrices, respectively, and $\text{rank}(M) = n - 1$. Here, $C(v)$ is positive semidefinite with $\text{rank}(C(v)) = 1$. Using the obtained formula, we propose a very efficient way to compute the optimal damping matrix. The second result was obtained for a different structure, where we assume that $\dim(\mathcal{N}(M)) \geq 1$ and internal damping exists (usually a small percentage of the critical damping). For this structure, we introduce a novel linearization, i.e., a novel construction of the matrix A in the Lyapunov equation $A^T X + XA = -I$, and a novel optimization process. The proposed optimization process computes the optimal damping $C(v)$ that minimizes a function $v \mapsto \text{trace}(ZX)$ (where Z is a chosen symmetric positive semidefinite matrix) using the approximation function $g(v) = c_v + \frac{a}{v} + bv$, for the trace function $f(v) \doteq \text{trace}(ZX(v))$. Both results are illustrated with several corresponding numerical examples.

Keywords: damping optimization; mechanical system; singular mass matrix; Lyapunov equation; trace minimization

MSC: 65F45; 49M25



Citation: Truhar, N.; Petrač, M. Damping Optimization of Linear Vibrational Systems with a Singular Mass Matrix. *Mathematics* **2022**, *10*, 1854. <https://doi.org/10.3390/math10111854>

Academic Editors: Jüri Majak, Ali Farajpour and Asier Ibeas

Received: 1 April 2022
Accepted: 24 May 2022
Published: 28 May 2022

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

We consider small damped oscillations in the absence of gyroscopic forces, described by the vector differential equation

$$\begin{aligned} M\ddot{x} + C\dot{x} + Kx &= 0, \\ x(0) = x_0, \quad \dot{x}(0) &= \dot{x}_0, \end{aligned} \tag{1}$$

where M, C , and K (mass, damping, and stiffness matrices, respectively) are real, symmetric matrices of order n .

The main problem considered in this paper is the derivation (or computation) of the optimal damping for vibrating systems, such as those mentioned above, for the case where the damping matrix becomes singular. The problem of damping optimization is part of a very interesting and active research area where several different approaches exist. Damping optimization is usually a very demanding problem; moreover, the problem of optimizing damping positions with viscosities still has no satisfactory solution.

Damping optimization contains two different sub-problems, including one in which the mass matrix is non-singular and one in which the mass matrix can be singular.

Damping optimization with non-singular mass has been widely investigated during the last two decades. Some of the results concerning the so-called stationary system can be found in [1–9]. A more detailed description of these references can be found in [10].

On the other hand, the problem of non-stationary systems has been considered in [10–12].

Here, M , K , and C are large, usually of order $n > \mathcal{O}(1000)$, and do not have a prescribed structure; M and K are very often diagonal, tridiagonal, or some other structure, depending on the application. It is important to emphasize that the assumptions concerning the mass and the damping matrix do not allow the use of standard deflation techniques as in [13,14], nor the frequency domain approach from [15] because M and C cannot be diagonalized simultaneously.

A damping matrix can be defined in several different ways. One of the most common ways is that $C = C_{in} + C_{ext}(v)$, where C_{in} represents internal damping, and only the external damping part depends on the parameters $v > 0$ (called viscosities). Moreover, external damping can be written as $C_{ext}(v) = vC_i$, where C_i determines the geometry of the i -th damper, and it has a small rank, so that $C_{ext}(v)$ is a semidefinite matrix.

Internal damping, C_{in} , can be modeled in different ways. The most popular is the classical Rayleigh damping:

$$C_{in} = \alpha M + \beta K.$$

However, throughout this paper, we use the definition that internal damping is a small multiple of critical damping; that is, in the case of critical damping

$$C_{in} = \alpha M^{1/2} \sqrt{M^{-1/2} K M^{-1/2}} M^{1/2}, \tag{2}$$

see, e.g., [16,17]. More details regarding the model can be found in [6,7,11,16,18–22].

There are several different (damping) optimization criteria, and the most common ones are based on the asymptotic approach or the approach in which the damping criterion is based on an infinite time scale. For example, in [12,23–26], the optimal displacement or optimal damper positions are based on the criterion that considers asymptotical behavior. On the other hand, in [10], the optimization criteria are defined over the basic period of the periodic external force $g(t)$.

In this paper, we consider the optimization process based on the so-called energy minimization criterion, which is equivalent to the minimization of the trace of the solution of the Lyapunov equation

$$A^T X + X A = -I. \tag{3}$$

For the case where M can be singular, the matrix A that depends on M , D , and K must be carefully constructed because standard linearization is not possible. The particular construction of the matrix A is one of our novel results.

Further, the optimal damping is obtained from the following optimization process:

$$v = \operatorname{argmin}_v f(v) \doteq \operatorname{argmin}_v \operatorname{trace}(Z X(v)), \tag{4}$$

where the damping matrix is given as $D(v) = C_{in} + vC_{ex}$. For the physical background of this penalty function, see [19,20,27].

Here, Z is a symmetric positive semidefinite matrix, usually defined as

$$Z = Z_1 \oplus Z_1, \quad \text{where } Z_1 \in \mathbb{R}^{n \times n}, \quad \text{and } Z_1 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & I_s & 0 \\ 0 & 0 & 0 \end{bmatrix}, \tag{5}$$

where I_s denotes an identity matrix of dimension s .

As was shown in [3] (or [27]), the above optimization criterion is equivalent to the minimization of the mean value of the total energy of all initial data. More details about the construction of the matrix Z can be found in [3].

In this paper, we consider two different cases (two different structures) of damping matrices. In the first part of the paper, we assume that the damping matrix is given as $D(v) = vC_{ex}$, that is, that the internal damping is zero ($C_{in} = 0$). For this particular case, we additionally assume that the dimension of the null space of the mass matrix $\dim(\mathcal{N}(M)) = 1$. For this case, we derive the formula for the solution X of the Lyapunov Equation (3) as a function of v ; this allows us to discuss some properties of the solution and to find the graph of the meromorphic function $v \mapsto \text{trace}(ZX)$ by finding its poles and performing a corresponding partial fraction decomposition.

An example of such a system is the so-called n -mass oscillator or oscillator ladder (Figure 1), where

$$M = \text{diag}(m_1, m_2, \dots, m_n), \tag{6}$$

$$K = \begin{bmatrix} k_1 + k_2 & -k_2 & & & & \\ -k_2 & k_2 + k_3 & -k_3 & & & \\ & \ddots & \ddots & \ddots & & \\ & & & -k_{n-1} & k_{n-1} + k_n & -k_n \\ & & & & -k_n & k_n + k_{n+1} \end{bmatrix}, \tag{7}$$

$$D \equiv C_{in} + C(v) = C_{in} + ve_i e_i^T. \tag{8}$$

Here, $m_i \geq 0$ are the masses, $k_i > 0$ are the spring constants or stiffnesses, e_i is the i -th canonical basis vector, and v is the viscosity of the damper applied on the i -th mass. Note that, for the system presented in Figure 1, the rank of the matrix $C(v)$ is one.

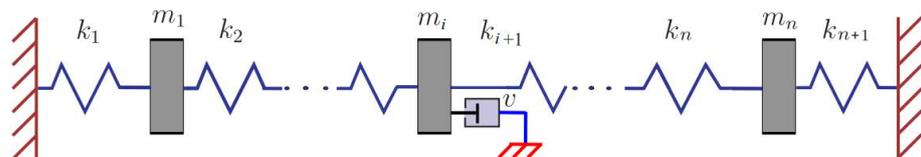


Figure 1. The n -mass oscillator with one damper.

The first part of this paper is devoted to structures similar to the one in Figure 1. For example, in the mass-spring system shown in (6)–(8), if one of the masses, for example, m_n , were to vanish (that is, if one mass were substituted with a damper or if it were sufficiently smaller than the others such that it could be neglected), then the mass matrix M would be singular, and the standard linearization would not be possible. In fact, in such a case, we could not prescribe the initial velocity $\dot{x}_n(0)$, and the phase space would have a dimension less than $2n$. This would be even more the case if there were no damping at the position in question; then, we could not even prescribe $x_n(0)$. More details on this type of structure can be found in [11].

Since we have a strong structure in the first part of the paper ($C_{in} = 0$ and $\dim(\mathcal{N}(M)) = 1$) and, as a result, we present a formula for the solution $X(v)$, we refer to this as the “theoretical part”. As we see in the numerical examples, the structures are extremely unstable without internal damping, and it is hard to calculate any quantities for $\dim(\mathcal{N}(M)) \geq 1$ when $C_{in} = 0$.

Thus, in the second part of the paper, we assume that $\dim(\mathcal{N}(M)) \geq 1$ and $C_{in} > 0$ (usually a small percentage of the critical damping). The second part of the paper is the “numerical part” or “numerical point of view”. In this part, we present a novel construction of the matrix A in the Lyapunov Equation (3) and a novel optimization process that is based on the properties of the formula obtained in the first part of the paper and the new approximated (projected) Lyapunov equation. Our optimization process is based on the idea of approximating the trace function $f(v) \doteq \text{trace}(ZX(v))$ with its approximation

$$g(v) = c_v + \frac{a}{v} + bv, \quad a, b > 0, \tag{9}$$

which allows us to find the minima. Here, a , b , and c_v are obtained by simple interpolation using the approximate trace function $\tilde{f}(v) \doteq \text{trace}(Z\tilde{X}(v))$ through the three points v_1, v_2 , and v_3 , where \tilde{X} is the solution of the approximate Lyapunov equation

$$\tilde{A}^T \tilde{X} + \tilde{X} \tilde{A} = -I, \tag{10}$$

and \tilde{A} is the projected matrix A of smaller dimension.

A similar formula was obtained in [20] for the case $\text{rank}(D(v)) = 1$, while the case $\text{rank}(D(v)) > 1$ seems to be more difficult to handle, as shown in [10,21].

As we see in the section that includes the numerical illustrations, our approach speeds up the viscosity optimization process by 3 to 10 times.

We would like to emphasize that damping optimization using criterion (4) requires solving the Lyapunov Equation (3) numerous times, which may be inefficient, as well as memory- and time-consuming. However, most of the usual (engineering) approaches that assume that all three matrices M , C , and K can be simultaneously diagonalized are inappropriate here due to the structure of the damping matrix.

The paper is organized as follows. In Section 2, we present the novel formula for the solution X of the Lyapunov Equation (3) as the function of the viscosity parameter v . In Section 3, we present a novel approach to calculating the optimal damping matrix D , which includes quasi-optimal positions together with the corresponding optimal viscosity parameter. At the end of Section 3, we illustrate the main results using a numerical example.

2. The Singular Mass Case, $\dim(\mathcal{N}(M)) = 1$

As we emphasized in the introduction, the damped mass-spring system with a singular mass matrix deserves special treatment since standard linearization is not possible. For this purpose, we use the results from the book [11] by Krešimir Veselić on the linearization of damped mass-spring systems with singular mass.

Without losing on generality, we assume that Φ is a real non-singular matrix such that

$$\Phi^T M \Phi = \begin{bmatrix} I_{n-1} & o \\ o^T & 0 \end{bmatrix}, \quad \Phi^T K \Phi = \begin{bmatrix} \Omega_1 & o \\ o^T & \omega_n \end{bmatrix}, \tag{11}$$

where o is a zero vector of dimension $n - 1$, $\Omega_1 = \text{diag}(\omega_1, \dots, \omega_{n-1})$. Then, the matrix is as follows:

$$D = \Phi^T C \Phi = v \Phi^T c c^T \Phi = \begin{bmatrix} D_{11} & D_{12} \\ D_{12}^T & D_{22} \end{bmatrix}, \quad D_{11} \in \mathbb{R}^{n-1, n-1}, \quad D_{22} \neq 0.$$

We now proceed to construct the phase-space formulation of (1), which, after the substitution $x = \Phi y$, with Φ from (11), reads

$$\begin{aligned} \ddot{y}_1 + D_{11} \dot{y}_1 + D_{12} \dot{y}_2 + \Omega_1^2 y_1 &= 0, \\ D_{12}^T \dot{y}_1 + D_{22} \dot{y}_2 + \omega_n^2 y_2 &= 0. \end{aligned} \tag{12}$$

Here, it is important to emphasize that the assumption that $D_{12} \neq 0$ distinguishes this system from others obtained simply by deflation; that is, when one has a damping such that $D_{12} = 0$, then (12) is equivalent with a system

$$\begin{aligned} \ddot{y}_1 + D_{11} \dot{y}_1 + \Omega_1^2 y_1 &= 0, \\ D_{22} \dot{y}_2 + \omega_n^2 y_2 &= 0, \end{aligned}$$

of two independent equations, and it can be considered similar to [28,29].

By introducing the new variables

$$z_1 = \Omega_1 y_1, \quad z_2 = \omega_n y_2, \quad z_3 = \dot{y}_1,$$

the system (12) becomes

$$\dot{z}_1 = \Omega_1 z_3 \tag{13}$$

$$\dot{z}_2 = -\omega_n D_{22}^{-1} \left(D_{12}^T z_3 + \omega_n z_2 \right) \tag{14}$$

$$\dot{z}_3 = -D_{11} z_3 + D_{12} D_{22}^{-1} \left(D_{12}^T z_3 + \omega_n z_2 \right) - \Omega_1 z_1 \tag{15}$$

which yields the following linearization:

$$\dot{z} = Az, \tag{16}$$

$$A = \begin{bmatrix} O_{n-1} & o & \Omega_1 \\ o^T & -\frac{\omega_n^2}{D_{22}} & -\frac{\omega_n}{D_{22}} D_{12}^T \\ -\Omega_1 & \frac{\omega_n}{D_{22}} D_{12} & -D_{11} + D_{12} D_{22}^{-1} D_{12}^T \end{bmatrix}. \tag{17}$$

Recall that the first problem is to find a formula for the solution of the Lyapunov Equation (3).

Thus, we continue with deriving the solution of the Lyapunov Equation (3) using the matrix A form (17), that is:

$$\begin{bmatrix} O_{n-1} & o & -\Omega_1 \\ o^T & -\frac{\omega_n^2}{D_{22}} & \frac{\omega_n}{D_{22}} D_{12}^T \\ \Omega_1 & -\frac{\omega_n}{D_{22}} D_{12} & -D_{11} + D_{12} D_{22}^{-1} D_{12}^T \end{bmatrix} \begin{bmatrix} X_{11} & \eta & X_{12} \\ \eta^T & x_0 & \mu^T \\ X_{12}^T & \mu & X_{22} \end{bmatrix} + \begin{bmatrix} X_{11} & \eta & X_{12} \\ \eta^T & x_0 & \mu^T \\ X_{12}^T & \mu & X_{22} \end{bmatrix} \begin{bmatrix} O_{n-1} & o & \Omega_1 \\ o^T & -\frac{\omega_n^2}{D_{22}} & -\frac{\omega_n}{D_{22}} D_{12}^T \\ -\Omega_1 & \frac{\omega_n}{D_{22}} D_{12} & -D_{11} + D_{12} D_{22}^{-1} D_{12}^T \end{bmatrix} = \begin{bmatrix} -I_{n-1} & o & O_{n-1} \\ o^T & -1 & o^T \\ O_{n-1} & o & -I_{n-1} \end{bmatrix} \tag{18}$$

Before we continue, we denote that $d = \sqrt{v} \Phi^T c = \sqrt{v} \begin{bmatrix} d_1 \\ d_2 \end{bmatrix}$, d_1 is an $n - 1$ dimensional vector, and $0 \neq d_2 \in \mathbb{R}$. This implies

$$\begin{aligned} D_{11} &= v d_1 d_1^T & D_{12} &= v d_1 d_2, & D_{22} &= v d_2^2, \\ \frac{D_{12}}{D_{22}} &= \frac{d_1}{d_2}, & \frac{1}{D_{22}} &= \frac{1}{v} \cdot \frac{1}{d_2^2}, & -D_{11} + D_{12} D_{22}^{-1} D_{12}^T &= O_{n-1}. \end{aligned}$$

The above Lyapunov Equation (18) is equivalent to the following 6 equations:

$$\Omega_1 X_{12}^T + X_{12} \Omega_1 = I_{n-1}, \tag{19}$$

$$\Omega_1 \mu + \frac{\omega_n^2}{v d_2^2} \eta - \frac{\omega_n}{d_2} X_{12} d_1 = o, \tag{20}$$

$$-\Omega_1 X_{22} + X_{11} \Omega_1 - \frac{\omega_n}{d_2} \eta d_1^T = O_{n-1}, \tag{21}$$

$$-\frac{2}{v} \cdot \frac{\omega_n^2}{d_2^2} x_0 + \frac{\omega_n}{d_2} \left(\mu^T d_1 + d_1^T \mu \right) = -1, \tag{22}$$

$$-\frac{1}{v} \cdot \frac{\omega_n^2}{d_2^2} \mu^T + \frac{\omega_n}{d_2} d_1^T X_{22} + \eta^T \Omega_1 - \frac{\omega_n}{d_2} x_0 d_1^T = o, \tag{23}$$

$$\Omega_1 X_{12} - \frac{\omega_n}{d_2} d_1 \mu^T + X_{12}^T \Omega_1 - \frac{\omega_n}{d_2} \mu d_1^T = -I_{n-1}. \tag{24}$$

From Equation (19), it follows

$$X_{12} \Omega_1 = \frac{1}{2} I_{n-1} + S, \text{ where } S \text{ is skew-symmetric, that is } S = -S^T,$$

which implies $s_{ij} = -s_{ji}$ for $i \neq j$ and $s_{ii} = 0$. This further gives us

$$X_{12} = \frac{1}{2} \Omega_1^{-1} + S \Omega_1^{-1}. \tag{25}$$

From Equation (24), it follows

$$\frac{\omega_n}{d_2} d_1 \mu^T + \frac{\omega_n}{d_2} \mu d_1^T = I_{n-1} + \Omega_1 X_{12} + X_{12}^T \Omega_1,$$

which, using Equation (25), gives

$$\frac{\omega_n}{d_2} (d_1 \mu^T + \mu d_1^T) = 2 I_{n-1} + \Omega_1 S \Omega_1^{-1} - \Omega_1^{-1} S \Omega_1. \tag{26}$$

Diagonal entries in Equation (26) give

$$\frac{\omega_n}{d_2} ((d_1)_i \mu_i + \mu_i (d_1)_i) = 2,$$

or

$$\mu_i = \frac{d_2}{\omega_n (d_1)_i}, \quad i = 1, \dots, n - 1, \tag{27}$$

which gives the unknown vector μ .

Now, we can obtain the matrix S . Indeed, from Equation (26), for $i \neq j$, it follows

$$\frac{\omega_j}{\omega_i} s_{ij} - \frac{\omega_j}{\omega_i} s_{ij} = \frac{\omega_n}{d_2} ((d_1)_i \mu_j + (d_1)_j \mu_i),$$

which gives

$$s_{ij} = \frac{\omega_n}{d_2} \cdot \frac{(d_1)_i \mu_j + (d_1)_j \mu_i}{\frac{\omega_i^2 - \omega_j^2}{\omega_i \omega_j}}, \quad i, j = 1, \dots, n - 1, \quad i \neq j. \tag{28}$$

Once we have skew-symmetric S , we can derive X_{12} . From Equation (25), it follows that

$$\begin{aligned} (X_{12})_{ij} &= \frac{\delta_{ij}}{2\omega_j} + (1 - \delta_{ij}) \cdot \frac{\omega_n \omega_i}{d_2 (\omega_i^2 - \omega_j^2)} ((d_1)_i \mu_j + (d_1)_j \mu_i) \\ &= \frac{\delta_{ij}}{2\omega_j} + \frac{(1 - \delta_{ij}) \omega_j}{(\omega_i^2 - \omega_j^2)} \left(\frac{(d_1)_i}{(d_1)_j} + \frac{(d_1)_j}{(d_1)_i} \right), \end{aligned} \tag{29}$$

where δ_{ij} is Kronecker's delta.

We proceed to considering Equation (20), which gives

$$\begin{aligned} \frac{\omega_n^2}{v d_2^2} \eta, &= \frac{\omega_n}{d_2} X_{12} d_1 - \Omega_1 \mu, \\ \eta &= v \frac{d_2^2}{\omega_n^2} \left(\frac{\omega_n}{d_2} X_{12} d_1 - \Omega_1 \mu \right), \quad \Rightarrow \quad \eta_i = v \left(\frac{d_2}{\omega_n} \sum_k^{n-1} (X_{12})_{ik} (d_1)_k - \frac{d_2^2}{\omega_n^2} \omega_i \mu_i \right), \end{aligned}$$

or

$$\eta_i = v \left(\frac{d_2}{\omega_n} \sum_k^{n-1} \left(\frac{\delta_{ik}}{2\omega_k} + \frac{(1 - \delta_{ik}) \omega_i}{(\omega_i^2 - \omega_k^2)} \left(\frac{(d_1)_i}{(d_1)_k} + \frac{(d_1)_k}{(d_1)_i} \right) (d_1)_k \right) - \frac{d_2^2}{\omega_n^2} \frac{\omega_i}{(d_1)_i} \right),$$

which gives:

$$\eta_i = v \left(\frac{d_2}{\omega_n} \sum_k^{n-1} \left(\frac{\delta_{ik}}{2\omega_k} + \frac{(1 - \delta_{ik})\omega_i}{(\omega_i^2 - \omega_k^2)} \frac{(d_1)_i^2 + (d_1)_k^2}{(d_1)_i} \right) - \frac{d_2^3}{\omega_n^3} \frac{\omega_i}{(d_1)_i} \right). \tag{30}$$

Further, from Equation (22), it follows

$$\begin{aligned} \frac{2}{v} \cdot \frac{\omega_n^2}{d_2^2} x_0 &= 1 + \frac{\omega_n}{d_2} (d_1^T \mu + \mu^T d_1) \Rightarrow, \\ x_0 &= v \cdot \frac{d_2^2}{2\omega_n^2} \left(1 + \frac{\omega_n}{d_2} (d_1^T \mu + \mu^T d_1) \right). \end{aligned}$$

Using the fact that $\frac{\omega_n}{d_2} \mu^T d_1 = n - 1$ (which can be seen from Equation (27)), it follows

$$x_0 = v \frac{d_2^2}{2\omega_n^2} (2n - 1). \tag{31}$$

The remaining two diagonal blocks X_{11} and X_{22} we derive using Equations (23) and (21). Thus, from Equation (21), one obtains

$$X_{22} = \Omega_1^{-1} X_{11} \Omega_1 - \frac{\omega_n}{d_2} \Omega_1^{-1} \eta d_1^T, \tag{32}$$

using the symmetry of X_{11} and X_{22} from Equation (32), it follows

$$X_{22} = \Omega_1 X_{11} \Omega_1^{-1} - \frac{\omega_n}{d_2} d_1 \eta^T \Omega_1^{-1}. \tag{33}$$

Now, Equations (32) and (33) imply

$$\Omega_1^{-1} X_{11} \Omega_1 - \frac{\omega_n}{d_2} \Omega_1^{-1} \eta d_1^T = \Omega_1 X_{11} \Omega_1^{-1} - \frac{\omega_n}{d_2} d_1 \eta^T \Omega_1^{-1}. \tag{34}$$

From Equation (34), for $i \neq j$, it follows

$$\frac{\omega_j}{\omega_i} (X_{11})_{ij} - (X_{11})_{ij} \frac{\omega_i}{\omega_j} = \frac{\omega_n}{d_2} \left(\frac{1}{\omega_i} \eta_i (d_1)_j - (d_1)_i \eta_j \frac{1}{\omega_j} \right),$$

or

$$\begin{aligned} (X_{11})_{ij} &= \frac{\omega_n}{d_2} \frac{\omega_i \omega_j}{\omega_i^2 - \omega_j^2} \left(\frac{v}{\omega_i} \left(\frac{d_2}{\omega_n} \sum_k^{n-1} \left(\frac{\delta_{ik}}{2\omega_k} + \frac{(1 - \delta_{ik})\omega_i}{(\omega_i^2 - \omega_k^2)} \frac{(d_1)_i^2 + (d_1)_k^2}{(d_1)_i} \right) - \frac{d_2^3}{\omega_n^3} \frac{\omega_i}{(d_1)_i} \right) (d_1)_j - \right. \\ &\quad \left. \frac{v(d_1)_i}{\omega_j} \left(\frac{d_2}{\omega_n} \sum_k^{n-1} \left(\frac{\delta_{jk}}{2\omega_j} + \frac{(1 - \delta_{jk})\omega_j}{(\omega_j^2 - \omega_k^2)} \frac{(d_1)_j^2 + (d_1)_k^2}{(d_1)_j} \right) - \frac{d_2^3}{\omega_n^3} \frac{\omega_j}{(d_1)_j} \right) \right). \end{aligned} \tag{35}$$

On the other hand, from Equation (32), it follows

$$(X_{22})_{ij} = \frac{\omega_j}{\omega_i} (X_{11})_{ij} - \frac{\omega_n}{d_2} \frac{\eta_i (d_1)_j}{\omega_i}.$$

Finally, we can obtain the diagonal entries for both matrices X_{11} and X_{22} from Equation (23). Indeed, for the diagonal entries of X_{22} , one obtains:

$$(X_{22})_{ii} = - \sum_{k \neq i}^{n-1} (X_{22})_{ik} (d_1)_k + \frac{d_2}{\omega_n (d_1)_i} \left(\frac{1}{v} \frac{\omega_n^2}{d_2^2} \mu_i - \eta_i \omega_i + \frac{\omega_n}{d_2} x_0 (d_1)_i \right),$$

and

$$(X_{11})_{ii} = (X_{22})_{ii} - \frac{\omega_n \eta_i}{d_2 \omega_i} (d_1)_i.$$

Now, the trace of the solution X of the Lyapunov Equation (3) can be obtained as

$$\text{trace}(X) = 2 \cdot \text{trace}(X_{11}) + \sum_i^{n-1} \frac{\omega_n \eta_i}{d_2 \omega_i} (d_1)_i + x_0,$$

or

$$\text{trace}(X) = 2 \cdot \sum_i^{k-1} (X_{11})_{ii} + \sum_i^{n-1} \frac{\omega_n \eta_i}{d_2 \omega_i} (d_1)_i + v \frac{d_2^2}{2\omega_n^2} (2n - 1). \tag{36}$$

As one can see from the structure of Equation (36), the formula for the trace is very complicated, even for this special case in which the damping matrix is of rank one. Moreover, if Z_1 has just one non-zero entire function, that is, if $Z_1 = e_i e_i^T$, where e_i denotes the i -th canonical vector, the formula for the trace of (ZX) is still complicated. Indeed, if we let Z be defined as $Z = e_i e_i^T \oplus 1 \oplus e_i e_i^T$, then

$$\begin{aligned} \text{trace}(ZX) &= 2 \cdot (X_{11})_{ii} + v \frac{d_2^2}{2\omega_n^2} (2n - 1) \\ &+ v \left(\sum_i^{n-1} \frac{(d_1)_i}{\omega_i} \sum_k^{n-1} \left(\frac{\delta_{ik}}{2\omega_k} + \frac{(1 - \delta_{ik})\omega_i}{(\omega_i^2 - \omega_k^2)} \frac{(d_1)_i^2 + (d_1)_k^2}{(d_1)_i} \right) - \frac{d_2^3}{\omega_n^3} \frac{\omega_i}{(d_1)_i} \right), \end{aligned} \tag{37}$$

where

$$\begin{aligned} (X_{11})_{ii} &= - \sum_{k \neq i}^{n-1} \left(\frac{\omega_k}{\omega_i} (X_{11})_{ik} - \frac{\omega_n \eta_i (d_1)_k}{d_2 \omega_i} \right) (d_1)_k + \frac{d_2}{\omega_n (d_1)_i} \left(\frac{1}{v} \frac{\omega_n^2}{d_2^2} \mu_i - \eta_i \omega_i + \frac{\omega_n}{d_2} x_0 (d_1)_i \right) \\ &- \frac{\omega_n \eta_i}{d_2 \omega_i} (d_1)_i, \end{aligned} \tag{38}$$

and where $(X_{11})_{ik}$, μ_i , and η_i can be obtained from Equations (35), (27), and (30), respectively.

Once again, we see that Formula (37) for the trace of the solution of the Lyapunov Equation (3) is still very complicated, which is partly a consequence of the fact that we use all entries of the solution for the sum of the diagonal entries.

Thus, the formulas presented in this section serve primarily as a way to find an implicit formula for the solution $X(v)$ and a corresponding partial fraction decomposition for the function $v \mapsto \text{trace}(ZX)$.

On the other hand, as we see in the next section, we only need the trace of the solution for the optimization process, which can be obtained much more efficiently for a certain setting.

3. Damping Optimization

Recall that, in the optimization process, we must find such c , viz. $d = \sqrt{v} \Phi^T c$, such that

$$\text{trace}(ZX) = \min,$$

where X is a solution of the following Lyapunov equation:

$$A^T X + X A = -I, \tag{39}$$

where A is defined as in (17), and Z is defined as in (5).

Usually, the optimization procedure means that we choose a vector (depending on the position of the damper) c_1 , and then find the corresponding optimal viscosity by simply solving

$$\frac{d}{dv} \text{trace}(ZX(v_0)) = 0.$$

Once we find the optimal damping vector $(d_{opt})_1 = \sqrt{v_0} \Phi^T c_1$, we continue the same process for the next vector c_2 . After obtaining a set of “optimal vectors” $\{(d_{opt})_1, \dots, (d_{opt})_k\}$ for the global optimization vector, we choose one that produces the smallest trace(ZX).

One can see that, even in this very simple case (rank one damping), the whole optimization process is computationally demanding.

Therefore, we propose here a novel approach that allows us to very efficiently calculate a quasi-optimal damping vector d_{opt} .

3.1. Case 1

As in the first case, consider the optimization problem

$$\text{trace}(ZX) = \min,$$

where X is the solution of the Lyapunov Equation (50), A is defined as in (17), and Z is defined as

$$Z = e_i e_i^T \oplus 1 \oplus e_i e_i^T,$$

for some $i \in \{1, \dots, n - 1\}$.

As shown in the previous section for this case, the trace is equal to

$$\text{trace}(ZX) = 2(X_{22})_{ii} - \frac{\omega_n^2 \eta_i}{v d_2^2 \omega_i} (d_1)_i.$$

Now, we propose a novel approach. Instead of choosing the first (position) vector c_1 and deriving an optimal viscosity using Formulas (37), (35), (27), and (30) to give us the first optimal vector $(d_{opt})_1 = \sqrt{v_0} \Phi^T c_1$, we assume that an optimal position vector c_{opt} has the following form:

$$\Phi^T c_{opt} = [e_i, d_2]^T \Rightarrow c_{opt} = \Phi^{-T} [e_i, d_2]^T.$$

This means that $d_1 = e_i$, which greatly simplifies the computation of the trace.

The choice of this (d_{opt}) we call quasi-optimal.

Now, multiplying Equation (23) by $d_1 = e_i$ from the right-hand side, we obtain

$$+ \frac{\omega_n}{d_2} e_i^T X_{22} e_i = \frac{1}{v} \cdot \frac{\omega_n^2}{d_2^2} \mu^T e_i - \eta^T \Omega_1 e_i + \frac{\omega_n}{d_2} x_0 e_i^T e_i,$$

or

$$(X_{22})_{ii} = \frac{d_2}{\omega_n} \left(\frac{1}{v} \cdot \frac{\omega_n^2}{d_2^2} \mu_i - \eta_i \omega_i + \frac{\omega_n}{d_2} x_0 \right). \tag{40}$$

This all implies that the trace of the solution of the Lyapunov Equation (50) is given as

$$\text{trace}(ZX) = 2 \frac{d_2}{\omega_n} \left(\frac{1}{v} \cdot \frac{\omega_n^2}{d_2^2} \mu_i \eta_i \omega_i + \frac{\omega_n}{d_2} x_0 \right) + \frac{\omega_n \eta_i}{d_2 \omega_i} + x_0.$$

For this simplified case, a simple calculation yields

$$(X_{12})_{ii} = \frac{1}{2\omega_i}, \quad \mu_i = \frac{d_2}{\omega_n},$$

$$\eta_i = v \frac{d_2^2}{\omega_n^2} \left(\frac{\omega_n}{d_2} \frac{1}{2\omega_i} - \omega_i \frac{d_2}{\omega_n} \right), \quad x_0 = v \frac{3}{2} \frac{d_2^2}{\omega_n^2}.$$

The new, simplified formula for the trace reads:

$$\text{trace}(ZX) = \frac{2}{v} + \frac{v}{2} \cdot \left(\frac{1}{\omega_i^2} + 4 \frac{d_2^4 \omega_i^2}{\omega_n^4} + 5 \frac{d_2^2}{\omega_n^2} \right).$$

The optimal viscosity v_{opt} is a stationary point of the trace($ZX(v)$), that is

$$v_{opt} = \frac{2\omega_i\omega_n^2}{\sqrt{4d_2^4\omega_i^4 + 5d_2^4\omega_i^2\omega_n^2 + \omega_n^4}}.$$

This means that the optimal damping vector is given by

$$c_{opt} = \frac{1}{\sqrt{v_{opt}}} \cdot \Phi^{-T}[e_i, d_2]^T.$$

3.2. Case 2

As in the second case, we consider the similar optimization problem

$$\text{trace}(ZX) = \min,$$

where X is the solution of the Lyapunov Equation (50), A is defined as in (17), but Z is defined as

$$Z = Z_1 \oplus 1 \oplus Z_1,$$

where

$$Z_1 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & I_s & 0 \\ 0 & 0 & 0 \end{bmatrix},$$

for some $s \ll n$.

For simplicity, let us assume that $s = 2$, viz.

$$Z_1 = 0_{n-i} \oplus I_2 \oplus 0_{n+i-1} = [e_i \quad e_{i+1}] \begin{bmatrix} e_i^T \\ e_{i+1}^T \end{bmatrix},$$

where 0_k denotes a zero matrix of dimension $k \times k$.

Then, similarly to Case 1, we can determine $(c_{opt})_1 = \frac{1}{\sqrt{(v_{opt})_1}} \cdot \Phi^{-T}[e_i, d_2]^T$ for the case $(Z_1)_1 = e_i e_i^T$ and $(c_{opt})_2 = \frac{1}{\sqrt{(v_{opt})_2}} \cdot \Phi^{-T}[e_{i+1}, d_2]^T$ for the case $(Z_1)_2 = e_{i+1} e_{i+1}^T$.

Now, we define the quasi-optimal damping matrix as

$$D_{opt} = (v_{opt})_1 \cdot (c_{opt})_1 (c_{opt})_1^T + (v_{opt})_2 \cdot (c_{opt})_2 (c_{opt})_2^T.$$

3.3. Numerical Example: Rank One

We now illustrate the results from Section 3.1 with a simple numerical example describing the mass-spring system (6)–(8).

For simplicity, we take $n = 10$, all $m_i = 1$, for $i = 1, \dots, n - 1$ and $m_n = 0$ and all $k_i = 1$ for $i = 1, \dots, n - 1$, yielding

$$M = \begin{bmatrix} 1 & 0 & & & \\ 0 & 1 & 0 & & \\ & \ddots & \ddots & \ddots & \\ & & 0 & 1 & 0 \\ & & & 0 & 0 \end{bmatrix}, \quad K = \begin{bmatrix} 2 & -1 & & & \\ -1 & 2 & -1 & & \\ & \ddots & \ddots & \ddots & \\ & & -1 & 2 & -1 \\ & & & -1 & 2 \end{bmatrix}.$$

We define the damping matrix $D \doteq D(i, v)$ as a function of the viscosity parameter v and damper positions $i \in \{1, \dots, n - 1\}$, with two different structures.

Structure 1: $D(i, v) = v \Phi^T c c^T \Phi^T, \quad c = [e_i, 1]^T,$

where e_i denotes the i -th canonical basis vector of dimension $n - 1$.

Structure 2: $D(i, v) = v c c^T, \quad c = [e_i, 1]^T.$

Table 1 shows the optimal values of the trace function $v \rightarrow \text{trace}(ZX)$, for

$$Z \doteq f_3 f_3^T \oplus 1 \oplus f_3 f_3^T,$$

where f_3 denotes the 3-th canonical basis vector of dimension $2 \cdot n - 1$.

Table 1. Optimal traces vs. damper positions.

Positions i	1	2	3	4	5	6	7	8	9
Optimal trace structure 1	327.22	105.75	210.88	81.38	118.10	311.10	3300.1	15,083	117,110
Optimal trace structure 2	10^9	10^9	7.1768	10^9	10^9	10^9	10^9	10^9	10^9

As can be seen from Table 1, it is obvious that “the best possible damping matrix” is $D = v_{opt}[e_3, 1][e_3, 1]^T$ with optimal viscosity $v_{opt} = 0.56$, which is consistent with the results from Section 3.1.

We want to emphasize that, for all other positions within structure 2, the system is extremely unstable; therefore, we add a small perturbation (of single precision order), which results in traces $O(10^9)$.

4. The Singular Mass Case, $\dim(\mathcal{N}(M)) \geq 1$

As we described in the introduction, in this section, we consider a slightly different configuration.

Recall that we are considering a system of differential Equations (1), viz.

$$\begin{aligned} M\ddot{x} + C\dot{x} + Kx &= 0, \\ x(0) = x_0, \quad \dot{x}(0) &= \dot{x}_0, \end{aligned} \tag{41}$$

where M, C , and K (mass, damping, and stiffness matrices, respectively) are real, symmetric matrices of order n .

Let $\Phi = [\Phi_0 \quad \Phi_+]$ be a real non-singular matrix, such that $\Phi_0^T M \Phi_0 = 0_{n_0}$, $\Phi_0^T M \Phi_+ = 0_{n_0, m}$, and $\Phi_+^T M \Phi_+ = I_m$, which means that we can write:

$$\Phi^T M \Phi = \begin{bmatrix} 0_{n_0} & \\ & I_m \end{bmatrix}, \quad \Phi^T K \Phi = \begin{bmatrix} \Omega_0^2 & \\ & \Omega_+^2 \end{bmatrix}, \tag{42}$$

where Ω_0 and Ω_+ are quadratic matrices of dimension n_0 , with zeros and $\omega_1^0, \dots, \omega_{n_0}^0 > 0$ corresponding, respectively, with zero eigenvalues in the matrix M . Further, $\Omega_+ = \text{diag}(\omega_1, \dots, \omega_m)$, where $m = n - n_0$.

In addition, we assume here that $n_0 \doteq \dim(\mathcal{N}(M)) \geq 1$, and the damping is defined as

$$C_{in} + v \cdot C_{ex}, \text{ where } C_{in} \doteq \alpha \Omega = \alpha \begin{bmatrix} \Omega_0 & \\ & \Omega_+ \end{bmatrix}.$$

Then, the damping matrix has the form

$$D = \Phi^T (C_{in} + v \cdot C_{ex}) \Phi = \begin{bmatrix} D_{11} & D_{12} \\ D_{12}^T & D_{22} \end{bmatrix}, \quad D_{11} \in \mathbb{R}^{n_0, n_0}, \quad D_{22} \neq 0.$$

Similarly to Section 2, in the first part of this section, we derive a new “linearized” system of differential equations.

First, note that all the above imply that

$$\begin{aligned} D_{11}\dot{x}_1 + D_{12}\dot{x}_2 + \Omega_0^2 x_0 &= 0, \\ \dot{x}_2 + D_{12}^T \dot{x}_1 + D_{22}\dot{x}_2 + \Omega_+^2 x_+ &= 0, \end{aligned} \tag{43}$$

where $x = [x_0, x_+]$, and x_0 and x_+ are of dimension n_0 and m , respectively.

Let us emphasize again that the assumption $D_{12} \neq 0$ distinguishes the system under consideration from other (usually considered) systems obtained simply by deflation. If we were to have a damping such that $D_{12} = 0$, then (43) would be equivalent to a system

$$\begin{aligned} D_{11}\dot{x}_1 + \Omega_0^2 x_0 &= 0, \\ \dot{x}_2 + D_{22}\dot{x}_2 + \Omega_+^2 x_+ &= 0, \end{aligned}$$

of two independent equations that represent a system of differential algebraic equations and would be considered similar to [28,29].

By introducing the new variables

$$z_1 = \Omega_0 x_0, \quad z_2 = \Omega_+ x_+, \quad z_3 = \dot{x}_2,$$

the system (43) becomes

$$\dot{z}_1 = -\Omega_0 D_{11}^{-1} D_{12} z_3 - \Omega_0 D_{11}^{-1} \Omega_0 z_1 \tag{44}$$

$$\dot{z}_2 = \Omega_+ z_3 \tag{45}$$

$$\dot{z}_3 = D_{12}^T D_{11}^{-1} \Omega_0 z_1 - \Omega_+ z_2 + (D_{12}^T D_{22}^{-1} D_{12} - D_{22}) z_3 \tag{46}$$

which yields to the following linearization:

$$\dot{z} = Az, \tag{47}$$

$$A = \begin{bmatrix} -\Omega_0 D_{11}^{-1} \Omega_0 & 0_{n_0, m} & -\Omega_+ D_{11}^{-1} D_{12} \\ 0_{m, n_0} & 0_{m, m} & \Omega_+ \\ D_{12}^T D_{11}^{-1} \Omega_+ & -\Omega_+ & D_{12}^T D_{11}^{-1} D_{12} - D_{22} \end{bmatrix}. \tag{48}$$

We would like to emphasize that if $D_{12} = 0$, then the linearization (48) would become

$$A_+ = \begin{bmatrix} 0 & \Omega_+ \\ -\Omega_+ & -D_{22} \end{bmatrix}, \tag{49}$$

which is the standard linearization used in many papers, such as [3–7].

Again, our goal is to find such an external damping $v\Phi^T C_{ex}\Phi$ such that

$$\text{trace}(ZX) = \min,$$

where X is a solution of the following Lyapunov equation:

$$A^T X + XA = -I, \tag{50}$$

where A is defined as in (48), and Z is defined as in (5).

Recall that from (36), in the case of $\dim(\mathcal{N}(M)) = 1$ and $\alpha = 0$ (no internal damping), we have

$$f(v) = \text{trace}(X) = 2 \cdot \sum_i^{k-1} (X_{11})_{ii} + \sum_i^{n-1} \frac{\omega_n \eta_i}{d_2 \omega_i} (d_1)_i + v \frac{d_2^2}{2\omega_n^2} (2n - 1).$$

This and (38) imply that, for the one-dimensional singularity case, the trace function has the following form:

$$f(v) = \frac{a_0}{v} + b_0 v + c_0,$$

where the constants $a_0, b_0,$ and c_0 are obtained from (36) and (38).

This result is quite similar to the formula obtained in [20] for the case with non-singular mass M and rank one damping.

Unfortunately, at the moment, we do not have a similar formula for damping with a rank larger than one. Thus, we propose a new (projection) approximation for solving Lyapunov Equation (50).

Further, we take advantage of the fact that, for the solution X of the Lyapunov Equation (50) and the solution Y of the so-called dual Lyapunov equation

$$AY + YA^T = -Z, \tag{51}$$

it holds that

$$\text{trace}(Y) = \text{trace}(ZX).$$

Thus, in what follows, instead of A from (48) and Z from (5), we consider the projected Lyapunov equation

$$A_p X_p + X_p A_p^T = -Z_p, \tag{52}$$

where

$$A_p = \begin{bmatrix} -\Omega_0 D_{11}^{-1} \Omega_0 & 0_{12} & -\Omega_+ D_{11}^{-1} \widehat{D}_{12} \\ 0_{21} & 0_{22} & \Omega_p \\ \widehat{D}_{12}^T D_{11}^{-1} \Omega_p & -\Omega_p & \widehat{D}_{12}^T D_{11}^{-1} \widehat{D}_{12} - \widehat{D}_{22} \end{bmatrix}, \tag{53}$$

where Ω_p and \widehat{D}_{12} are p dimensional principal submatrices of Ω_+ and D_{12} , respectively. The matrix Z_p is obtained as the direct sum of two p dimensional submatrices of the matrix Z . That is, if $Z = Z_1 \oplus Z_2$, where Z_1 is $n \times n$ and Z_2 is $(n - n_0) \times (n - n_0)$ with I_s (identity of order s) as principal submatrix, respectively, then

$$Z_p = Z_{(p,1)} \oplus Z_{(p,2)}, \tag{54}$$

where $Z_{(p,1)}$ is a $(p + n_0) \times (p + n_0)$ dimensional matrix, and $Z_{(p,2)}$ is a $p \times p$ dimensional matrix, where both have I_s as principal submatrix. Note that the matrices in the projected Lyapunov Equation (53) have dimensions $(2p + n_0) \times (2p + n_0)$.

We now illustrate the efficiency of the above approach. We have noticed that, in many applications, the reduced dimension is between the order of s (half the rank of the projection matrix Z from the right-hand side of the Lyapunov equation) up to two or three

times s . Thus, if $s = 0.1 \cdot n$ and we set $p = 2 \cdot s$, this means that any direct Lyapunov solver requiring $\mathcal{O}(n^3)$ (such as Bartels–Stewart or Hammerling) requires $0.2^3 \mathcal{O}(n^3)$ for the projected equations, which represents a speed increase of a factor more than 100. Obviously, the increase in speed can be even larger if the rank of the matrix Z is smaller.

To demonstrate the accuracy of the obtained approximation, we propose a simple residual error. Indeed, after solving the Lyapunov Equation (52), we have the approximate solution

$$X_p = \begin{bmatrix} p & p + n_0 \\ (X_p)_{11} & (X_p)_{12} \\ (X_p)_{12}^T & (X_p)_{22} \end{bmatrix}.$$

Now, our approximation of the full dimension can be defined as

$$\tilde{X} = \begin{bmatrix} p & m - p & p & m + n_0 - p \\ (X_p)_{11} & 0 & (X_p)_{12} & 0 \\ 0 & 0 & 0 & 0 \\ (X_p)_{12}^T & 0 & (X_p)_{22} & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}.$$

Let A be full dimensional matrix form (52); then, the residual is simply defined as

$$E = A\tilde{X} + \tilde{X}A^T + Z. \tag{55}$$

The error that determines our tolerance is defined as

$$err \doteq \frac{\|E\|_F}{\text{trace}(\tilde{X})}. \tag{56}$$

Finally, for the optimization process, we propose an approach similar to parabolic minimization, but instead of using parabolic model functions, we propose using hyperbolic functions

$$g(v) = \frac{a}{v} + bv + c,$$

where a, b , and c are determined by a simple interpolation through the three previously determined points v_1, v_2 , and v_3 . The zero of $g'(v_4) = 0$ is our first approximation for the optimal v . Now, one of the previous points $\{v_1, v_2, v_3\}$ is replaced by this new minimum v_4 , and the process is repeated until the selected tolerance level is attained.

All of the above considerations are presented in Algorithm 1. After performing one offline step of the simultaneous diagonalization of matrices M and K as in (42),

$$\Phi^T M \Phi = \begin{bmatrix} 0_{n_0} & \\ & I_m \end{bmatrix}, \quad \Phi^T K \Phi = \begin{bmatrix} \Omega_0^2 & \\ & \Omega_+^2 \end{bmatrix},$$

and setting (or defining) the damper “positions” (geometry),

$$D = \Phi^T (C_{in} + v \cdot C_{ex}) \Phi = D_{in} + v D_{ex},$$

we can present Algorithm 1.

Algorithm 1 Calculate optimal viscosity v_{opt}

Require: $\Omega_1, \Omega_2, \{v_1, v_2, v_3\}$ - starting viscosities, $Z, D_{in}, D_{ex}, maxiter, tol$

Ensure: v_{opt}

- 1: **for** $i \in \{1, 2, 3\}$, **define do**
- 2: $D(v_i) = D_{in} + vD_{ex}$
- 3: corresponding $A(v_i)$ as in (53) and Z_p as in (54)
- 4: **define** reduced dimension p , and calculate approximate solution X_p of $A_p X_p + X_p A_p^T = -Z_p$,
- 5: **check** does err from (56) satisfy $err < tol$
- 6: **if** $err < tol$, **for** err from (56) **then**
- 7: **continue** to 11:
- 8: **else**
- increase p and go to 4:
- 9: **end if**
- 10: **end for**
- 11: **For** the model function

$$g(v) = \frac{a}{v} + bv + c,$$

use standard linear least squares method through the points $\{g(v_1), g(v_2), g(v_3)\}$ to determine a, b , and c

- 12: $v_0 = \sqrt{\frac{a}{b}}$ - the first approximation of optimal viscosity
 - 13: **for** $k = 1, \dots, maxiter$ **do**
 - 14: $v_k = v_{k-1}$
 - 15: $D(v_k) = D_{in} + v(k)D_{ex}$
 - 16: **set** $A(v_i)$ as in (53)
 - 17: **calculate** approximate solution X_p of $A_p X_p + X_p A_p^T = -Z_p$
 - 18: **determine** new set $\{v_1, v_2, v_3\}$ (leave new minimum and its "neighbors")
 - 19: **determine** new a, b , and c for the new points $\{g(v_1), g(v_2), g(v_3)\}$
 - 20: $v_k = \sqrt{\frac{a}{b}}$ - the new approximation of optimal viscosity
 - 21: **if**
 - $\frac{|v_k - v_{k-1}|}{|v_k|} \leq tol$
 - then**
 - 22: $v_{opt} = v_k$
 - 23: **else**
 - goto** 8:
 - 24: **end if**
 - 25: **end for**
-

5. Numerical Illustration

In this section, we illustrate the performance of Algorithm 1 on three different classes of mechanical systems, used in many papers such as [6,16], with the essential difference that we assume that the mass matrix can be singular.

Example 1. Consider the mechanical system with

$$M = \text{diag}(m_1, m_2, \dots, m_n)$$

where $m_1 = \dots m_{n_0} = 0$, and

$$K = \begin{bmatrix} k_1 & -k_1 & & & & & \\ -k_1 & k_1 + k_2 & -k_2 & & & & \\ & \ddots & \ddots & \ddots & & & \\ & & -k_{n-2} & k_{n-2} + k_{n-1} & -k_{n-1} & & \\ & & & -k_{n-1} & k_{n-1} + k_n & & \end{bmatrix}.$$

Let $\Phi = [\Phi_0 \ \Phi_+]$ be a real non-singular matrix as in (42), such that

$$\Phi^T M \Phi = \begin{bmatrix} 0_{n_0} & \\ & I_m \end{bmatrix}, \quad \Phi^T K \Phi = \begin{bmatrix} \Omega_0^2 & \\ & \Omega_+^2 \end{bmatrix}.$$

As we have mentioned above, the damping matrix is defined as

$$D = D_{in} + v D_{ex} \\ D_{in} = \Phi^T C_{in} \Phi, \quad D_{ex} = \Phi^T C_{ex} \Phi.$$

We present results on optimal viscosities v_{opt} obtained for three different configurations of m_i and k_i , and a set of 10 prescribed positions, that is, for 10 predefined matrices D_{ex} .

Configuration 1.

For the first configuration, we set

$$n = 1000 \text{— dimension of matrices, } n_0 = 10 \text{— dimension of null subspace of } M, \\ m_j = 12 \cdot j, j = n_0 + 1, \dots, n, \quad k_j = 1, j = 1, \dots, n.$$

The internal damping matrix is defined as

$$D_{in} = 10^{-4} \cdot \Omega, \quad \Omega \doteq \Omega_0 \oplus \Omega_+.$$

Let φ_t be the t -th column of the matrix Φ_+ . Then, the external damping matrix (which depends on positions) is defined as

$$D_{ex} = [\Phi_0 \ \Phi_t], \Phi_t = [\varphi_{21+100 \cdot t} \ \dots \ \varphi_{40+100 \cdot t}], \quad t = 0, \dots, 9.$$

This means that for the first configuration, the external damping has columns from φ_{21} to φ_{40} ; the second configuration has columns φ_{21} to φ_{40} ; and so on to the last one with columns φ_{921} to φ_{940} .

It is important to emphasize that at the first n_0 positions, the system contains only dampers, so the first n_0 masses are 0.

For the matrix Z (on the right-hand side in the Lyapunov equation), we set

$$Z = 0_{n_0} \oplus Z_1 \oplus Z_1, \quad Z_1 = I_s \oplus 0_{m-s},$$

where 0_{n_0} is an $n_0 \times n_0$ zero matrix, and I_s is an identity matrix of dimension $s = 100$.

The obtained results are presented in Table 2.

Table 3. Optimal viscosities for Configuration 2.

Positions(t) 21:40 + 100· t	0	1	2	3	4
Optimal visc. Algorithm 1	9.0137	39.209	7.8999×10^1	1.2126×10^2	1.5291×10^2
Optimal trace Algorithm 1	9.7801×10^6	1.4589×10^6	2.5182×10^6	3.4452×10^6	3.9859×10^6
Optimal visc. fminsearch	9.0137	39.209	7.6474×10^1	1.1389 ²	1.4135×10^2
Optimal trace fminsearch	9.7801×10^6	1.4589×10^6	2.5174×10^6	3.4136×10^6	3.9424×10^6
Rel. error (56)	7.0347×10^{-17}	1.0986×10^{-16}	1.9372×10^{-5}	2.5991×10^{-5}	3.1844×10^{-5}
Positions(t) 21:40 + 100· t	5	6	7	8	9
Optimal visc. Algorithm 1	1.8644×10^2	2.3116×10^2	2.6915×10^2	3.2734×10^2	2.4521×10^2
Optimal trace Algorithm 1	4.3150×10^6	4.8266×10^6	4.8698×10^6	5.2954×10^6	4.5854×10^6
Optimal visc. fminsearch	1.6896×10^2	2.0028×10^2	2.2848×10^2	2.7213×10^2	2.1241×10^2
Optimal trace fminsearch	4.2718×10^6	4.7244×10^6	4.6841×10^6	5.0019×10^6	4.4533×10^6
Rel. error (56)	3.8534×10^{-5}	4.5229×10^{-5}	5.0984×10^{-5}	5.4818×10^{-5}	4.9010×10^{-5}

Configuration 3.

The last case within the numerical illustrations is again an oscillator ladder with a different configuration.

This configuration is found in [6,16].

We consider the mechanical system shown in Figure 2, with $3d + 1$ masses, consisting of three rows of masses with $d + 1$ springs. Each row has springs of the same stiffness equal to $k_1, k_2,$ and k_3 . On the left-hand side, rows of springs are connected to the fixed base, and on the right-hand side, they are connected to the last mass (m_{3d+1}), which is connected to the fixed base with a spring of stiffness k_4 .

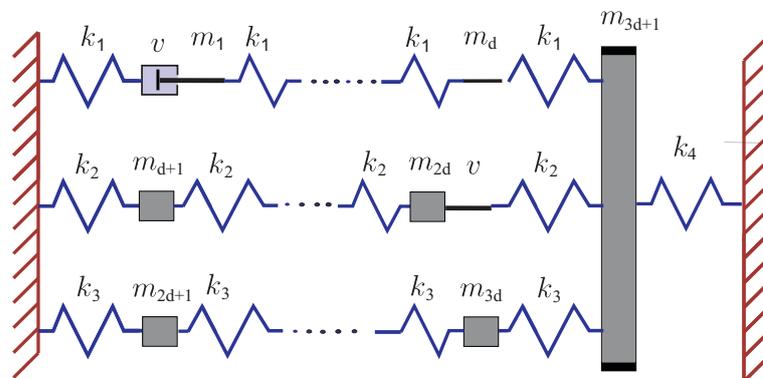


Figure 2. $3d + 1$ mass oscillator.

The mathematical model for the considered vibrational system is given by Equation (41), where the mass matrix is

$$M = \text{diag}(m_1, m_2, \dots, m_n).$$

The stiffness matrix is defined as

$$K = \begin{bmatrix} K_{11} & & & -\kappa_1 \\ & K_{22} & & -\kappa_2 \\ & & K_{33} & -\kappa_3 \\ -\kappa_1^T & -\kappa_2^T & -\kappa_3^T & k_1 + k_2 + k_3 + k_4 \end{bmatrix},$$

where

$$K_{ii} = k_i \begin{bmatrix} 2 & -1 & & & \\ -1 & 2 & -1 & & \\ & \ddots & \ddots & \ddots & \\ & & -1 & 2 & -1 \\ & & & -1 & 2 \end{bmatrix}, \quad \kappa_i = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ k_i \end{bmatrix}, \quad i = 1, 2, 3.$$

In our example, we consider the following configuration:

$$\begin{aligned} d &= 300, & n &= 3d + 1 = 901, \\ m_k &= 0, & k &= 1, \dots, n_0, & m_k &= 0.01, & k &= n_0 + 1, \dots, d, \\ m_k &= 2, & k &= d + 1, \dots, 2 \cdot d, & m_k &= 400, & k &= 2 \cdot d, \dots, 3 \cdot d, & m_n &= 100, \\ k_1 &= 1, & k_2 &= 2, & k_3 &= 2, & k_4 &= 5. \end{aligned}$$

As in the two previous cases, for the damping we take

$$D_{in} = 10^{-5} \cdot \Omega, \Omega \doteq \Omega_0 \oplus \Omega_+,$$

which is the internal damping matrix and

$$D_{ex} = [\Phi_0 \quad \Phi_t], \Phi_t = [\varphi_{21+150 \cdot t} \quad \dots \quad \varphi_{40+150 \cdot t}], \quad t = 0, \dots, 9,$$

for the external damping, where φ_t is the t -th column of the matrix Φ_+ .

Here, as in the previous two cases, at the first n_0 positions (“first row”), the system contains only dampers; therefore, the first $m_i = 0$, for $i = 1, \dots, n_0$.

For the matrix Z , we use the same matrix as in the previous two cases; it is defined by (54).

The obtained results are presented in Table 4, where the largest projection space has a dimension of $p = 350$. As a result of specified structure (the first two rows are lighter than the third one), it suffices to take $p = 200$ for the positions $n_0 + 1, \dots, 2 \cdot n$, and $p = 300$ for the positions $2 \cdot n + 1, \dots, 3 \cdot n + 1$.

Table 4. Optimal viscosities for Configuration 3.

Positions(t) 21:40 + 100· t	0	1	2	3	4
Optimal visc. Algorithm 1	2.0284×10^{-3}	2.5811×10^{-3}	2.2827×10^{-3}	5.8067×10^{-2}	4.5660×10^{-2}
Optimal trace Algorithm 1	6.0377×10^4	4.3650×10^4	4.9078×10^4	1.6128×10^5	1.6156×10^5
Optimal visc. fminsearch	2.0275×10^{-3}	2.5790×10^{-3}	2.2813×10^{-3}	5.8335×10^{-2}	4.6291×10^{-2}
Optimal trace fminsearch	6.0377×10^4	4.3650×10^4	4.9078×10^4	1.6128×10^5	1.6156×10^5
Rel. error (56)	2.0499×10^{-4}	3.0910×10^{-4}	2.7175×10^{-4}	1.9799×10^{-3}	1.8297×10^{-3}
Positions(t) 21:40 + 100· t	5	6	7	8	9
Optimal visc. Algorithm 1	0.01212	2.0990×10^3	9.0360×10^3	5.2554×10^3	
Optimal trace Algorithm 1	8.8469×10^4	7.8204×10^4	3.3000×10^5	1.6797×10^5	
Optimal visc fminsearch	0.01206	2.0175×10^3	1.9739×10^3	4.8508×10^3	
Optimal trace fminsearch	8.8468×10^4	7.7174×10^4	7.7982×10^4	1.4775×10^5	
Rel. error (56)	1.3229×10^{-3}	9.8193×10^{-3}	1.1273×10^{-2}	9.3280×10^{-3}	

As can be seen from Table 4, most of the obtained approximations are satisfactory, except for the positions of the external dampers from 621 to 640 (this for $t = 7$). For this case, we need to increase the reduced (projected) dimension to $p = 400$. This leads to the following approximations:

$$\text{Opt. viscosity} = 2.0581 \times 10^3, \text{Opt. trace} = 7.8030 \times 10^4, \text{relative error(56)} = 5.1034 \times 10^{-3}.$$

6. Conclusions

This paper contains two novel results for small damped oscillations described by the vector differential equation $M\ddot{x} + C\dot{x} + Kx = 0$, where the mass matrix M can be singular, but standard deflation techniques cannot be applied. For example, $\mathcal{N}(M) \cap \mathcal{N}(C) = \emptyset$.

The first result is the novel formula for the solution X of the Lyapunov equation $A^T X + XA = -I$, where $A = A(v)$ is obtained from $M, C(v)$, and K , which are the so-called mass, damping, and stiffness matrices, respectively. These matrices are real, symmetric of order n , and $\text{rank}(M) = n - 1$. In addition, we assume that K is positive definite and $C(v)$ is positive semidefinite, with $\text{rank}(C(v)) = 1$ and no internal damping.

Using the obtained formula, we propose a novel approach for very efficiently calculating the optimal damping matrix $C_{opt} = v_{opt} d_{opt} d_{opt}^T$.

In contrast to the first part of the paper, which we refer to as the “theoretical part”, in the second part, we assumed that $\dim(\mathcal{N}(M)) \geq 1$ and $C_{in} > 0$ (usually a small percentage of the critical damping). We refer to this part as the “numerical part” or “numerical point of view”.

In said part, we presented a novel linearization, i.e., a novel construction of the matrix A in the Lyapunov equation $A^T X + XA = -I$, and a novel optimization process. The proposed optimization process computes the optimal damping $C(v)$ that minimizes a function $v \mapsto \text{trace}(ZX)$, where Z is a chosen symmetric positive semidefinite matrix, using the approximation function $g(v) = c_v + \frac{a}{v} + bv$ for the trace function $f(v) \doteq \text{trace}(ZX(v))$.

The results obtained in both parts were illustrated with several corresponding numerical examples.

Author Contributions: The individual contributions of the both authors are equal. All authors have read and agreed to the published version of the manuscript.

Funding: This research received no external funding.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Not applicable.

Acknowledgments: We would like to thank all referees for carefully reading the paper and providing useful comments that served to improve the clarity and readability of this work.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Cox, S.J. Designing for optimal energy absorption. II. The damped wave equation. In *Control and Estimation of Distributed Parameter Systems*; Birkhauser: Basel, Switzerland, 1998; pp. 103–109. [CrossRef]
2. Freitas, P.; Lancaster, P. On the optimal value of the spectral abscissa for a system of linear oscillators. *SIAM J. Matrix Anal. Appl.* **1999**, *21*, 195–208. [CrossRef]
3. Nakić, I. Optimal Damping of Vibrational Systems. Ph.D. Thesis, Fernuniversität, Hagen, Germany, 2002.
4. Brabender, K. Optimale Dämpfung von Linearen Schwingungssystemen. Ph.D. Thesis, Fernuniversität, Hagen, Germany, 1998.
5. Müller, P.C.; Gürgöze, M. Optimale Dämpfungsstärke eines viskosen Dämpfers bei einem mehrläufigen Schwingungssystem. *Z. Angew. Math. Mech.* **1991**, *71*, T60–T63.
6. Benner, P.; Tomljanović, Z.; Truhar, N. Dimension reduction for damping optimization in linear vibrating systems. *Z. Angew. Math. Mech.* **2011**, *91*, 179–191. [CrossRef]
7. Benner, P.; Tomljanović, Z.; Truhar, N. Optimal Damping of Selected Eigenfrequencies Using Dimension Reduction. *Numer. Linear Algebra Appl.* **2013**, *20*, 1–17. [CrossRef]
8. Cox, S.; Nakić, I.; Rittmann, A.; Veselić, K. Lyapunov optimization of a damped system. *Syst. Control Lett.* **2004**, *53*, 187–194. [CrossRef]
9. Cox, S.J. Designing for optimal energy absorption I: Lumped parameter systems. *ASME J. Vib. Acoust.* **1998**, *120*, 339–345. [CrossRef]
10. Truhar, N.; Tomljanović, Z.; Veselić, K. Damping optimization in mechanical systems with external force. *Appl. Math. Comput.* **2015**, *250*, 270–279. [CrossRef]
11. Veselić, K. *Damped Oscillations of Linear Systems*; Springer Lecture Notes in Mathematics; Springer: Berlin, Germany, 2011.

12. Fujita, K.; Moustafa, A.; Takewaki, I. Optimal placement of viscoelastic dampers and supporting members under variable critical excitations. *Earthq. Struct.* **2010**, *1*, 43–67. [[CrossRef](#)]
13. Mehrmann, V.; Schröder, C. Nonlinear eigenvalue and frequency response problems in industrial practice. *J. Math. Ind.* **2011**, *1*, 1–18. [[CrossRef](#)]
14. Gräbner, N.; Mehrmann, V.; Quraishi, S.; Schröder, C.; von Wagner, U. Numerical methods for parametric model reduction in the simulation of disk brake squeal. *Z. Angew. Math. Mech.* **2016**, *96*, 1388–1405. [[CrossRef](#)]
15. Kougioumtzoglou, I.; Fragkoulis, V.; Pantelous, A.; Pirrotta, A. Random vibration of linear and nonlinear structural systems with singular matrices: A frequency domain approach. *J. Sound Vib.* **2017**, *404*, 84–101. [[CrossRef](#)]
16. Truhar, N.; Veselić, K. An efficient method for estimating the optimal dampers' viscosity for linear vibrating systems using Lyapunov equation. *SIAM J. Matrix Anal. Appl.* **2009**, *31*, 18–39. [[CrossRef](#)]
17. Benner, P.; Kürschner, P.; Tomljanović, Z.; Truhar, N. Semi-active damping optimization of vibrational systems using the parametric dominant pole algorithm. *J. Appl. Math. Mech.* **2015**, *96*, 604–619. [[CrossRef](#)]
18. Truhar, N. An efficient algorithm for damper optimization for linear vibrating systems using Lyapunov equation. *J. Comput. Appl. Math.* **2004**, *172*, 169–182. [[CrossRef](#)]
19. Veselić, K. On linear vibrational systems with one dimensional damping. *J. Appl. Anal.* **1988**, *29*, 1–18. [[CrossRef](#)]
20. Veselić, K. On linear vibrational systems with one dimensional damping II. *Integral Equations Oper. Theory* **1990**, *13*, 883–897. [[CrossRef](#)]
21. Truhar, N.; Veselić, K. On some properties of the Lyapunov equation for damped systems. *Math. Commun.* **2004**, *9*, 189–197.
22. Truhar, N.; Tomljanović, Z.; Puvača, M. An Efficient Approximation For Optimal Damping In Mechanical Systems. *Int. J. Numer. Anal. Model.* **2017**, *14*, 201–217.
23. Orlando, D.; Goncalves, P.B. Hybrid nonlinear control of a tall tower with a pendulum absorber. *Struct. Eng. Mech.* **2013**, *46*, 153–177. [[CrossRef](#)]
24. Viola, E.; Guidi, F. Influence of the supporting braces on the dynamic control of buildings with added viscous dampers. *Struct. Control Health Monit.* **2008**, *16*, 267–286. [[CrossRef](#)]
25. Wang, Y.; Dyke, S. Smart system design for a 3D base-isolated benchmark building. *Struct. Control Health Monit.* **2008**, *30*, 939–957. [[CrossRef](#)]
26. Benner, P.; Tomljanović, Z.; Truhar, N. Damping Optimization for Linear Vibrating Systems Using Dimension Reduction. In Proceedings of the 10th International Conference on Vibration Problems ICOVP 2011, Prague, Czech Republic, 5–8 September 2011; pp. 297–305.
27. Veselić, K.; Brabender, K.; Delinić, K. Passive control of linear systems. In Proceedings of the 1st Conference on Applied Mathematics and Computation, Dubrovnik, Croatia, 13–18 September 1999; pp. 39–68.
28. Kunkel, P.; Mehrmann, V. *Damped Oscillations of Linear Systems*; European Mathematical Society, Publishing House: Zürich, Switzerland, 2006.
29. Campbell, S.; Ilchmann, A.; Mehrmann, V.; Reis, T. (Eds.) *Applications of Differential Algebraic Equations: Examples and Benchmarks*; Springer: Berlin, Germany, 2019.