

Article

# Prediction of Date Fruit Quality Attributes during Cold Storage Based on Their Electrical Properties Using Artificial Neural Networks Models

Maged Mohammed <sup>1,2,\*</sup>, Muhammad Munir <sup>1</sup> and Aljazi Aljabr <sup>3</sup>

<sup>1</sup> Date Palm Research Center of Excellence, King Faisal University, Al Hofuf 36362, Saudi Arabia; mmunir@kfu.edu.sa

<sup>2</sup> Department of Agricultural and Biosystems Engineering, Faculty of Agriculture, Menoufia University, Shebin El Koum 32514, Egypt

<sup>3</sup> Date Palm Research Center Al-Ahsa, Ministry of Environment, Water and Agriculture, Al Mubarratz 36321, Saudi Arabia; jazi.jabr@gmail.com

\* Correspondence: memohammed@kfu.edu.sa

**Citation:** Mohammed, M.; Munir, M.; Aljabr, A. Prediction of Date Fruit Quality Attributes during Cold Storage Based on Their Electrical Properties Using Artificial Neural Networks Models. *Foods* **2022**, *11*, 1666. <https://doi.org/10.3390/foods11111666>

Academic Editor: Juan Luis Valenzuela

Received: 4 May 2022

Accepted: 2 June 2022

Published: 6 June 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

**Abstract:** Evaluating and predicting date fruit quality during cold storage is critical for ensuring a steady supply of high-quality fruits to meet market demands. The traditional destructive methods take time in the laboratory, and the results are based on one specific parameter being tested. Modern modeling techniques, such as Machine Learning (ML) algorithms, offer unique benefits in nondestructive methods for food safety detection and predicting quality attributes. In addition, the electrical properties of agricultural products provide crucial information about the interior structures of biological tissues and their physicochemical status. Therefore, this study aimed to use an alternative approach to predict physicochemical properties, i.e., the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC) of date fruits (Tamar), during cold storage based on their electrical properties using Artificial Neural Networks (ANNs), which is the most popular ML technique. Ten date fruit cultivars were studied to collect data for the targeted parameters at different cold storage times (0, 2, 4, and 6 months) to train and test the ANNs models. The electrical properties of the date fruits were measured using a high-precision LCR (inductance, capacitance, and resistance) meter from 10 Hz to 100 kHz. The ANNs models were compared with a Multiple Linear Regression (MLR) at all testing frequencies of the electrical properties. The MLR models were less accurate than ANNs models in predicting fruit pH and had low performance and weak predictive ability for the TSS,  $a_w$ , and MC at all testing frequencies. The optimal ANNs prediction model consisted of the input layer with 14 neurons, one hidden layer with 15 neurons, and the output layer with 4 neurons, which was determined depending on the measurements of the electrical properties at a 10 kHz testing frequency. This optimal ANNs model was able to predict the pH with  $R^2 = 0.938$  and RMSE = 0.121, TSS with  $R^2 = 0.954$  and RMSE = 2.946,  $a_w$  with  $R^2 = 0.876$  and RMSE = 0.020, and MC with  $R^2 = 0.855$  and RMSE = 0.803 b by using the measured electrical properties. The developed ANNs model is a powerful tool for predicting fruit quality attributes after learning from the experimental measurement parameters. It can be suggested to efficiently predict the pH, total soluble solids, water activity, and moisture content of date fruits based on their electrical properties at 10 kHz.

**Keywords:** pH; water activity ( $a_w$ ); moisture content (MC); total soluble solids (TSS); Machine Learning (ML); Artificial Neural Networks (ANNs); Multiple Linear Regression (MLR)

## 1. Introduction

Date palm (*Phoenix dactylifera* L.) is one of the oldest fruit trees that grow widely in the Middle East and North Africa. Dates are a key source of income and a staple food for

locals in many regions where they are cultivated. They have also played an essential role in the socioeconomic and environmental conditions of those countries [1]. The demand for dates has increased significantly in date-importing countries like India, Germany, the United Kingdom, the USA, Netherlands, Canada, Spain, Italy, Belgium, and Switzerland. Given the importance of the date palm trade on a local and global scale, ensuring a continuous supply in the market is vital [2]. Therefore, it is imperative to preserve date fruits in cold storage to maintain their supply chain. The fully ripe date palm fruits (Tamar) can be stored at 0–5 °C for 6–12 months [3–6]. Stored date fruits (cv. Khalas) at freezing temperature for up to 6 months reduced fruit weights, moisture content, pH, titratable acidity ratio, and pectin, while their total soluble sugars and titratable acidity increased [7]. Date palm cvs. Sukkary and Khalas had their fruit size, water activity, pH, and redness color reduced after being stored at 5 °C for 12 months. However, fruit firmness and color (lightness and yellowness) increased [8].

Food security necessitates the storage of fruits in suitable conditions. The primary goals of fruit storage are to preserve fruits for consumption out of season, keep food in good shape, slow down fruit decaying, ensure an even supply to the market, and acquire higher pricing [9–11]. The flavor, color, texture, and nutrients of fruits are preserved when correctly stored. The most critical factors that affect the longevity of fruits after harvesting and during storage are temperature and relative humidity [12–14]. Optimal relative humidity helps prevent weight loss, the spread of fungal diseases, and physiological disorders [5,15]. Lowering these factors to a suitable level is one approach to slow down the deterioration of fruits and hence increase the fruit preservation time during storage [16,17]. Every fruit has a ‘critical temperature’ below or above where unfavorable and irreversible chemical reactions occur. Therefore, high but not saturated relative humidity is required for most stored fruits [18–23].

Many studies on the quality assessment of agricultural products before and after storage have been conducted. Fruits have substantially contributed to these studies due to their widespread production and consumption [24]. Over the last few decades, several scientists have established a variety of methodologies for evaluating the quality of agricultural products other than analytical laboratory techniques [25,26]. The quality of consumable products such as fruits and vegetables comprise multiple characteristics. Sensory properties (appearance, texture, taste, and aroma), nutritional values, physicochemical and mechanical properties, functional properties, and defects are all considered when determining the quality of a product [27]. Nondestructive methods are widely used to measure fruit and vegetable quality; it is precise and rapid, making them ideal for online applications. All production and distribution chain activists, such as insurance companies, packaging, and transportation businesses, wholesalers, and retailers, benefit from nondestructive instrumental research in fruit firmness assessment. These studies can be used to assess fruit quality, predict the best time for their harvest, classify them according to their quality degree, and detect visible and internal fruit defects [26,28–32]. The measurement of electrical properties of biological materials permitted the possibility of a solution to the challenge of nondestructive fruit quality evaluation simply and quickly [33,34]. Changes in electrical characteristics can infer interior quality changes indirectly [35]. Physical properties as indicators for food quality can be used to determine food quality through electric conductivity or resistivity measurements [33,36,37]. The electrical properties of fruits have also been studied, such as the electrical impedance, resistance, and reactance [38–40].

In agricultural products, the electrical properties of cell tissues have been studied as indicators for cell tissue integrity. The electrical characteristics of cell membranes are distinct, and when the cell membrane is disrupted, these qualities decline [39,41]. The amount of water in biological cells is critical for their structural and functional integrity [42]. Therefore, structural changes in the cell membrane are supposed to cause a decrease in cell membrane capacitance when fruit moisture is decreased [43]. Extracellular resistance has been found to decrease as cell membrane integrity deteriorates during storage [44]. Electrical impedance spectroscopy is used as a rapid indicator for the freshness of

fruit [45]. The impedance and capacitance of the cell membrane drop substantially as the electricity frequency rises [46].

The acquisition of digital data of the physicochemical properties is essential, and real-time quality monitoring is unattainable without it. The conventional procedures are time-consuming and ineffective for this cutting-edge technology. Artificial intelligence models are currently simple and have sparked interest in agriculture. Neurocomputing does not require the formulation of rules or algorithms, which affects a software's performance [47]. It is easy to collect data and monitor food quality with the Internet of Things (IoT) and industrial automation applications [48]. Artificial neural networks (ANNs) modeling has increased acceptance as an exciting approach for predicting and real-time monitoring of stored food quality parameters [49]. These models are a set of computing algorithms that can solve difficult problems or establish complex relationships between variables by simply simulating human brain techniques. The ANNs are important because of their unique information processing qualities, including nonlinearity, noise and fault tolerance, and learning and generalization [50].

The application of ANNs in food technology has an inclusive scope. It can convert electrophoretic focusing patterns and chromatographic and spectrum data into meaningful information for predicting various food products' functioning, physical, chemical, sensory, and rheological properties [51]. The ANNs, unlike other modeling techniques such as multilinear regression (MLR), can predict various parameters using multiple variables. Furthermore, these models differ from traditional modeling methods in that they can learn about the operation being represented without knowing the input variables or output parameters. Therefore, ANN applications are considered useful food quality and safety tools, such as modeling microbial growth; interpreting spectroscopic data; and predicting the food safety, physiochemical, sensory, and functional properties of food products during processing, storing, and distribution. In addition, these models are innovative techniques that offer a lot more potential for complicated modeling tasks in simulation and process control for food safety and quality management [52].

This study aimed to develop and evaluate an Artificial Neural Networks (ANNs) model to predict the most important physicochemical properties of date palm fruits, i.e., the pH, total soluble solids, moisture content, and water activity during cold storage based on their electrical properties.

## 2. Materials and Methods

### 2.1. Sampling Material

Ten cultivars of high-quality date palm fruits at Tamar stages (brown color, full ripening) were selected, i.e., Ruziez, Khodry, Khalas, Sagai, Sukkari, Sullag, Medjool, Sheshi, Ajwa, and Rushodiya. The date palm fruits were obtained from the orchard of Research and Training Station, King Faisal University, Al-Ahsa, Saudi Arabia (Latitude: 25°16'19.0344" N, Longitude: 49°42'25.8228" E) and from the Dates Packing Plant Al-Ahsa, Date Palm Research Center Al-Ahsa, Ministry of Environment, Water, and Agriculture, Kingdom of Saudi Arabia (Latitude: 25°27'54.75" N, Longitude: 49°33'49.51" E).

The obtained fruits were cleaned, air-dried, and then placed into aerated plastic containers (65 cm × 14 cm × 21 cm) and left at room temperature (25 °C) for 24 h. Then, they were transferred for storage in a cold storage room (48.8 m<sup>3</sup> total capacity) with a set-point temperature of 5 °C [5] at the Date Palm Research Center of Excellence, King Faisal University, Saudi Arabia.

### 2.2. Physicochemical Properties Determination


The physicochemical properties, i.e., the pH, total soluble solids (TSS, Brix), moisture content (MC, %), and water activity ( $a_w$ ) of the different cultivars of date palm fruit, were measured at 0, 2, 4, and 6 months of cold storage. These quality parameters of date palm

cultivars were determined in laboratories at the Date Palm Research Center Al-Ahsa, Ministry of Environment, Water, and Agriculture, Saudi Arabia. The measurements were carried out on 20 samples from each date fruit cultivar (10 cultivars) at four cold storage times (0, 2, 4, and 6 months). The total measured samples were 800 from all selected cultivars before and after the cold storage of date fruits. Therefore, 200 samples were randomly selected for measuring at each target storage time. The physicochemical properties, i.e., the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC) of the different cultivars of date palm fruit, were measured according to AOAC analysis methods [53].


The pH of the date palm fruit was determined using a pH meter (Model HI-99121, Hanna Instruments, Leighton Buzzard, Bedfordshire, UK). Next, the TSS of the date palm fruits was determined using a digital refractometer (Model 614 RFM 840, Richmond Scientific Ltd. Unit 9, Lancashire, UK). The TSS results were expressed as Brix at 25 °C. Next, the  $a_w$  of date fruits was determined using a portable water activity device (Model Aqualab Series 3, Decagon Devices, Inc., Pullman, WA, USA). Finally, the MC of the fruit was determined using a portable electronic moisture balance (Model MOC-120H, Shimadzu Corporation, Kyoto, Japan).

### 2.3. Electrical Properties Determination

The electrical properties of the same fruits were nondestructively measured in intact conditions at room temperature ( $25 \pm 0.5$  °C) before they were destructed for measuring the physicochemical properties. These electrical properties of date palm cultivars were determined in the post-harvest laboratories of the Date Palm Research Center of Excellence, King Faisal University, Al-Ahsa, Saudi Arabia. A high-precision LCR (inductance, capacitance, and resistance) meter (Model Instek LCR-6100, 10 Hz–100 kHz, Good Will Instrument Co., Ltd., Tucheng Dist., New Taipei, Taiwan) was used to measure the electrical properties of the same fruits selected to measure the physicochemical measurements (800 samples) at 10, 100, 1000, 10,000, and 100,000 Hz. The measured electrical properties were the capacitance value at the series equivalent circuit model ( $C_s$ , nF), the equivalent series resistance ( $R_s$ , k $\Omega$ ), the dissipation factor ( $D$ ), the capacitance value at the parallel equivalent circuit model ( $C_p$ , nF), the equivalent parallel resistance ( $R_p$ , k $\Omega$ ), the inductance value in the parallel equivalent circuit model ( $L_p$ , H), the inductance value in the series equivalent circuit model ( $L_s$ , H), the resistance ( $R$ , k $\Omega$ ), the reactance ( $X$ , k $\Omega$ ), the direct current resistance (DCR, k $\Omega$ ), the absolute value of the impedance ( $Z$ , k $\Omega$ ), the phase radian ( $\theta$ , rad), the phase angle ( $\theta^\circ$ , degree), and the quality factor ( $Q$ ). The LCR meter calculates  $\theta$  and  $Z$  by measuring the electrical current flowing to the fruit being measured and the voltage across the applied electrodes. It then calculated the measurement parameters, i.e.,  $C_s$ ,  $R_s$ ,  $D$ ,  $C_p$ ,  $R_p$ ,  $L_p$ ,  $L_s$ ,  $R$ ,  $X$ , DCR, and  $Q$  values. The equations employed to calculate these measurement parameters differ depending on whether the LCR meter operates in a parallel equivalent circuit mode or series equivalent circuit mode. In the case of series and parallel circuits, Figure 1 illustrates the measured electrical properties and equivalent circuits. Figure 2 shows the components of the date fruits electrical parameters measuring system. The system consists of a high precision LCR Meter, a plastic clamp with two copper electrodes, Instek LCR-06, a test lead with an alligator clip connected with the LCR meter, and a laptop. As the dielectric material, dates were placed between two conductive plate electrodes made of copper. The parameter values of electricity are monitored within a frequency range of 10 Hz to 100 kHz. The signal's input voltage was 1 volt (RMS). Each sample was measured three times and then the average was calculated. The measurements of the electrical parameters were grouped based on the physicochemical properties of date fruits to determine the correlation and regression model.

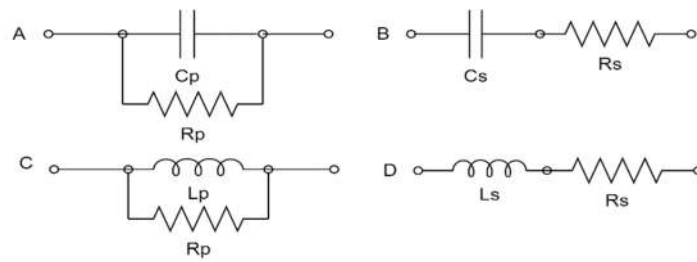


**Figure 1.** The equivalent circuits. (A) Resistor with a capacitor in a parallel circuit, (B) resistor with a capacitor in a series circuit, (C) resistor with a coil in a parallel circuit, and (D) resistor with a coil in a series circuit.

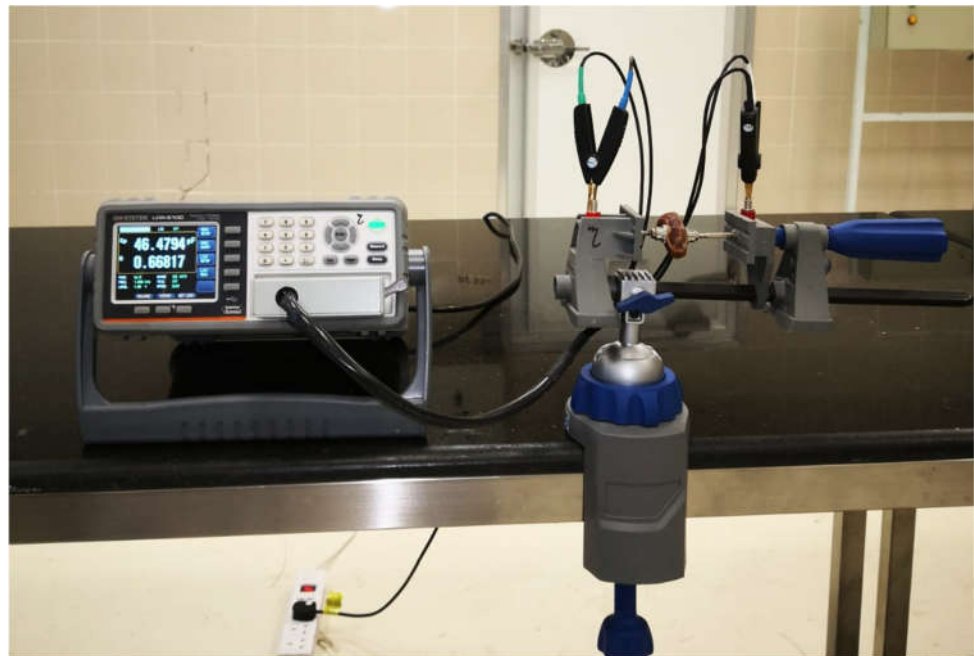

**Figure 2.** Photographic view of the measurement system to determine the electrical properties of the tested date fruits.

#### 2.4. Structure of Artificial Neural Networks

In this study, ANNs have been used as an alternative approach to predict date fruit quality attributes, i.e., the pH, TSS,  $a_w$ , and MC, of date fruits during cold storage, which are based on 14 electrical properties (i.e.,  $C_s$ ,  $R_s$ ,  $D$ ,  $C_p$ ,  $R_p$ ,  $L_p$ ,  $L_s$ ,  $R$ ,  $X$ , DCR,  $Z$ ,  $\theta$ ,  $\theta^\circ$ , and  $Q$ ). The block diagram of the applied ANNs prediction model is shown in Figure 3. The input layer acquires data obtained from the electrical properties measurement system. The hidden layer performs the data processing, and the output layer creates the continuous predicted values of the target physicochemical property. The values acquired from the input layer joined to a hidden node are multiplied by their weights, a set of predetermined values, and the outcomes, which are added to create a new value. Finally, the created value is passed as an argument to a mathematical function and an activation function to predict the target property values.

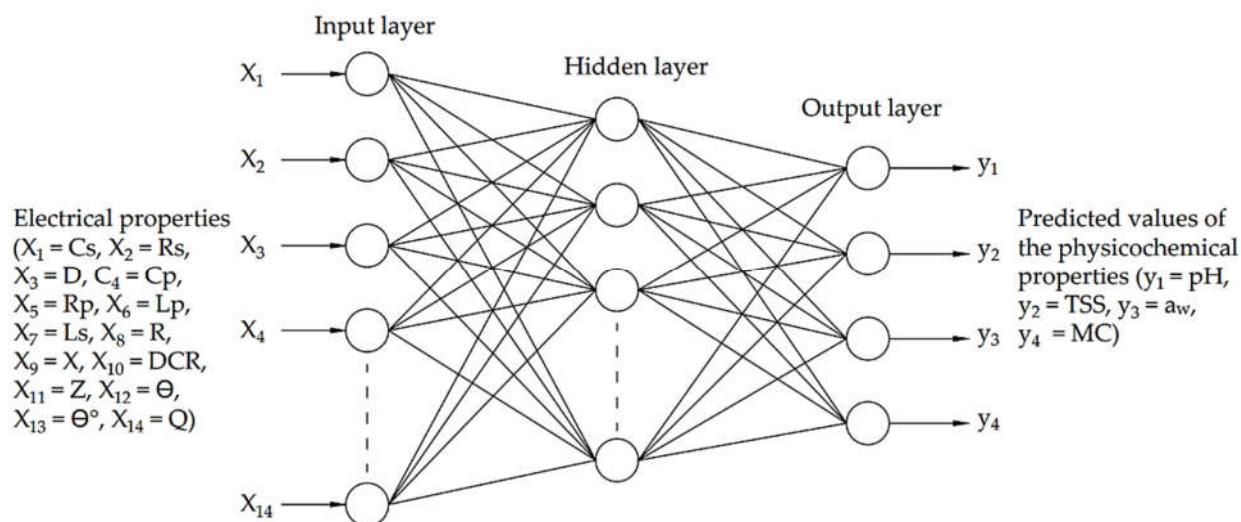

**Figure 3.** Artificial neural network architecture.

The sum of the weighted inputs entering a neural network node  $j$  and the output activation function converts a neuron's weighted value to its hyperbolic tangent (TanH) output activation function, as shown in Figure 4. The summation and the activation functions can be expressed by the following equations:

$$X_{oj} = \sum_{i=1}^n X_i W_{ij} \quad (1)$$

$$O_j = \frac{2}{1 + e^{-2X_{oj}}} - 1 \quad (2)$$


where  $X_{oj}$  is the outcome of the sum,  $X$  is the input value with  $i$  as the number of the inputs,  $W$  is the weight of the input weight, and  $O_j$  is the neuron output.

The error function depends on the values of the weights, which need to be adjusted to minimize this error. For example, for a training set  $(X_1, t_1), (X_2, t_2), \dots, (X_n, t_n)$  that consisted of  $k$  ordered pairs of  $n$ -inputs and  $m$ -outputs (the input and output patterns), the error for the neuron output and the error function of the minimizing network error can be expressed by the following equations:

$$E_j = \frac{1}{2} (O_j - t_j)^2 \quad (3)$$

$$E_j = \frac{1}{2} \sum_{j=1}^k (O_j - t_j)^2 \quad (4)$$

where  $E_j$  is the error,  $O_j$  is the output created by the input pattern from the training set, and  $t_j$  is the target value.

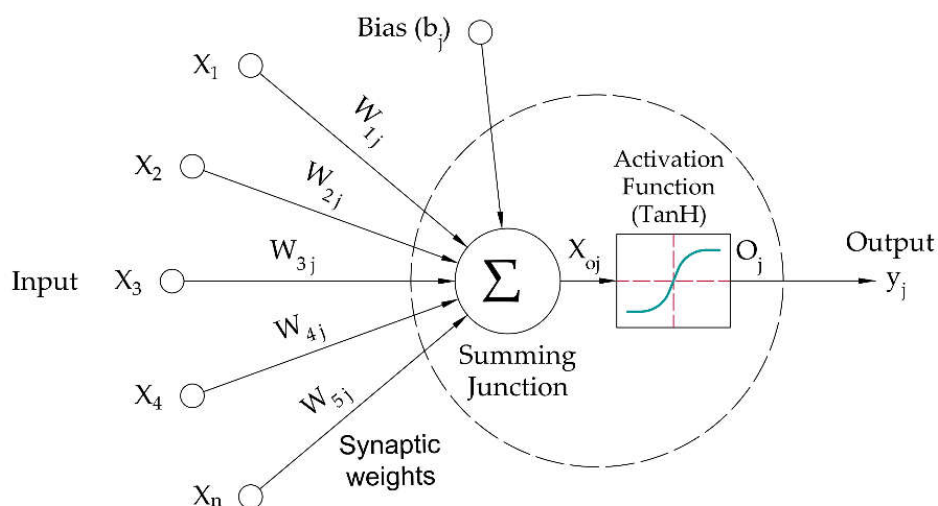

**Figure 4.** Artificial neural network active node.

Bias, denoted by  $b_j$  in Figure 4, has either an increasing effect or lowering of the net input of the activation function. Increasing the learning rate of the ANNs model accelerates the convergence around the optimal solution—then the convergence becomes impossible. Once a set of acceptable weights has been determined, the ANNs model can use another dataset with unknown output values to automatically predict the related outputs.

For conducting this study, the multilayer perceptron module of IBM SPSS Statistics 26 (IBM Corporation, Armonk, NY, USA) was used to develop ANNs models and evaluate their accuracy. The multilayer perceptron module neural networks are trained with a backpropagation learning algorithm that uses gradient descent to update the weights toward minimizing the error function. The data were randomly set to 60% for training, 20% for testing, and 20% for holdout subsets. The training dataset was used to determine the weights and construct the model; the testing data was used to determine the errors and stop overtraining in the training mode. Finally, the holdout data was used to validate the prediction ANNs model.

### 2.5. Multilinear Regression

In this study, the multilinear regression (MLR) was used to develop a model for predicting date fruit quality attributes, i.e., the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC), of the fruits during cold storage, which is based on 14 electrical properties (i.e., Cs, Rs, D, Cp, Rp, Lp, Ls, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q). The MLR function is a linear equation that can be expressed in the following formula:

$$y_i = B_0 + \sum_{i=1}^n B_i x_i \quad (5)$$

$$y = B_0 + B_1 x_1 + B_2 x_2 + \dots + B_n x_n \quad (6)$$

where  $y_i$  is the dependent variable,  $i$  is the variable's number ( $n$ ),  $x_i$  is the independent variable,  $B_0$  is the constant of the  $y$ -intercept, and  $B_i$  is the constant of the slope coefficients for each explanatory variable. The constant of the regression equations for the pH, TSS,  $a_w$ , and MC were determined using IBM SPSS Statistics 26 software.

### 2.6. Statistical Analysis and ANNs Evaluation

After measuring the physicochemical and electrical properties of different cultivars of date fruits, the data were analyzed using IBM computer software SPSS Statistics, version 26. A Tukey test was used at a 5% probability level to separate mean differences. The

values of the coefficient of determination ( $R^2$ ) and the root-mean-square error (RMSE) were used to evaluate the performance of the prediction MLR and ANNs models at the various testing frequencies. The criteria of  $R^2$  and RMSE can be expressed as follows:

$$R^2 = 1 - \frac{\sum (M_j - T_j)^2}{\sum M_j^2 - \frac{(\sum M_j)^2}{n}} \quad (7)$$

$$\text{RMSE} = \sqrt{\frac{\sum_j^n (M_j - T_j)^2}{n}} \quad (8)$$

where  $M_j$  and  $T_j$  are the measured and the predicted values, respectively, of data  $j$ , and  $n$  is the number of the measurement.

### 3. Results and Discussion

#### 3.1. Physicochemical Data

Fruit pH showed a statistically significant ( $p \leq 0.05$ ) difference among date palm cultivars, and cv. Khalas had the highest fruit pH, followed by Sukkari, Sheshi, Khodry, and Sullag (Table 1). Similarly, the TSS was maximum in cv. Khalas and minimum in cv. Salag. The lowest moisture content was recorded in cvs. Rushodiya and Sukari, which were statistically at par, whereas it was highest in cv. Sagai. The highest range of water activity was determined in cvs. Rushodiya and Sagai, followed by Khadri, which significantly decreased in cvs. Ruziez, Medjool, and Ajwa.

Previous studies have demonstrated that various date cultivars have considerable variations in fruit physicochemical attributes [23,54–56]. The pH variations can affect the fruits' flavor, aroma, texture, and shelf life due to organic acids, which change from cultivar to cultivar. Since pH levels greater than 4.6 indicate low-acidic values, the current investigation found that all date palm cultivars at the Tamar stage exhibited low-acidic qualities. It has already been reported in a few other studies that the fruit pH decreases with maturity stages, and it is lowest at the final stage of ripening [57–59]. In general, the increase in the TSS value is related to the decrease in the moisture content of the fruit [60–62].

In this study, it was observed that each cultivar of the ten tested cultivars responded individually. For example, the TSS value in cv. Khalas was 71% higher than the moisture content, which means the higher TSS value of cv. Khalas might be due to the significant decrease in moisture content from the fruit surface. The moisture content of date palm fruits declines rapidly as they ripen. For example, the fruits of certain date palm cultivars that were sold as fresh at the Rutab stage have a moisture content of less than 35%. It further decreases to less than 24% when the fruit ripened at the Tamar stage and reaches 4–10% in ripened dry date cultivars [63,64]. Similarly, date fruits with a moisture content <40% and a water activity <0.90 are generally unsuitable for microbial growth [65].

Our results indicated 15.72–21.06% of the moisture content in the date palm cultivars studies and are categorized as semi-dry cultivars. These findings coincide with those previously reported, with a few variations due to the date palm cultivars and climatic conditions [66–68]. Due to its importance as an index of date quality stability and microbial spoilage, water activity must be considered in date fruit standards. A water activity of more than 0.95 generally encourages the growth of microorganisms in fruits and vegetables [69]. Nadeem et al. [70] reported that many local and commercial date palm cultivars had a 0.32 to 0.48 water activity. Aleid et al. [8] reported a non-significant difference in water activity in date palm cultivars, i.e., Sukkary, Khalas, Sugai, and Anbara, ranging from 0.417 to 0.623. They were studied on date palm cvs. Aseel, Dhakki, Karbalain, Muzawati, and Rabai. Rashid et al. [71] determined the lowest water activity (0.680) in cv. Aseel and highest (0.795) in cv. Rabai. They stated that the product deterioration risk is minimal in cv. Aseel because of low water activity. In the present study, although the



water activity in all date palm cultivars is lower than 0.95, cvs. Ruziez, Ajwa, Medjool, Sullag, Sheshi, and Sukkari cultivars have minimal risk of microbial spoilage.

**Table 1.** Comparison of the mean values  $\pm$  standard deviation of the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC) of the ten stored date fruits cultivars.

Date Fruit Cultivars	Characteristics			
	pH	TSS (Brix)	MC (%)	$a_w$
Ruziez	5.61 $\pm$ 0.32 <sup>G</sup>	57.55 $\pm$ 13.73 <sup>B</sup>	18.34 $\pm$ 1.31 <sup>D</sup>	0.52 $\pm$ 0.12 <sup>F</sup>
Khodry	6.14 $\pm$ 0.09 <sup>D</sup>	56.07 $\pm$ 9.71 <sup>C</sup>	20.52 $\pm$ 0.91 <sup>B</sup>	0.61 $\pm$ 0.07 <sup>A</sup>
Khalas	6.56 $\pm$ 0.32 <sup>A</sup>	65.63 $\pm$ 6.56 <sup>A</sup>	19.03 $\pm$ 2.52 <sup>C</sup>	0.59 $\pm$ 0.08 <sup>B</sup>
Sagai	5.77 $\pm$ 0.18 <sup>F</sup>	44.42 $\pm$ 9.12 <sup>I</sup>	21.06 $\pm$ 0.95 <sup>A</sup>	0.62 $\pm$ 0.04 <sup>A</sup>
Sukkari	6.32 $\pm$ 0.23 <sup>B</sup>	51.28 $\pm$ 12.93 <sup>E</sup>	15.85 $\pm$ 1.47 <sup>G</sup>	0.56 $\pm$ 0.05 <sup>C</sup>
Sullag	6.05 $\pm$ 0.29 <sup>E</sup>	47.76 $\pm$ 14.12 <sup>F</sup>	18.59 $\pm$ 1.75 <sup>D</sup>	0.55 $\pm$ 0.09 <sup>CD</sup>
Medjool	5.81 $\pm$ 0.24 <sup>F</sup>	52.8 $\pm$ 11.71 <sup>D</sup>	18.57 $\pm$ 1.32 <sup>D</sup>	0.54 $\pm$ 0.06 <sup>E</sup>
Sheshi	6.23 $\pm$ 0.2 <sup>C</sup>	46.08 $\pm$ 3.82 <sup>H</sup>	17.74 $\pm$ 1.17 <sup>E</sup>	0.55 $\pm$ 0.09 <sup>CD</sup>
Ajwa	5.50 $\pm$ 0.18 <sup>H</sup>	46.64 $\pm$ 9.3 <sup>G</sup>	16.96 $\pm$ 1.3 <sup>F</sup>	0.54 $\pm$ 0.09 <sup>E</sup>
Rushodiya	5.28 $\pm$ 0.13 <sup>I</sup>	51.45 $\pm$ 8.98 <sup>E</sup>	15.72 $\pm$ 1.18 <sup>G</sup>	0.62 $\pm$ 0.08 <sup>A</sup>

The means ( $n = 80$ ) within each column with the same letters are not significantly different at  $p \leq 0.05$ .

Fruit pH was significantly decreased when date palm fruits were stored for different durations (Table 2). It was higher in unstored fruits (6.07), which decreased to 5.69 after 6 months of storage. Fruit TSS, moisture content, and water activity showed the opposite trend to pH, as these attributes increased with the increase in storage duration. Unstored fruits had a lower TSS (42.32 Brix), moisture content (17.05%), and water activity (0.49) compared to fruits stored for 6 months, which had a higher TSS (64.11 Brix), moisture content (19.49%), and water activity (0.64).

Hazbavi et al. [72] mentioned that, after storing dates (cv. Stamaran) for six months of storage, the pH was reduced by 5.4%. A 10.97% decrease in the pH of the date palm cv. Tamar fruits of date palm (cv. Khalas) stored at  $-18^\circ\text{C}$  for 6 months had the lowest pH compared to Khalal and Rutab fruits [7]. Aleid et al. [8] reported that fruit pH decreased while TSS and moisture content increased when the date fruits (cv. Khalas) were stored at  $5^\circ\text{C}$  for 12 months.

The findings of the present study showed a 6.26% reduction in the fruit pH after 6 months of storage. Microorganisms' fermentative activity results in the production of organic acids and a decrease in pH [73]. According to our study, the TSS of date palm fruits stored for 6 months increased by 51.48%. Similarly, an increase in TSS was observed in date palm cv. Barhi, which was stored for 70 days at  $0^\circ\text{C}$  and 90–95% RH [60]. The TSS increased in Tamar fruits of date palms (cv. Mazafati) stored for 180 days at  $4^\circ\text{C}$  [19]. The enzymatic conversion of large polysaccharides into small sugars would be the main reason for the increase in TSS [72]. Radi et al. [74] suggested that the increase in TSS of date fruits during storage could be related to microbial and enzymatic activities degrading high molecular weight compounds to low molecular weight ones.

Our study also showed that the moisture content and water activity of date palm fruits were increased by about 14.31% and 30.61%, respectively, after 6 months of storage. Mohammed et al. [14] recorded a 19.05% moisture content and 0.76 water activity in date fruits (cv. Khalas) stored at  $5^\circ\text{C}$  and 80% RH. Another study indicated that the moisture content was not significantly increased in cvs. Majhoul and Boufeggous, whereas TSS was increased in cv. Majhoul after 5 months of storage at  $2\text{--}4^\circ\text{C}$  and 66–68.5% RH [75]. The evaporation of fruit water caused by the relatively high temperature and moderate RH could explain the decrease in both moisture and water activity.

**Table 2.** Comparison of the mean values  $\pm$  standard deviation of the pH, total soluble solids (TSS), moisture content (MC), and water activity ( $a_w$ ) of the stored date fruits under different cold storage times.

Characteristics	Storage Time (Months)			
	0	2	4	6
pH	6.07 $\pm$ 0.45 <sup>A</sup>	6.02 $\pm$ 0.42 <sup>B</sup>	5.91 $\pm$ 0.4 <sup>C</sup>	5.69 $\pm$ 0.41 <sup>D</sup>
TSS (Brix)	42.32 $\pm$ 7.01 <sup>D</sup>	46.44 $\pm$ 6.7 <sup>C</sup>	54.99 $\pm$ 9.29 <sup>B</sup>	64.11 $\pm$ 11.09 <sup>A</sup>
MC (%)	17.05 $\pm$ 1.95 <sup>D</sup>	17.68 $\pm$ 1.8 <sup>C</sup>	18.74 $\pm$ 2.01 <sup>B</sup>	19.49 $\pm$ 2.24 <sup>A</sup>
$a_w$	0.49 $\pm$ 0.06 <sup>D</sup>	0.54 $\pm$ 0.05 <sup>C</sup>	0.61 $\pm$ 0.07 <sup>B</sup>	0.64 $\pm$ 0.07 <sup>A</sup>

The means ( $n = 800$ ) within each column with the same letters are not significantly different at  $p \leq 0.05$ .

### 3.2. Electrical Properties Data

The electrical properties of date palm fruits were determined at different frequencies and were significant at  $p \leq 0.05$  (Table 3). The measured electrical properties, such as the capacitance value (series equivalent circuit model), equivalent series resistance, dissipation factor, capacitance value (parallel equivalent circuit model), equivalent parallel resistance, resistance, and the absolute value of impedance, were very large at a low frequency (10 Hz). However, the reactance, phase radian, and phase angle electrical properties were higher at 100 Hz. As a result, the inductance value (series equivalent circuit model) was a maximum at 1000 Hz frequency, while the inductance value (parallel equivalent circuit model) was measured as higher than 100,000 Hz. The statistical difference was non-significant regarding the direct current resistance parameter; however, its value was linearly increased with the increase in frequency.

Due to the high electrical capacity of cell membranes, electrical current only flowed via extracellular fluid, which has a relatively high resistance in the low-frequency area. However, the impedance drops significantly in the high-frequency range because the current can travel through intracellular fluid, which has a low resistance. It can be seen that, as the frequency increased, the impedance decreased dramatically. Dispersion is a phenomenon in which the decrease in impedance is proportional to the increase in frequency [46]. As the frequency increased, the capacitance of the cell membrane dropped. The amount of water in biological cells is critical for their structural and functional integrity [42]. As a result, it is supposed that when fruit moisture is reduced, structural changes in the cell membrane cause a decrease in cell membrane capacitance [43]. The ion efflux across the fruit membrane produced by osmotic changes in the extracellular fluid modified the electrical properties of the cell membrane. Thus, alterations in cell membrane capacitance could have been created by ion movement caused by plasmolysis when moisture is declined [34,43]. Heat injury to plant cells causes a reduction in the capacitance of the cell membrane [40].

At low temperatures, electrode polarization was shown to account for a higher fraction of overall impedance in potatoes, but extracellular resistance and capacitances continued to decline. It could be the electrolyte leakage to the extracellular space, presumably due to membrane injury [76]. Soltani et al. [77] applied a capacitance sensing system to predict banana quality during ripening and found a good relationship between SSC and firmness at a 1 MHz frequency. Similarly, the highest inductive value was observed at 34 MHz frequency to determine the ripening time of oil palm fruit bunch [78]. The electrical impedance values of various apple cultivars rapidly decreased, which is assumed to correlate to dispersion induced by cell membrane capacitance [39,41]. Electrical current flows through the extracellular fluid at low frequencies, thereby avoiding cell membranes. At high frequencies, however, the cell membranes act as a conductor. The current flows through the intracellular fluid, which contains more electrolytes; thus, the impedance at low frequencies is higher [39,79].

**Table 3.** Comparison of the mean values  $\pm$  standard deviation of the electrical parameter of the stored date fruits under various testing frequencies. Where Cs is capacitance value (series equivalent circuit model), Rs is equivalent series resistance, D is dissipation factor, Cp is capacitance value (parallel equivalent circuit model), Rp is equivalent parallel resistance, Lp is inductance value (parallel equivalent circuit model), Ls is inductance value (series equivalent circuit model), R is resistance, X is reactance, DCR is direct current resistance, Z is the absolute value of impedance,  $\theta$  (rad) is phase radian,  $\theta^\circ$  is phase angle, and Q is the quality factor.

Parameters	Frequency (Hz)				
	10	100	1000	10,000	100,000
Cs (nF)	1916.73 $\pm$ 1926.05 <sup>A</sup>	771.77 $\pm$ 1369.47 <sup>B</sup>	40.89 $\pm$ 55.76 <sup>C</sup>	2.3 $\pm$ 3.63 <sup>C</sup>	0.3 $\pm$ 0.3 <sup>C</sup>
Rs (k $\Omega$ )	687.33 $\pm$ 738.17 <sup>A</sup>	602.25 $\pm$ 610.49 <sup>B</sup>	542.33 $\pm$ 534.54 <sup>B</sup>	389.32 $\pm$ 339.27 <sup>C</sup>	91.1 $\pm$ 51.63 <sup>D</sup>
D	28.55 $\pm$ 16.79 <sup>A</sup>	20.19 $\pm$ 12.05 <sup>B</sup>	8.86 $\pm$ 3.95 <sup>C</sup>	3.28 $\pm$ 1.71 <sup>D</sup>	1.19 $\pm$ 0.87 <sup>E</sup>
Cp (nF)	136.15 $\pm$ 159.6 <sup>A</sup>	31.52 $\pm$ 66.83 <sup>B</sup>	2.97 $\pm$ 4.84 <sup>C</sup>	1.09 $\pm$ 1.85 <sup>C</sup>	0.7 $\pm$ 1.3 <sup>C</sup>
Rp (k $\Omega$ )	646.73 $\pm$ 686.5 <sup>A</sup>	606.4 $\pm$ 616.16 <sup>AB</sup>	552.71 $\pm$ 551.47 <sup>B</sup>	468.83 $\pm$ 456.8 <sup>C</sup>	308.34 $\pm$ 264.8 <sup>D</sup>
Lp (H)	−1422.6 $\pm$ 1641 <sup>C</sup>	−1261.5 $\pm$ 2214 <sup>C</sup>	−725.71 $\pm$ 592.5 <sup>B</sup>	−34.98 $\pm$ 51.45 <sup>A</sup>	−29.31 $\pm$ 97.31 <sup>A</sup>
Ls (H)	−464.63 $\pm$ 617.51 <sup>C</sup>	−86.85 $\pm$ 123.01 <sup>B</sup>	−11.67 $\pm$ 14.8 <sup>A</sup>	−65.5 $\pm$ 209.08 <sup>B</sup>	−12.77 $\pm$ 42.96 <sup>A</sup>
R (k $\Omega$ )	640.7 $\pm$ 677.13 <sup>A</sup>	605.6 $\pm$ 613.19 <sup>AB</sup>	547.58 $\pm$ 537.3 <sup>B</sup>	391.56 $\pm$ 339.1 <sup>C</sup>	94.59 $\pm$ 53.75 <sup>D</sup>
X (k $\Omega$ )	−110.84 $\pm$ 330.09 <sup>B</sup>	−65.09 $\pm$ 104.27 <sup>A</sup>	−103.71 $\pm$ 137.53 <sup>B</sup>	−163.82 $\pm$ 203.84 <sup>C</sup>	−130.02 $\pm$ 103.78 <sup>B</sup>
DCR (k $\Omega$ )	681.48 $\pm$ 698.49 <sup>A</sup>	689.85 $\pm$ 709.44 <sup>A</sup>	705.66 $\pm$ 726.77 <sup>A</sup>	708.08 $\pm$ 728.74 <sup>A</sup>	713.14 $\pm$ 730.99 <sup>A</sup>
Z (k $\Omega$ )	642.84 $\pm$ 679.61 <sup>A</sup>	614.38 $\pm$ 619.67 <sup>AB</sup>	554.67 $\pm$ 547.39 <sup>B</sup>	454.89 $\pm$ 452.38 <sup>C</sup>	164.41 $\pm$ 111.08 <sup>D</sup>
$\theta$ (rad)	−0.14 $\pm$ 0.12 <sup>B</sup>	−0.11 $\pm$ 0.08 <sup>A</sup>	−0.16 $\pm$ 0.07 <sup>B</sup>	−0.41 $\pm$ 0.18 <sup>C</sup>	−0.86 $\pm$ 0.26 <sup>D</sup>
$\theta^\circ$	−8.17 $\pm$ 6.75 <sup>B</sup>	−6.32 $\pm$ 4.48 <sup>A</sup>	−9.06 $\pm$ 4.26 <sup>B</sup>	−23.45 $\pm$ 10.27 <sup>C</sup>	−48.74 $\pm$ 14.74 <sup>D</sup>
Q	0.16 $\pm$ 0.13 <sup>C</sup>	0.44 $\pm$ 1.11 <sup>B</sup>	0.17 $\pm$ 0.08 <sup>C</sup>	0.47 $\pm$ 0.25 <sup>B</sup>	1.27 $\pm$ 0.6 <sup>A</sup>

The means ( $n = 610$  for Lp parameter at 10 Hz,  $N = 649$  for Lp parameter at 100 Hz,  $n = 800$  for Lp at 1000, 10,000, and 100,000,  $n = 800$  for other electrical parameters) within each column with the same letters are not significantly different at  $p \leq 0.05$ .

Table 4 shows that the average values of important electrical properties of date palm fruits were significantly ( $p \leq 0.05$ ) varied at different storage durations (0, 2, 4, and 6 months). The fruits before storage showed higher values regarding series resistance, dissipation factor, parallel resistance, resistance, direct current resistance, the absolute value of impedance, phase radian, and phase angle. However, there was a non-significant difference in the phase radian and phase angle parameters between before storage and 2 months of storage fruits. The maximum quality factor value was observed in fruits stored for 4 months, followed by 6 months of storage fruits and before storage fruits. The capacitance value (series equivalent circuit model), capacitance value (parallel equivalent circuit model), inductance value (parallel equivalent circuit model), inductance value (series equivalent circuit model), and reactance were maximal after 6 months of cold storage fruits. However, there was a non-significant difference in the capacitance value (series equivalent circuit model) and capacitance value (parallel equivalent circuit model) parameters between 4 and 6 months of stored fruits.

Different researchers reported that fruit electrical conduction increases with temperature, field strength, storage duration, sugar concentration, and fruit firmness [38,80–84]. Watanabe et al. [39] stated that the initial resistance and reactance values of apple fruit varied by cultivar and declined as storage duration increased. The non-uniformity of electrical characteristics was attributed to non-uniform conditions, such as differences in cell size or shape between cultivars. They also stated that the LTO, which relates to the resistance of the extracellular parts of the fruit, declined after four weeks of storage and then increased. However, it decreased after 16 weeks of storage in some apple cultivars. Our study indicated that resistance decreased with the increase in storage duration. Extracellular resistance has been reported to decrease in vegetables due to the degradation of cell membrane integrity during storage [44,85]. It is assumed that the electrical resistance increase in apples after storage was caused by water transpiration during storage [86]. The

water activity and moisture content of apples significantly impacted dielectric characteristics during storage. Therefore, the change in electrical parameters can be used to indirectly reflect changes in internal quality [35]. Jiangjie et al. [87] found that a frequency of 39.8 kHz could be used for nondestructive post-harvest quality detection for new red star apples, and that the absolute value of impedance, equivalent parallel resistance, and capacitance could be used as sensitive electrical parameters to indicate quality parameter changes during the ripening and senescence. According to Sastry [88], electrical conduction increases with storage duration and the difference was negligible when the temperature is changed. In the present study, electrical parameters such as capacitance, dissipation factor, inductance, and reactance increased with the increased storage time.

**Table 4.** Comparison of the mean values  $\pm$  standard deviation of the electrical parameter of the stored date fruits under different cold storage times.

Parameters	Storage Time (Months)			
	0	2	4	6
Cs (nF)	287.35 $\pm$ 785.39 <sup>B</sup>	418.68 $\pm$ 927.34 <sup>B</sup>	682.6 $\pm$ 1459.09 <sup>A</sup>	796.96 $\pm$ 1709.89 <sup>A</sup>
Rs (k $\Omega$ )	725.08 $\pm$ 728.62 <sup>A</sup>	515.7 $\pm$ 525.32 <sup>B</sup>	400.64 $\pm$ 426.96 <sup>C</sup>	208.44 $\pm$ 321.16 <sup>D</sup>
D	17.46 $\pm$ 18.78 <sup>A</sup>	13.17 $\pm$ 13.66 <sup>B</sup>	11.49 $\pm$ 11.33 <sup>C</sup>	7.53 $\pm$ 8.55 <sup>D</sup>
Cp (nF)	20 $\pm$ 70.79 <sup>B</sup>	27.05 $\pm$ 61.87 <sup>B</sup>	42.39 $\pm$ 98.19 <sup>A</sup>	48.49 $\pm$ 125.91 <sup>A</sup>
Rp (k $\Omega$ )	809.45 $\pm$ 703.16 <sup>A</sup>	575.89 $\pm$ 507.79 <sup>B</sup>	447.81 $\pm$ 415.44 <sup>C</sup>	233.32 $\pm$ 324.18 <sup>D</sup>
Lp (H)	−841.67 $\pm$ 1700 <sup>C</sup>	−597.43 $\pm$ 1155.3 <sup>AB</sup>	−642.08 $\pm$ 1219.2 <sup>B</sup>	−508.65 $\pm$ 1213.8 <sup>A</sup>
Ls (H)	−155.74 $\pm$ 231.36 <sup>B</sup>	−127.86 $\pm$ 323.04 <sup>AB</sup>	−127.79 $\pm$ 314.91 <sup>AB</sup>	−101.73 $\pm$ 290.9 <sup>A</sup>
R (k $\Omega$ )	715.97 $\pm$ 702.6 <sup>A</sup>	508.86 $\pm$ 506.09 <sup>B</sup>	394.65 $\pm$ 410.81 <sup>C</sup>	204.6 $\pm$ 310.65 <sup>D</sup>
X (k $\Omega$ )	−134.65 $\pm$ 174.08 <sup>B</sup>	−112.78 $\pm$ 135.64 <sup>AB</sup>	−115.95 $\pm$ 199.72 <sup>AB</sup>	−95.41 $\pm$ 260.1 <sup>A</sup>
DCR (k $\Omega$ )	1059.65 $\pm$ 928.51 <sup>A</sup>	767.66 $\pm$ 672.26 <sup>B</sup>	619.92 $\pm$ 553.36 <sup>C</sup>	351.33 $\pm$ 430.64 <sup>D</sup>
Z (k $\Omega$ )	763.3 $\pm$ 714.42 <sup>A</sup>	542.55 $\pm$ 514.96 <sup>B</sup>	420.84 $\pm$ 418.87 <sup>C</sup>	218.28 $\pm$ 320.59 <sup>D</sup>
$\theta$ (rad)	−0.28 $\pm$ 0.35 <sup>A</sup>	−0.29 $\pm$ 0.3 <sup>A</sup>	−0.38 $\pm$ 0.33 <sup>B</sup>	−0.39 $\pm$ 0.3 <sup>B</sup>
$\theta^\circ$	−15.87 $\pm$ 19.91 <sup>A</sup>	−16.62 $\pm$ 17.04 <sup>A</sup>	−21.79 $\pm$ 18.6 <sup>B</sup>	−22.32 $\pm$ 16.86 <sup>B</sup>
Q	0.48 $\pm$ 0.91 <sup>AB</sup>	0.46 $\pm$ 0.69 <sup>B</sup>	0.54 $\pm$ 0.65 <sup>A</sup>	0.52 $\pm$ 0.53 <sup>AB</sup>

The means ( $n = 720$  for Lp parameter at 0,  $n = 979$  for Lp parameter at 2-months,  $n = 980$  for Lp parameter at 4 and 6-months,  $n = 1000$  for all other parameters) within each column with the same letters are not significantly different at  $p \leq 0.05$ .

### 3.3. Correlation between Physicochemical and Electrical Properties

Table 5 shows the correlation between the fruit physicochemical traits, such as pH, TSS, moisture content, and water activity. The electric parameters at various frequencies vary significantly, either positively or negatively. At a low frequency (10 Hz), there was a significant positive correlation between pH, inductance value (parallel), and inductance value (series); and TSS, moisture content, and water activity with capacitance value (parallel) and quality factor. Similarly, at 100 Hz frequency, pH had a strong positive correlation with dissipation, phase radian, phase angle, and quality factor. The electrical parameters, inductance value (parallel) and inductance value (series), had a better positive correlation with TSS and moisture content.

In contrast, water activity positively correlated with inductance value (parallel) at 1000 Hz frequency. The electric parameter reactance was positively correlated with pH and moisture content at a 10,000 Hz frequency. At a high frequency (100,000 Hz), fruit pH was positively correlated with equivalent series resistance, capacitance value (parallel), equivalent parallel resistance, resistance, and the absolute value of impedance; fruit TSS with capacitance value (series) and reactance; moisture content with capacitance value (series), phase radian, and phase angle; and water activity with capacitance value (series), dissipation factor, inductance value (series), reactance, phase radian, and phase angle.

The electrical resistance showed a significant decline as the citrus fruit matured and was closely correlated to the changes in pH [89]. Our results showed a negative correlation

of resistance when correlated with pH, TSS, moisture content, and water activity. However, it positively correlated with pH when the frequency was 10,000 and 100,000 Hz. A reduced resistance is also linked to a reduction in hardness and TSS rise [90]. Soltani et al. [77] found a correlation between the soluble solid contents, firmness of the fruit, and the capacitance sensing system parameters. There was a strong correlation between the quality parameters and the relative permittivity of the capacitive property. Citrus tissues found a linear relationship between the matrix moisture content and the dielectric constant  $\gamma$ -relaxation was found in citrus tissues. They indicated that the dielectric constant under  $\gamma$ -relaxation is an important tool for predicting the moisture content of citrus fruit [91]. The highest correlation with various frequencies predicted the quality parameters of the damaged apples [92]. The cell wall, membranes, and composition of the cell contents may all undergo significant modifications during storage. All these alterations would have an impact on tissue capacitance. A change in reactance can be used to indicate changes in capacitance. The impedance values will change when the resistance and reactance parameters change. As a result, its relationship with physicochemical properties will be comparable. During the storage of date fruits, the value of resistance and reactance decreased, lowering the value of its impedance [93].

**Table 5.** The correlation between the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC) of the stored date fruits and the electrical parameters at various frequencies.

		Cs	Rs	D	Cp	Rp	Lp	Ls	R	X	DCR	Z	$\theta$	$\theta^\circ$	Q
pH	10	-0.063	-0.120 **	0.375 **	-0.144 **	-0.140 **	0.0054	0.307 **	-0.125 **	-0.087 *	-0.133 **	-0.123 **	0.423 **	0.427 **	-0.406 **
	100	-0.223 **	-0.082 *	0.722 **	0.461 **	-0.086 *	-0.222 **	0.0062	-0.082 *	0.128 **	-0.126 **	-0.075 *	0.483 **	0.496 **	0.129 **
	1000	-0.280 **	-0.063	0.420 **	0.498 **	-0.077 *	-0.167 **	0.234 **	-0.062	0.0047	-0.125 **	-0.067	0.306 **	0.350 **	-0.304 **
	10,000	-0.383 **	0.0061	0.235 **	0.540 **	-0.0042	-0.0051	0.0026	0.0065	0.154 **	-0.120 **	-0.069	0.281 **	0.265 **	-0.223 **
	100,000	-0.454 **	0.325 **	0.176 **	0.559 **	0.111 **	0.027	0.030	0.374 **	-0.170 **	-0.069	0.237 **	0.059	0.076 *	-0.104 **
TSS	10	0.236 **	-0.307 **	-0.589 **	0.378 **	-0.302 **	-0.193 **	0.078 *	-0.322 **	-0.200 **	-0.305 **	-0.325 **	-0.621 **	-0.623 **	0.591 **
	100	0.231 **	-0.347 **	-0.189 **	0.292 **	-0.346 **	0.425 **	0.077 *	-0.349 **	-0.0021	-0.321 **	-0.351 **	-0.433 **	-0.433 **	-0.220 **
	1000	0.395 **	-0.368 **	-0.153 **	0.229 **	-0.362 **	0.439 **	0.279 **	-0.369 **	0.0011	-0.324 **	-0.366 **	-0.337 **	-0.360 **	0.339 **
	10,000	0.249 **	-0.410 **	-0.285 **	0.204 **	-0.366 **	0.250 **	0.120 **	-0.414 **	0.292 **	-0.328 **	-0.361 **	-0.435 **	-0.430 **	0.429 **
	100,000	0.618 **	-0.658 **	-0.116 **	0.172 **	-0.421 **	0.110 **	0.117 **	-0.665 **	0.444 **	-0.334 **	-0.542 **	-0.071 *	-0.080 *	0.007
MC	10	-0.160 **	-0.500 **	-0.293 **	0.102 **	-0.487 **	-0.225 **	0.270 **	-0.493 **	0.178 **	-0.465 **	-0.487 **	-0.504 **	-0.507 **	0.489 **
	100	-0.078 *	-0.492 **	-0.400 **	-0.0028	-0.489 **	0.0068	0.408 **	-0.488 **	0.402 **	-0.466 **	-0.491 **	-0.440 **	-0.434 **	-0.018
	1000	0.049	-0.497 **	-0.370 **	-0.0038	-0.492 **	0.495 **	0.448 **	-0.501 **	0.434 **	-0.477 **	-0.500 **	-0.415 **	-0.446 **	0.413 **
	10,000	0.092 **	-0.492 **	-0.233 **	-0.0056	-0.497 **	0.153 **	0.0022	-0.497 **	0.484 **	-0.479 **	-0.511 **	-0.234 **	-0.224 **	0.244 **
	100,000	0.367 **	-0.366 **	-0.109 **	-0.080 *	-0.500 **	0.020	0.025	-0.395 **	0.469 **	-0.479 **	-0.475 **	0.120 **	0.115 **	-0.213 **
$a_w$	10	0.186 **	-0.258 **	-0.644 **	0.268 **	-0.255 **	-0.159 **	-0.088 *	-0.265 **	-0.0039	-0.244 **	-0.270 **	-0.643 **	-0.637 **	0.623 **
	100	0.164 **	-0.310 **	-0.403 **	-0.004	-0.309 **	0.070	0.071 *	-0.311 **	0.0010	-0.254 **	-0.302 **	-0.574 **	-0.575 **	-0.153 **
	1000	0.292 **	-0.322 **	-0.290 **	-0.030	-0.319 **	0.487 **	0.168 **	-0.324 **	0.082 *	-0.249 **	-0.320 **	-0.524 **	-0.484 **	0.510 **
	10,000	0.299 **	-0.438 **	-0.224 **	-0.064	-0.350 **	0.324 **	0.174 **	-0.441 **	0.217 **	-0.252 **	-0.329 **	-0.378 **	-0.399 **	0.437 **
	100,000	0.610 **	-0.689 **	0.086 *	-0.096 **	-0.427 **	0.174 **	0.177 **	-0.616 **	0.513 **	-0.254 **	-0.568 **	0.076 *	0.089 *	-0.120 **


\* The correlation is significant at the 0.5 level. \*\* The correlation is significant at the 0.01 level (2-tailed).

### 3.4. ANNs and MLR Models

The ANNs technique in SPSS was adopted to determine the optimal prediction model at different testing frequencies. The number of hidden layers was one for all ANNs at the various testing frequencies. The input layer in the ANNs at 10 and 100 Hz contains 13 neurons for the independent variables (Cs, Rs, D, Cp, Rp, Ls, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q), and the optimal hidden layers contain 12 neurons at 10 Hz and 14 neurons at 100 Hz. The input layer in the ANNs at 1000, 10,000, and 100,000 Hz contains 14 neurons for the independent variables (Cs, Rs, D, Cp, Rp, Ls, Lp, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q), and the optimal hidden layers contain 15 neurons. The output layer contains four neurons for the dependent variables (pH, TSS,  $a_w$ , and MC). The rescaling method for covariates was standardized. The activation function applied for the hidden layers was a hyperbolic tangent. The activation function applied for the output layers was Identity for all ANNs models at the different testing frequencies. About 60% of the measured data were used as a

training dataset, 20% for model testing, and 20% for evaluation. The sum of squares was used as an error function because of the Identity function.


Figure 5 shows the optimal ANNs diagram applied to predict the pH, TSS,  $a_w$ , and MC of the date fruits during cold storage based on their electrical properties at 10,000 Hz. The diagram shows the 14 input nodes (Cs, Rs, D, Cp, Rp, Ls, Lp, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q), the 15 hidden nodes, and the 4 output nodes representing the predicted values of the target physicochemical properties (pH, TSS,  $a_w$ , and MC). The trained ANNs quickly determine the target physicochemical properties when fed the system's electrical properties data.

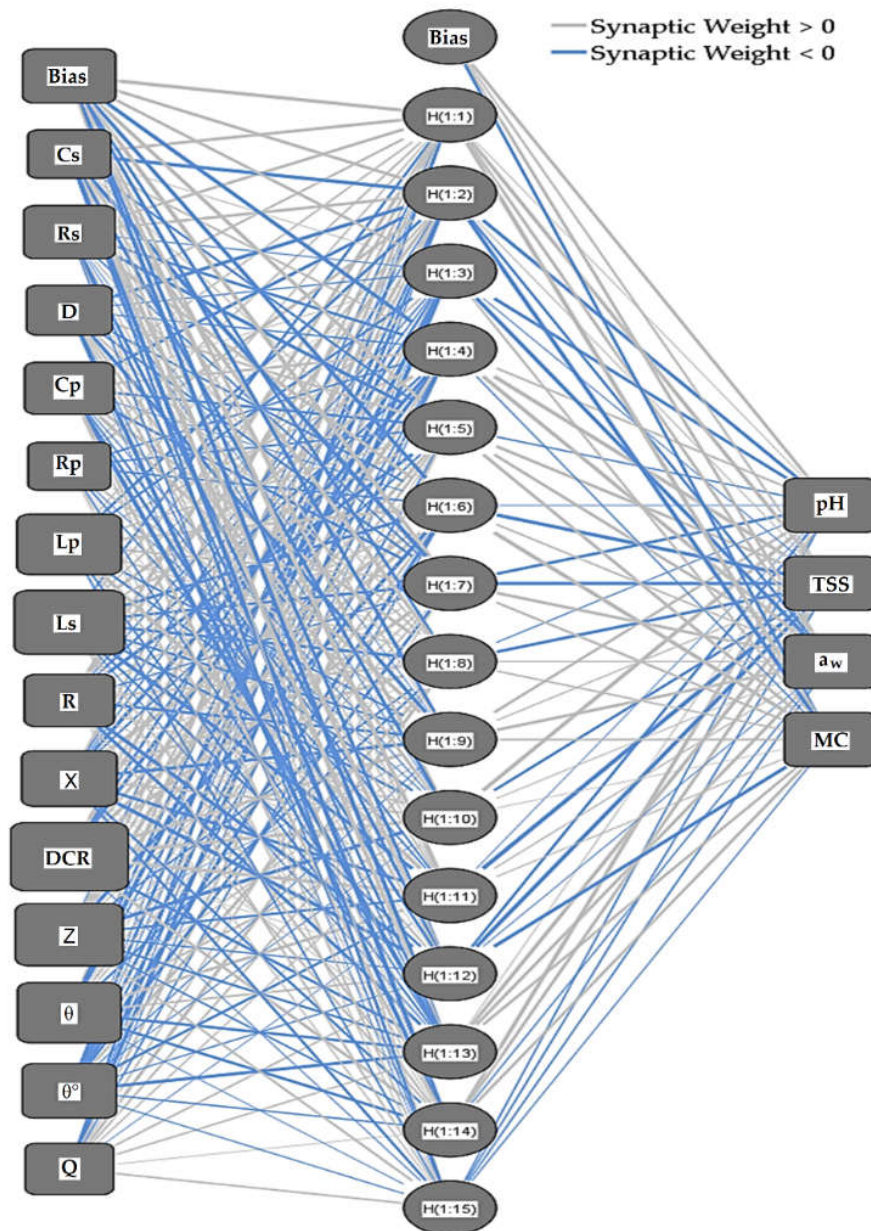

**Figure 5.** Network diagram of the ANNs prediction model to predict the pH, TSS,  $a_w$ , and MC of the date fruits during cold storage based on their electrical properties (Cs, Rs, D, Cp, Rp, Ls, Lp, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q) at 10,000 Hz. The hidden layer activation function is Hyperbolic tangent, and the output layer function is Identity.

Figure 6 shows the importance of the independent variables (Cs, Rs, D, Cp, Rp, Ls, Lp, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q) at 10,000 Hz in the ANNs model in terms of the relative and normalized importance. This figure displays the impact of the change of each independent variable on the ANNs prediction model. The variables related to DCR, Ls, Z, Lp,  $\theta$ , X, and  $\theta^\circ$  have the most critical effect on how the network predicts the values of the dependent variables, i.e., pH, TSS,  $a_w$ , and MC at 10,000 Hz.

Table 6 displays the comparison between error results of the ANNs models, i.e., the sum of squares error, average overall relative error, and relative error in the training, testing, and holdout phases at various testing frequencies. In addition, relative errors were displayed depending on the dependent variables of the pH, TSS,  $a_w$ , and MC measurement levels. From Table 1, it is noticed that the values of the electrical parameters at 10,000 Hz gave better results regarding the model errors in the phases of training, testing, and holdout datasets. Based on these results, adopting electrical measurements of dates at 10,000 Hz can successfully predict the pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content of the date fruits during cold storage.

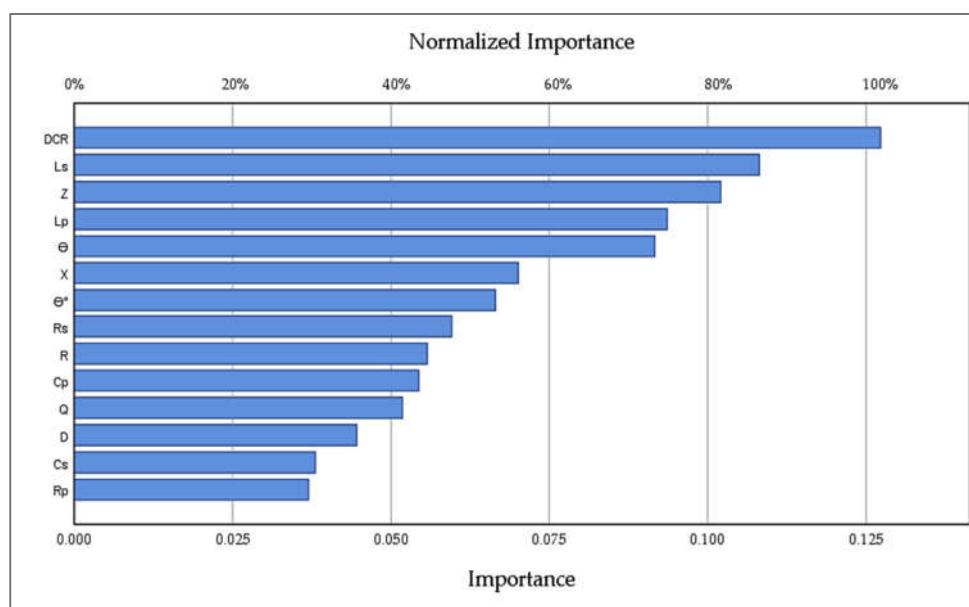

**Figure 6.** Importance of the independent variable electrical properties (Cs, Rs, D, Cp, Rp, Ls, Lp, R, X, DCR, Z,  $\theta$ ,  $\theta^\circ$ , and Q) at 10,000 Hz.

**Table 6.** A comparison between the ANNs models' errors in the training, testing, and holdout phases at various frequencies.

Phases		Frequency (Hz)				
		10	100	1000	10,000	100,000
Training	Sum of squares error	130.82	135.43	101	96.1	102
	Average overall relative error	0.133	0.142	0.107	0.098	0.108
	pH	0.122	0.120	0.079	0.058	0.075
	TSS	0.083	0.106	0.054	0.044	0.067
	MC	0.144	0.165	0.155	0.161	0.153
	$a_w$	0.183	0.177	0.139	0.128	0.137
Testing	Sum of Squares Error	39.657	51.039	36.098	28.304	36.408
	Average overall relative error	0.140	0.172	0.121	0.098	0.119
	pH	0.125	0.153	0.070	0.078	0.081
	TSS	0.084	0.143	0.075	0.053	0.084
	MC	0.165	0.206	0.184	0.143	0.161
	$a_w$	0.188	0.182	0.146	0.113	0.158

Holdout	Average overall relative error		0.152	0.145	0.158	0.101	0.139
		pH	0.160	0.163	0.120	0.082	0.105
	Relative error	TSS	0.117	0.107	0.116	0.055	0.103
		MC	0.151	0.153	0.210	0.144	0.175
		$a_w$	0.188	0.153	0.183	0.121	0.167

The  $R^2$  and RMSE related to the MLR models for predicting the pH, TSS,  $a_w$ , and MC parameters under the testing frequencies are presented in Table 7. The F-test showed that several independent variables in the MLR for pH property are significant ( $p \leq 0.05$ ) at 10,000 Hz.

The MLR prediction models for pH values based on the electrical parameters at 100 Hz ( $R^2 = 0.813$ , RMSE = 0.289), 1000 Hz ( $R^2 = 0.842$ , RMSE = 0.176), 10,000 Hz ( $R^2 = 0.843$ , RMSE = 0.175) are characterized by a significative determination coefficient, which can be used as a significative predictive model at one of these frequencies. The other MLR models were characterized by low  $R^2$  and high RMSE values. Therefore, the MLR models are considered unsuitable for accurately evaluating the TSS,  $a_w$ , and MC.

The prediction models using the MLR technique based on the electrical properties measured by a 10,000 Hz frequency are the best for all target properties of pH, TSS,  $a_w$ , and MC.

The developed MLR prediction models for pH, TSS,  $a_w$ , and MC at 10,000 Hz that acquired the best results are given below:

$$\text{pH} = 6.146 - 0.058 \times \text{Cs} + 0.003 \times \text{Rs} + 0.105 \times \text{D} + 0.155 \times \text{Cp} - 0.035 \times \text{Lp} + 0.008 \times \text{Ls} - 0.013 \times \text{X} + 0.001 \times \text{DCR} - 0.01 \times \text{Z} - 0.126 \times \theta + 0.064 \times \theta^\circ + 1.949 \times \text{Q}$$

$$\text{TSS} = 57.303 + 0.788 \times \text{Cs} - 0.062 \times \text{Rs} - 2.151 \times \text{D} + 1.784 \times \text{Cp} - 1.755 \times \text{Lp} + 0.413 \times \text{Ls} - 0.544 \times \text{X} - 0.104 \times \text{DCR} - 0.09 \times \text{Z} - 231.5 \times \theta + 3.51 \times \theta^\circ + 2.749 \times \text{Q}$$

$$a_w = 0.583 + 0.006 \times \text{Cs} + 0.0001 \times \text{Rs} - 0.011 \times \text{D} + 0.011 \times \text{Cp} - 0.006 \times \text{Lp} + 0.001 \times \text{Ls} - 0.001 \times \text{X} + 0.0001 \times \text{DCR} - 0.001 \times \text{Z} + 1.283 \times \theta - 0.027 \times \theta^\circ - 0.114 \times \text{Q}$$

$$\text{MC} = 23.5 + 0.052 \times \text{Cs} - 0.003 \times \text{Rs} - 0.915 \times \text{D} + 0.011 \times \text{Cp} + 0.134 \times \text{Lp} - 0.031 \times \text{Ls} + 0.065 \times \text{X} + 0.014 \times \text{DCR} + 0.009 \times \text{Z} - 36.349 \times \theta + 0.869 \times \theta^\circ + 0.114 \times \text{Q}$$

The performance of the ANNs and MLR prediction models at various frequencies based on  $R^2$  and RMSE values in the evaluation set is shown in Table 7. The high  $R^2$  and low values of RMSE indicated that the ANNs models present promising possibilities to predict the target physicochemical properties of date fruits based on their electrical properties. Based on  $R^2$  and RMSE in Table 7, it is shown that the ANNs modeling techniques were more efficient compared with the MLR models for predicting the pH, TSS,  $a_w$ , and MC values at all testing frequencies. The results showed that the  $R^2$  for ANNs models at frequencies of 1000, 10,000, and 10,0000 Hz was more acceptable than the ANNs models at 10 and 100 Hz. The high values of  $R^2$  were obtained for pH ( $R^2 = 0.938$ ), TSS ( $R^2 = 0.954$ ),  $a_w$  ( $R^2 = 0.876$ ), and MC ( $R^2 = 0.855$ ) in the evaluation set of ANNs models based on the measured electrical properties of the stored date fruits at 10,000 Hz. Furthermore, the low values of RMSE were obtained also at 10,000 Hz for the pH (RMSE = 0.121), TSS (RMSE = 2.946),  $a_w$  (RMSE = 0.020), and MC (RMSE = 0.803) in the evaluation set of ANNs models.


Generally, based on these results, the MLR models had lower performance and weaker predictive ability than ANNs for predicting pH, TSS,  $a_w$ , and MC at various frequencies (Table 7). Based on these results, the MLR models are unsuitable for predicting the target properties and show a relative disadvantage because they only describe the linear relationship between variables.




**Table 7.** Comparison between values of  $R^2$  and RMSE for the developed ANNs and MLR models in the evaluation phase at various frequencies.

Properties	Models	Frequency (Hz)									
		10		100		1000		10,000		100,000	
		$R^2$	RMSE	$R^2$	RMSE	$R^2$	RMSE	$R^2$	RMSE	$R^2$	RMSE
pH	ANNs	0.878	0.14	0.871	0.191	0.924	0.122	0.938	0.121	0.924	0.129
	MLR	0.573	0.289	0.813	0.289	0.842	0.176	0.843	0.175	0.746	0.222
TSS (Brix)	ANNs	0.919	3.79	0.886	7.542	0.927	3.451	0.954	2.946	0.929	3.469
	MLR	0.734	6.215	0.609	6.215	0.563	7.975	0.735	6.208	0.76	5.903
$a_w$	ANNs	0.816	0.034	0.823	0.039	0.862	0.026	0.876	0.02	0.859	0.024
	MLR	0.704	0.047	0.689	0.047	0.741	0.044	0.787	0.047	0.729	0.045
MC (%)	ANNs	0.853	0.852	0.826	1.239	0.841	0.816	0.855	0.803	0.844	0.816
	MLR	0.656	1.297	0.676	1.297	0.583	1.267	0.686	1.387	0.617	1.369

Figure 7 presents the scatter plots of the measured values of pH, TSS,  $a_w$ , and MC of the stored date fruits versus the predicted values by the neural networks model in the evaluation phase based on the measured electrical properties of the stored date fruits at 10,000 Hz. The network structure of the model was one hidden layer and 14 neurons, which exhibited the highest level of accuracy. The prediction error in the training and testing phases at 10,000 Hz was lower than in the same phases at other frequencies. The results displayed that the ANNs model at 10,000 Hz was more accurate than the various frequencies in the evaluation phase. The regression line between the predicted and the observed values of the target properties, i.e., pH ( $y = 0.38 + 0.94 x$ ), TSS ( $y = 1.87 + 0.96 x$ ),  $a_w$  ( $y = 0.09 + 0.84 x$ ), and MC ( $y = 2.36 + 0.87 x$ ) at validation sets, nearly overlapped the 1:1 line ( $y = x + 0$ ).

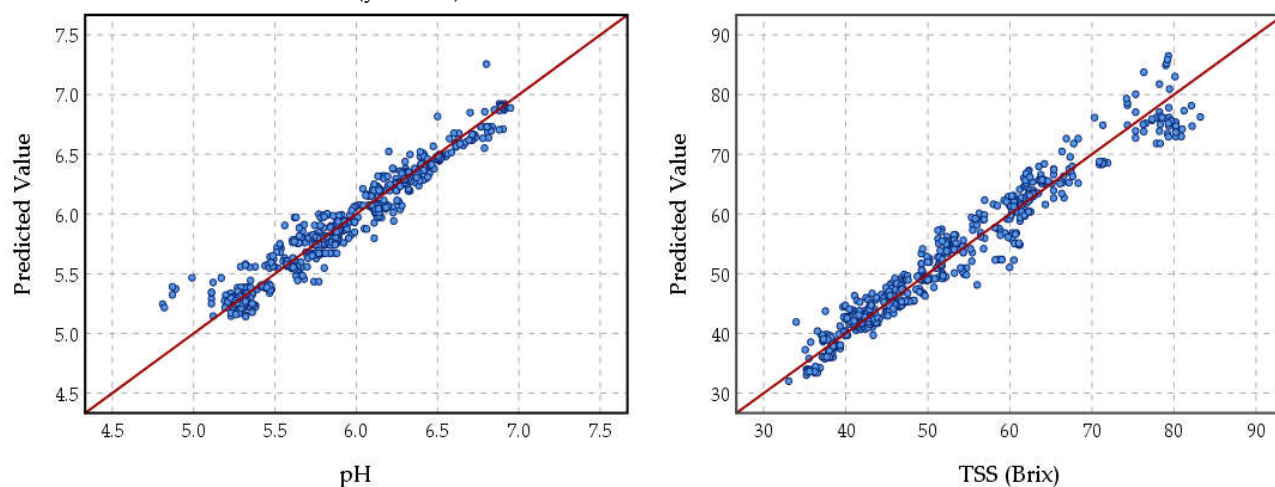

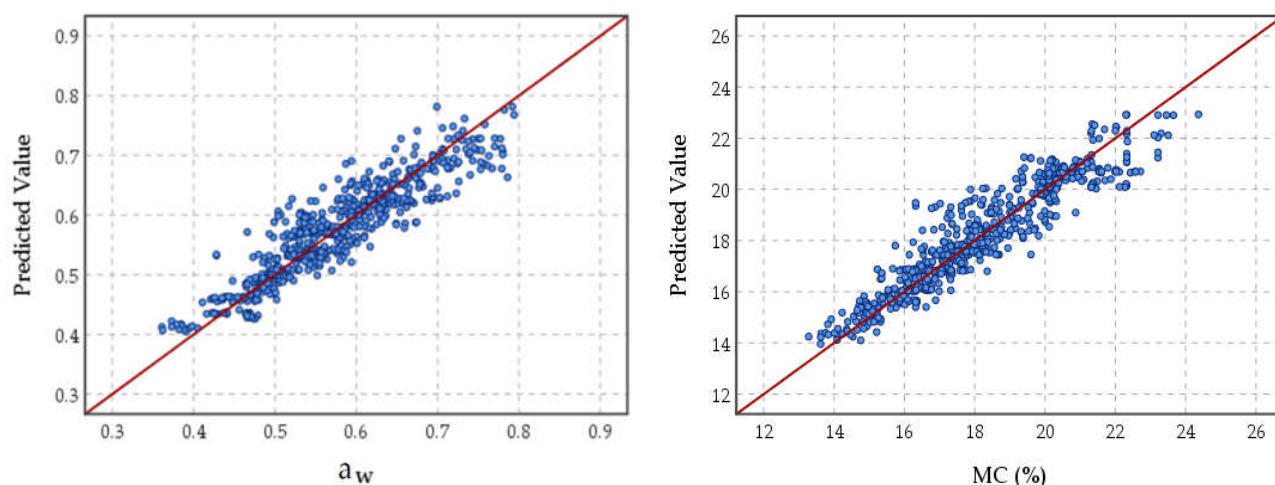

**Figure 7.** Scatter plots of measured values of pH, total soluble solids (TSS), water activity ( $a_w$ ), and moisture content (MC) versus the predicted values by the neural networks model in the evaluation phase based on the measured electrical properties of the stored date fruits at 10,000 Hz.

So far, to our knowledge, there is no study that has employed the feed-forward ANNs with a backpropagation training algorithm for the prediction of the physicochemical properties of date fruits based on their electrical properties. Nayak et al. [48] mentioned that the dates are the type of fruit that have been used very rarely to process with ANNs. However, Fadel suggested a novel method for classifying dates using Probabilistic Neural Networks (PNN) based on the color of five cultivars of date fruits. The authors observed good classification accuracy in the experimental process [94]. Hsu et al. [95] mentioned that the ANNs learned to find the solutions for the problem by developing a memory capable of associating many input patterns with a resulting set of effects or outputs. The problem with these ANNs models is the dependency on data for their training. The training phase of the models is the process of updating the internal representation of the model in response to external variables to achieve a specific task. In addition, it modifies the network architecture, which involves modifying the weights of the links, changing connection links by removing or creating new links, and changing the individual neurons firing rules [96]. Sablani and Rahman proposed [49] an ANNs model to predict the thermal conductivity of food, i.e., apple, corn starch, pear, raisin, potato, starch, ovalbumin, sucrose, carrot, and rice, as a function of moisture content, apparent porosity, and temperature. The optimal proposed ANNs model consisted of two hidden layers with four neurons in each layer. This model predicted the thermal conductivity with low mean absolute and relative errors. Singh [97] has proposed a methodology for the sweet potatoes during drying using an ANNs model to get online predictions of moisture kinetics in the potatoes. The results achieved in their work showed that the predicting ANNs model with two hidden neurons and a feed-forward network could help envisage and model the moisture relocate in the product.

Our results indicated that the MLR models were less accurate than the ANNs models for the prediction of fruit pH and had low performance and weak predictive ability for the TSS,  $a_w$ , and MC at all testing frequencies. If the constants or parameters of a mathematical equation that relates the input variables to the output variable are defined for a given mathematical equation that relates the input variables to the output variable, the difference between the predicted output and the observed output of the equation for the set of input data is a minimum for statistical regression, such as the MLR. As a result, ANNs can be used to study ambiguous and unclear datasets and their interactions, but statistical regression analysis, i.e., MLR, will fail in such cases. Furthermore, ANNs can be

used to analyze more data at the same time with more complicated and complex interactions. Even if the data is incomplete and noisy, ANNs can outperform MLR in prediction, modeling, and optimization [52]. Therefore, MLR models were unsuitable for our research, whereas the ANNs prediction model accurately predicted the quality attributes we were looking for. The results of ANNs are simple and do not require any modifications. ANNs are several types of intelligent modeling techniques that can solve a problem by analyzing scarce, unstructured, and incomplete numerical data about non-stationary and nonlinear systems [98]. The ANNs developed a solution by training on their measurements using the nonlinear correlation between various variables.

This study indicated that the ANNs model was found to be a powerful tool for efficiently predicting the pH, TSS, water activity, and moisture content of date fruits based on their electrical properties.

#### 4. Conclusions

This study indicated that the ANNs model is a powerful tool to efficiently predict the date fruits' quality based on their electrical properties during cold storage. The model established a new solution based on measured data using the nonlinear correlation between numerous variables. The optimal developed ANNs model had a 14-neuron input layer (electrical properties), a 15-neuron hidden layer, and a 4-neuron output layer. This model enhanced the fast and easy prediction of the pH, TSS,  $a_w$ , and MC of stored date fruits during cold storage with high  $R^2$  and low RMSE. The MLR models, on the other hand, were less accurate than ANNs models in predicting fruit pH and had poor performance and prediction abilities for the TSS, water activity, and moisture content across all testing frequencies. Based on these results, the MLR models are unsuitable for predicting the targeted attributes. Further research is needed to predict more chemical and mechanical properties of stored fruits based on their electrical properties, such as reducing and non-reducing sugars and texture parameters (hardness, adhesiveness, springiness, cohesiveness, gumminess, chewiness, and resilience). In addition, the quality of the stored fruits can be remotely monitored in real time using the Internet of Things (IoT) and ANNs prediction models.

**Author Contributions:** Conceptualization, M.M. (Maged Mohammed), M.M. (Muhammad Munir); methodology, M.M. (Maged Mohammed), M.M. (Muhammad Munir), A.A.; software, M.M. (Maged Mohammed); validation, M.M. (Maged Mohammed); formal analysis, M.M. (Maged Mohammed); investigation, M.M. (Maged Mohammed), M.M. (Muhammad Munir); data curation, M.M. (Maged Mohammed), M.M. (Muhammad Munir), and A.A.; writing—original draft preparation, M.M. (Maged Mohammed), M.M. (Muhammad Munir), and A.A.; writing—review and editing, M.M. (Maged Mohammed), M.M. (Muhammad Munir); visualization, M.M. (Maged Mohammed); project administration, M.M. (Maged Mohammed), M.M. (Muhammad Munir), and A.A.; funding acquisition, M.M. (Maged Mohammed). All authors have read and agreed to the published version of the manuscript.

**Funding:** The Ministry of Environment, Water, and Agriculture, Saudi Arabia, funded the research study by sponsoring the applied research project in the field of palm and dates (No. 2200011540).

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Data is contained within the article.

**Acknowledgments:** The authors would like to extend their gratitude to the Saudi Arabia Ministry of Environment, Water, and Agriculture for providing financial, technical, and administrative support to fund this work through the initiative of encouraging the agricultural “Applied research project in the field of palm and dates No. 2200011540”. The authors also extend their thanks and appreciation to the Date Palm Research Center of Excellence, King Faisal University, Saudi Arabia, and Date Palm Research Center, Al-Ahsa, Ministry of Environment, Water and Agriculture, Saudi Arabia, for facilitating the research completion through the availability of the engineering workshops, laboratories, and date fruit samples.

**Conflicts of Interest:** The authors declare no conflict of interest.

### Nomenclature

ANNs	Artificial Neural Networks
$a_w$	water activity
B	constant
C	capacitance, nF
$C_p$	capacitance value at parallel equivalent circuit model, nF
$C_s$	capacitance value at series equivalent circuit model, nF
D	dissipation factor
DCR	direct current resistance, k $\Omega$
$E_j$	error
L	inductance, H
$L_p$	inductance value at parallel equivalent circuit model, H
$L_s$	inductance value at series equivalent circuit model, H
MC	moisture content, %
$M_j$	measured value
ML	Machine Learning
MLR	Multiple Linear Regression
n	number of measurements
$O_j$	neuron output
pH	power of hydrogen
Q	quality factor
R	resistance, k $\Omega$
$R^2$	coefficient of determination
RMSE	root-mean-square error
$R_p$	equivalent parallel resistance, k $\Omega$
$R_s$	equivalent series resistance, k $\Omega$
$t_j$	target value
TanH	hyperbolic tangent
$T_i$	measured value
TSS	total soluble solids, Brix
$W_j$	input weight
X	reactance, k $\Omega$
$X_i$	independent variable
$X_{oj}$	the outcome of the sum value
$y_i$	dependent variable
Z	the absolute value of the impedance, k $\Omega$
$\theta$	phase angle in radian, rad
$\theta^\circ$	phase angle, degree

### References

1. Chao, C.C.T.; Krueger, R.R. The date palm (*Phoenix dactylifera* L.): Overview of biology, uses, and cultivation. *HortScience* **2007**, *42*, 1077–1082. <https://doi.org/10.21273/hortsci.42.5.1077>.
2. Dhehibi, B.; Ben Salah, M.; Frija, A. Date Palm Value Chain Analysis and Marketing Opportunities for the Gulf Cooperation Council (GCC) Countries. In *Agricultural Economics—Current Issues*; Kulshreshtha, S., Ed.; IntechOpen: London, UK, 2018; pp. 11–17.
3. Zaid, A.; De Wet, P.F. Date Palm Cultivation. In *FAO Plant Production and Protection Paper 156 Rev.1*; FAO: Rome, Italy, 2002; pp. 1–28.
4. Farahnaky, A.; Afshari-Jouybari, H. Physicochemical changes in Mazafati date fruits incubated in hot acetic acid for accelerated ripening to prevent diseases and decay. *Sci. Hortic.* **2011**, *127*, 313–317. <https://doi.org/10.1016/j.scienta.2010.10.019>.
5. Mohammed, M.; Alqahtani, N.; El-Shafie, H. Development and Evaluation of an Ultrasonic Humidifier to Control Humidity in a Cold Storage Room for Postharvest Quality Management of Dates. *Foods* **2021**, *10*, 949. <https://doi.org/10.3390/foods10050949>.
6. Siddiq, M.; Greiby, I. Overview of Date Fruit Production, Postharvest handling, Processing, and Nutrition. In *Dates: Postharvest Science, Processing Technology and Health Benefits*; John Wiley & Sons Ltd: Chichester, UK, 2013; pp. 1–28, ISBN 9781118292419.
7. Al-Yahyai, R.; Al-Kharusi, L. Physical and chemical quality attributes of freeze-stored dates. *Int. J. Agric. Biol.* **2012**, *14*, 97–100.

8. Aleid, S.M.; Elansari, A.M.; Zhen-Xing, T.; Sallam, A.A. Effect of cold storage and packing type on Khalas and Sukkary dates quality. *Adv. J. Food Sci. Technol.* **2014**, *6*, 603–608. <https://doi.org/10.19026/ajfst.6.82>.
9. Gallagher, M.J.S.; Mahajan, P.V. The stability and shelf life of fruit and vegetables. In *Food and Beverage Stability and Shelf Life*; Kilcast, D., Subramaniam, P., Eds.; Woodhead Publishing: Cambridge, UK, 2011; pp. 641–656. ISBN 9781845697013.
10. Thompson, A.K. *Fruit and Vegetable Storage*; SpringerBriefs in Food, Health, and Nutrition; Springer International Publishing: Cham, Switzerland, 2016; ISBN 978-3-319-23590-5.
11. Suriati, L.; Utama, I.M.S.; Harjosuwono, B.A.; Wayan Gunam, I.B. Physicochemical characteristics of fresh-cut tropical fruit during storage. *Int. J. Adv. Sci. Eng. Inf. Technol.* **2020**, *10*, 1731–1736. <https://doi.org/10.18517/ijaseit.10.4.10857>.
12. Paull, R. Effect of temperature and relative humidity on fresh commodity quality. *Postharvest Biol. Technol.* **1999**, *15*, 263–277. [https://doi.org/10.1016/S0925-5214\(98\)00090-8](https://doi.org/10.1016/S0925-5214(98)00090-8).
13. Zainalabidin, F.A.; Sagrin, M.S.; Wan Azmi, W.N.; Ghazali, A.S. Optimum postharvest handling-effect of temperature on quality and shelf life of tropical fruits and vegetables. *J. Trop. Resour. Sustain. Sci.* **2019**, *7*, 23–30. <https://doi.org/10.47253/jtrss.v7i1.505>.
14. Mohammed, M.; Sallam, A.; Alqahtani, N.; Munir, M. The Combined Effects of Precision-Controlled Temperature and Relative Humidity on Artificial Ripening and Quality of Date Fruit. *Foods* **2021**, *10*, 2636. <https://doi.org/10.3390/foods10112636>.
15. Kader, A.A.; Yahia, E.M. Postharvest biology of tropical and subtropical fruits. In *Postharvest Biology and Technology of Tropical and Subtropical Fruits*; Yahia, M.E., Ed.; Woodhead Publishing: Cambridge, UK, 2011; Volume 1, pp. 79–111. ISBN 9781845697334.
16. Adel, A.K.; Awad, M.H. Harvesting and Postharvest Handling of Dates. *Icarda* **2009**, *15*, 1–15.
17. Sarraf, M.; Jemni, M.; Kahramanoğlu, I.; Artés, F.; Shahkoomahally, S.; Namsi, A.; Ihtisham, M.; Brestic, M.; Mohammadi, M.; Rastogi, A. Commercial techniques for preserving date palm (*Phoenix dactylifera*) fruit quality and safety: A review. *Saudi J. Biol. Sci.* **2021**, *28*, 4408–4420. <https://doi.org/10.1016/j.sjbs.2021.04.035>.
18. Omamor, I.B.; Hamza, A. The effects of relative humidity and temperature on disease development in stored date fruits. *Acta Hort.* **2007**, *736*, 457–460. <https://doi.org/10.17660/ActaHortic.2007.736.43>.
19. Akhavan, H.R.; Hosseini, F.S.; Amiri, S.; Radi, M. Cinnamaldehyde-Loaded Nanostructured Lipid Carriers Extend the Shelf Life of Date Palm Fruit. *Food Bioprocess Technol.* **2021**, *14*, 1478–1489. <https://doi.org/10.1007/s11947-021-02645-8>.
20. Akdemir, S.; Bal, E. Effect of the Ambient Factors in Boxes and Cold Store on Quality of Stored Peach. *Erwerbs-Obstbau* **2022**, *64*, 47–53. <https://doi.org/10.1007/s10341-021-00612-3>.
21. Zhu, J.; Zhu, D.; Wang, L.; Xue, K.; Liao, J.; Zhang, S. Effects of compression damage on mechanical behavior and quality attributes of apple fruit. *Food Sci. Technol. Res.* **2022**, *28*, 53–65. <https://doi.org/10.3136/fstr.fstr-d-21-00178>.
22. Mohammed, M.E.A.; El-Shafie, H.A.F.; Alhajhoj, M.R. Design and efficacy evaluation of a modern automated controlled atmosphere system for pest management in stored dates. *J. Stored Prod. Res.* **2020**, *89*, 101719. <https://doi.org/10.1016/j.jspr.2020.101719>.
23. Mohammed, M.E.A.; El-Shafie, H.A.; Sallam, A.A.A. A solar-powered heat system for management of almond moth, *Cadra cautella* (Lepidoptera: Pyralidae) in stored dates. *Postharvest Biol. Technol.* **2019**, *154*, 121–128. <https://doi.org/10.1016/j.postharvbio.2019.04.025>.
24. Pátkai, G. Fruit and Fruit Products as Ingredients. In *Handbook of Fruits and Fruit Processing*; Wiley-Blackwell: Oxford, UK, 2012; pp. 263–275. ISBN 9780813808949.
25. Chen, P.; Sun, Z. A review of non-destructive methods for quality evaluation and sorting of agricultural products. *J. Agric. Eng. Res.* **1991**, *49*, 85–98. [https://doi.org/10.1016/0021-8634\(91\)80030-I](https://doi.org/10.1016/0021-8634(91)80030-I).
26. Chen, L.; Opara, U.L. Texture measurement approaches in fresh and processed foods—A review. *Food Res. Int.* **2013**, *51*, 823–835. <https://doi.org/10.1016/j.foodres.2013.01.046>.
27. Abbott, J.A. Quality measurement of fruits and vegetables. *Postharvest Biol. Technol.* **1999**, *15*, 207–225. [https://doi.org/10.1016/S0925-5214\(98\)00086-6](https://doi.org/10.1016/S0925-5214(98)00086-6).
28. Barreiro, P.; Ruiz-Altisent, M.; Valero, C.; García-Ramos, J. Fruit Postharvest Technology: Instrumental Measurement of Ripeness and Quality. In *Production Practices and Quality Assessment of Food Crops*; Dris, R., Jain, S., Eds.; Springer: Dordrecht, The Netherlands, 2006; pp. 321–340.
29. Mohammed, M.E.A.; Alhajhoj, M.R. Importance and Applications of Ultrasonic Technology to Improve Food Quality. In *Food Processing*; Marc, R.A., Díaz, A.V., Izquierdo, G.D.P., Eds.; IntechOpen: Rijeka, Croatia, 2020.
30. Adebayo, S.E.; Hashim, N.; Hass, R.; Reich, O.; Regen, C.; Münzberg, M.; Abdan, K.; Hanafi, M.; Zude-Sasse, M. Using absorption and reduced scattering coefficients for non-destructive analyses of fruit flesh firmness and soluble solids content in pear. *Postharvest Biol. Technol.* **2017**, *130*, 56–63. <https://doi.org/10.1016/j.postharvbio.2017.04.004>.
31. Hosoya, N.; Mishima, M.; Kajiwar, I.; Maeda, S. Non-destructive firmness assessment of apples using a non-contact laser excitation system based on a laser-induced plasma shock wave. *Postharvest Biol. Technol.* **2017**, *128*, 11–17. <https://doi.org/10.1016/j.postharvbio.2017.01.014>.
32. Mohamed, M.E.A.; Amer Eiss, A.H. Pulsed Electric Fields for Food Processing Technology. In *Structure and Function of Food Engineering*; Amer Eiss, A.H., Ed.; InTech: London, UK, 2012; Volume 11, pp. 275–306.
33. Kertész, Á.; Hlaváčová, Z.; Vozáry, E.; Staroňová, L. Relationship between moisture content and electrical impedance of carrot slices during drying. *Int. Agrophys.* **2015**, *29*, 61–66. <https://doi.org/10.1515/intag-2015-0013>.
34. Lew, R.R. Pressure regulation of the electrical properties of growing *Arabidopsis thaliana* L. Root hairs. *Plant Physiol.* **1996**, *112*, 1089–1100. <https://doi.org/10.1104/pp.112.3.1089>.

35. Martín-Esparza, M.E.; Martínez-Navarrete, N.; Chiralt, A.; Fito, P. Dielectric behavior of apple (var. Granny Smith) at different moisture contents. Effect of vacuum impregnation. *J. Food Eng.* **2005**, *77*, 51–56. <https://doi.org/10.1016/j.jfoodeng.2005.06.018>.
36. Hlaváčková, Z. Electrical properties of agricultural Products, Encyclopedia of Agrophysics. In *Encyclopedia of Agrophysics*; Gliński, J., Horabik, J., Lipiec, J., Eds.; Encyclopedia of Earth Sciences Series; Springer Netherlands: Dordrecht, The Netherlands, 2011; pp. 238–241. ISBN 978-90-481-3584-4.
37. Hlaváčková, Z.; Kertész, Á.; Priatková, L. Electrical capacity and resistance measurement of blueberry cultivars (*Vaccinium corymbosum* L.). *Acta Technol. Agric.* **2011**, *14*, 32–35.
38. Ahmed, D.; Yousef, A.; Hassan, H. Relationship between electrical conductivity, softening and color of Fuerte avocado fruits during ripening. *Agric. Biol. J. N. Am.* **2010**, *1*, 878–885. <https://doi.org/10.5251/abjna.2010.1.5.878.885>.
39. Watanabe, T.; Ando, Y.; Orikasa, T.; Kasai, S.; Shiina, T. Electrical impedance estimation for apple fruit tissues during storage using Cole–Cole plots. *J. Food Eng.* **2018**, *221*, 29–34. <https://doi.org/10.1016/j.jfoodeng.2017.09.028>.
40. Zhang, M.I.N.; Willison, J.H.M. Electrical impedance analysis in plant tissues: The effect of freeze-thaw injury on the electrical properties of potato tuber and carrot root tissues. *Can. J. Plant Sci.* **1992**, *72*, 545–553. <https://doi.org/10.4141/cjps92-068>.
41. Watanabe, T.; Ando, Y.; Orikasa, T.; Shiina, T.; Kohyama, K. Effect of short time heating on the mechanical fracture and electrical impedance properties of spinach (*Spinacia oleracea* L.). *J. Food Eng.* **2017**, *194*, 9–14. <https://doi.org/10.1016/j.jfoodeng.2016.09.001>.
42. Crowe, J.H.; Crowe, L.M. Induction of anhydrobiosis: Membrane changes during drying. *Cryobiology* **1982**, *19*, 317–328. [https://doi.org/10.1016/0011-2240\(82\)90160-2](https://doi.org/10.1016/0011-2240(82)90160-2).
43. Ando, Y.; Mizutani, K.; Wakatsuki, N. Electrical impedance analysis of potato tissues during drying. *J. Food Eng.* **2014**, *121*, 24–31. <https://doi.org/10.1016/j.jfoodeng.2013.08.008>.
44. Imaizumi, T.; Tanaka, F.; Hamanaka, D.; Sato, Y.; Uchino, T. Effects of hot water treatment on electrical properties, cell membrane structure and texture of potato tubers. *J. Food Eng.* **2015**, *162*, 56–62. <https://doi.org/10.1016/j.jfoodeng.2015.04.003>.
45. Zhelyazkov, S.; Zsivanovits, G.; Brashlyanova, B.; Marudova-Zsivanovits, M. Shelf-life extension of fresh-cut apple cubes with chitosan coating. *Bulg. J. Agric. Sci.* **2014**, *20*, 536–540.
46. Pethig, R.; Kell, D.B. The passive electrical properties of biological systems: Their significance in physiology, biophysics and biotechnology. *Phys. Med. Biol.* **1987**, *32*, 933–970. <https://doi.org/10.1088/0031-9155/32/8/001>.
47. Mohammadi, K. Groundwater Table Estimation Using MODFLOW and Artificial Neural Networks. In *Practical Hydroinformatics*; Robert, J., Abrahart Linda, M., See, D.P.S., Eds.; Springer Verlag: Berlin/Heidelberg, Germany, 2008; pp. 127–138.
48. Nayak, J.; Vakula, K.; Dinesh, P.; Naik, B.; Pelusi, D. Intelligent food processing: Journey from artificial neural network to deep learning. *Comput. Sci. Rev.* **2020**, *38*, 100297. <https://doi.org/10.1016/j.cosrev.2020.100297>.
49. Sablani, S.S.; Rahman, M.S. Using neural networks to predict thermal conductivity of food as a function of moisture content, temperature and apparent porosity. *Food Res. Int.* **2003**, *36*, 617–623. [https://doi.org/10.1016/S0963-9969\(03\)00012-7](https://doi.org/10.1016/S0963-9969(03)00012-7).
50. Basheer, I.A.; Hajmeer, M. Artificial neural networks: Fundamentals, computing, design, and application. *J. Microbiol. Methods* **2000**, *43*, 3–31. [https://doi.org/10.1016/S0167-7012\(00\)00201-3](https://doi.org/10.1016/S0167-7012(00)00201-3).
51. Huang, Y.; Kangas, L.J.; Rasco, B.A. Applications of Artificial Neural Networks (ANNs) in food science. *Crit. Rev. Food Sci. Nutr.* **2007**, *47*, 113–126. <https://doi.org/10.1080/10408390600626453>.
52. Bhotmange, M.; Shastri, P. Application of Artificial Neural Networks to Food and Fermentation Technology. In *Artificial Neural Networks—Industrial and Control Engineering Applications*; Suzuki, K., Ed.; IntechOpen: London, UK, 2012; pp. 201–222.
53. AOAC Association of Official Analytical Chemists. *Official Methods of Analysis of AOAC International*, 16th ed.; AOAC International: Arlington, VA, USA, 1995.
54. Shar, G.Q.; Memon, A.H.; Makhija, P.M.J.; Sahito, B.; Jatoi, W.B. Physico-Chemical Characteristics of Pollinated and Non Pollinated Date Fruit of District Khairpur, Sindh, Pakistan. *Pak. J. Anal. Environ. Chem.* **2012**, *13*, 107–117.
55. Saeed, I.K.; El-Rauof, F.A.; Dawoud, H.D. Physico-chemical Evaluation of Some Introduced Date Fruits Cultivars grown under Sudanese conditions. *Int. J. Appl. Sci. Biotechnol.* **2015**, *3*, 731–736. <https://doi.org/10.3126/ijasbt.v3i4.13996>.
56. Mohammed, M.E.A.; Alhajhoj, M.R.; Ali-Dinar, H.M.; Munir, M. Impact of a novel water-saving subsurface irrigation system on water productivity, photosynthetic characteristics, yield, and fruit quality of date palm under arid conditions. *Agronomy* **2020**, *10*, 1265. <https://doi.org/10.3390/agronomy10091265>.
57. Amira, E.A.; Guido, F.; Behija, S.E.; Manel, I.; Nesrine, Z.; Ali, F.; Mohamed, H.; Nouredine, H.A.; Lotfi, A. Chemical and aroma volatile compositions of date palm (*Phoenix dactylifera* L.) fruits at three maturation stages. *Food Chem.* **2011**, *127*, 1744–1754. <https://doi.org/10.1016/j.foodchem.2011.02.051>.
58. Rastegar, S.; Rahemi, M.; Baghizadeh, A.; Gholami, M. Enzyme activity and biochemical changes of three date palm cultivars with different softening pattern during ripening. *Food Chem.* **2012**, *134*, 1279–1286. <https://doi.org/10.1016/j.foodchem.2012.02.208>.
59. Ramalingam, S.; Bahuguna, A.; Lim, S.; Joe, A.-R.; Lee, J.-S.; Kim, S.-Y.; Kim, M. Physicochemical, Microbial, and Volatile Compound Characteristics of Gochujang, Fermented Red Pepper Paste, Produced by Traditional Cottage Industries. *Foods* **2022**, *11*, 375. <https://doi.org/10.3390/foods11030375>.
60. El-Gioushy, S.F.; El-Masry, A.M.; Fikry, M.; El-Kholy, M.F.; Shaban, A.E.; Sami, R.; Algarni, E.; Alshehry, G.; Aljumayi, H.; Benajiba, N.; et al. Utilization of Active Edible Films (Chitosan, Chitosan Nanoparticle, and CaCl<sub>2</sub>) for Enhancing the Quality

- Properties and the Shelf Life of Date Palm Fruits (Barhi Cultivar) during Cold Storage. *Coatings* **2022**, *12*, 255. <https://doi.org/10.3390/coatings12020255>.
61. Alnaim, M.A.; Mohamed, M.S.; Mohammed, M.; Munir, M. Effects of Automated Irrigation Systems and Water Regimes on Soil Properties, Water Productivity, Yield and Fruit Quality of Date Palm. *Agriculture* **2022**, *12*, 343. <https://doi.org/10.3390/agriculture12030343>.
  62. Mohammed, M.; Sallam, A.; Munir, M.; Ali-Dinar, H. Effects of deficit irrigation scheduling on water use, gas exchange, yield, and fruit quality of date palm. *Agronomy* **2021**, *11*, 2256. <https://doi.org/10.3390/agronomy11112256>.
  63. Barrevel, W.A. *Date Palm Products*, FAO Agricultural Services Bulletin; Food and Agriculture Organization of the United Nations: Rome, Italy, 1993; Volume 101.
  64. Babiker, M.E.; Aziz, A.R.A.; Heikal, M.; Yusup, S. Pyrolysis Characteristics of Phoenix Dactylifera Date Palm Seeds Using Thermo-Gravimetric Analysis (TGA). *Int. J. Environ. Sci. Dev.* **2013**, *4*, 521–524. <https://doi.org/10.7763/IJESD.2013.V4.406>.
  65. Hasanaoui, A.; Elhoumaizi, M.A.; Hakkou, A.; Wathélet, B.; Sindic, M. Physico-chemical Characterization, Classification and Quality Evaluation of Date Palm Fruits of some Moroccan Cultivars. *J. Sci. Res.* **2011**, *3*, 139–149. <https://doi.org/10.3329/jsr.v3i1.6062>.
  66. Ahmed, I.A.; Ahmed, A.W.K.; Robinson, R.K. Chemical composition of date varieties as influenced by the stage of ripening. *Food Chem.* **1995**, *54*, 305–309. [https://doi.org/10.1016/0308-8146\(95\)00051-J](https://doi.org/10.1016/0308-8146(95)00051-J).
  67. Al-Hooti, S.; Sidhu, J.S.; Al-Otaibi, J.; Al-Ameeri, H.; Qabazard, H. Processing of some important date cultivars grown in united arab emirates into chutney and date relish. *J. Food Process. Preserv.* **1997**, *21*, 55–68. <https://doi.org/10.1111/j.1745-4549.1997.tb00767.x>.
  68. Elleuch, M.; Besbes, S.; Roiseux, O.; Blecker, C.; Deroanne, C.; Drira, N.E.; Attia, H. Date flesh: Chemical composition and characteristics of the dietary fibre. *Food Chem.* **2008**, *111*, 676–682. <https://doi.org/10.1016/j.foodchem.2008.04.036>.
  69. Judet, D.; Bensoussan, M.; Perrier-Cornet, J.M.; Dantigny, P. Distributions of the growth rate of the germ tubes and germination time of *Penicillium chrysogenum* conidia depend on water activity. *Food Microbiol.* **2008**, *25*, 902–907. <https://doi.org/10.1016/j.fm.2008.05.007>.
  70. Nadeem, M.; Salim-ur-Rehman; Anjum, F.M.; Bhatti, I.A. Textural Profile Analysis and Phenolic Content of Some Date Palm Varieties. *J. Agric. Res.* **2011**, *49*, 525–539.
  71. Rashid, M.T.; Safdar, B.; Jatoti, M.A.; Solangi, N.; Wali, A.; Ali, N.; Liu, K. Structure, rheology, and tribology of date fruit paste procured from different date palm cultivars. *J. Food Process Eng.* **2021**, *44*, 13891. <https://doi.org/10.1111/jfpe.13891>.
  72. Hazbavi, I.; Khoshtaghaza, M.H.; Mostaan, A.; Banakar, A. Effect of postharvest hot-water and heat treatment on quality of date palm (cv. Stamaran). *J. Saudi Soc. Agric. Sci.* **2015**, *14*, 153–159. <https://doi.org/10.1016/j.jssas.2013.10.003>.
  73. Jemni, M.; Chniti, S.; Ferchichi, A.; Artés, F.; Jemni, M.; Chniti, S.; Harbaoui, K.; Ferchichi, A.; Artés, F. Partial vacuum and active modified atmosphere packaging for keeping overall quality of dates. *J. New Sci. Agric. Biotechnol.* **2016**, *29*, 1656–1665.
  74. Radi, M.; Firouzi, E.; Akhavan, H.; Amiri, S. Effect of Gelatin-Based Edible Coatings Incorporated with Aloe vera and Black and Green Tea Extracts on the Shelf Life of Fresh-Cut Oranges. *J. Food Qual.* **2017**, *2017*, 1–10. <https://doi.org/10.1155/2017/9764650>.
  75. Noutfia, Y.; Alem, C.; Filali Zegzouti, Y. Assessment of physico-chemical and sensory properties of two date (Phoenix dactylifera L.) cultivars under commercial cold storage conditions. *J. Food Process. Preserv.* **2019**, *43*, 14228. <https://doi.org/10.1111/jfpp.14228>.
  76. Zhang, M.I.N.; Willison, J.H.M. Electrical impedance analysis in plant tissues: In vivo detection of freezing injury. *Can. J. Bot.* **1992**, *70*, 2254–2258. <https://doi.org/10.1139/b92-279>.
  77. Firouz, M.S.; Omid, M.; Alimardani, R. Prediction of banana quality during ripening stage using capacitance sensing system. *Aust. J. Crop Sci.* **2010**, *4*, 443–447.
  78. Mison, N.; Harun, N.H.; Lee, Y.K.; Sidek, R.M.; Aris, I.; Wakiwaka, H.; Tashiro, K. Improvement in sensitivity of an inductive oil palm fruit sensor. *Sensors* **2014**, *14*, 2431–2448. <https://doi.org/10.3390/s140202431>.
  79. Zhang, M.I.N.; Willison, J.H.M.; Cox, M.A.; Hall, S.A. Measurement of heat injury in plant tissue by using electrical impedance analysis. *Can. J. Bot.* **1993**, *71*, 1605–1611. <https://doi.org/10.1139/b93-195>.
  80. Montoya, M.; López-Rodríguez, V.; De La Plaza, J.L. Electrical Conductivity in Avocado as Maturity Index. In *Developments in Food Engineering*; Springer US: Boston, MA, USA, 1994; pp. 945–947.
  81. Icier, F.; Ilcali, C. Electrical Conductivity of Apple and Sourcherry Juice Concentrates During Ohmic Heating. *J. Food Process Eng.* **2004**, *27*, 159–180. <https://doi.org/10.1111/j.1745-4530.2004.tb00628.x>.
  82. Ramaswamy, H.S.; Marcotte, M.; Sastry, S.; Abdelrahim, K. *Ohmic Heating in Food Processing*; Ramaswamy, H.S., Marcotte, M., Sastry, S., Abdelrahim, K., Eds.; CRC Press, Taylor & Francis Group Ltd.: London, UK, 2014; ISBN 9780429149962.
  83. Rao, M.A.; Rizvi, S.S.; Datta, A.K.; Ahmed, J. *Engineering Properties of Foods*; Rao, M.A., Rizvi, S.S.H., Datta, A.K., Ahmed, J., Eds.; CRC Press: London, UK, 2014; ISBN 9780429097201.
  84. Athmaselvi, K.A.; Viswanathan, R.; Balasubramanian, M.; Roy, I. The Effects of Concentration and Type of Electrode on Electrical Conductivity of Guava Pulp during Ohmic Heating. *J. Food Res. Technol.* **2014**, *2*, 113–123.
  85. Ando, Y.; Maeda, Y.; Mizutani, K.; Wakatsuki, N.; Hagiwara, S.; Nabetani, H. Effect of air-dehydration pretreatment before freezing on the electrical impedance characteristics and texture of carrots. *J. Food Eng.* **2016**, *169*, 114–121. <https://doi.org/10.1016/j.jfoodeng.2015.08.026>.
  86. Yovcheva, T.; Vozáry, E.; Bodurov, I.; Viraneva, A.; Marudova, M.; Exner, G. Investigation of apples' aging by electric impedance spectroscopy. *Bulg. Chem. Commun.* **2013**, *45*, 68–72.

87. Jiangjie, S.; Sen, H.; Yuanmin, Z. Study on the electricity characteristic research of postharvest starkrimson. *J. North Gard.* **2011**, *6*, 9–11.
88. Sastry, S.K. Ohmic heating. In *Food Engineering*; Barbosa-Cánovas, G.V., Ed.; Eolss Publishers Co. Ltd. Oxford: Oxford, UK, 2009.
89. Juansah, J.; Budiastra, I.W.; Dahlan, K.; Seminar, K.B. Electrical properties of Garut citrus fruits at low alternating current signal and its correlation with physicochemical properties during maturation. *Int. J. Food Prop.* **2014**, *17*, 1498–1517. <https://doi.org/10.1080/10942912.2012.723233>.
90. Harker, F.R.; Maindonald, J.H. Ripening of Nectarine Fruit (Changes in the Cell Wall, Vacuole, and Membranes Detected Using Electrical Impedance Measurements). *Plant Physiol.* **1994**, *106*, 165–171. <https://doi.org/10.1104/pp.106.1.165>.
91. Traffano-Schiffo, M.V.; Castro-Giraldez, M.; Colom, R.J.; Fito, P.J. New Spectrophotometric System to Segregate Tissues in Mandarin Fruit. *Food Bioprocess Technol.* **2018**, *11*, 399–406. <https://doi.org/10.1007/s11947-017-2019-8>.
92. Bian, H.X.; Tu, P.; Hua-li, X.; Shi, P. Quality predictions for bruised apples based on dielectric properties. *J. Food Process. Preserv.* **2019**, *43*, e14006. <https://doi.org/10.1111/jfpp.14006>.
93. Pierzynowska-Korniak, G.; Zywnica, R.; Wójcik, J. Electric properties of apple purée and pulpy apple juices. *Eur. Food Res. Technol.* **2003**, *216*, 385–389. <https://doi.org/10.1007/s00217-002-0655-2>.
94. Fadel, M. Date Fruits Classification Using Probabilistic Neural Networks. *Agric. Eng. Int. CIGR J.* **2007**, *9*, 003.
95. Hsu, K.-I.; Gupta, H.V.; Sorooshian, S. Artificial Neural Network Modeling of the Rainfall-Runoff Process. *Water Resour. Res.* **1995**, *31*, 2517–2530. <https://doi.org/10.1029/95WR01955>.
96. Schalkoff, R.J. *Artificial Neural Networks*; McGraw-Hill Higher Education: New York, NY, USA, 1997; ISBN 007057118X.
97. Singh, N.J.; Pandey, R.K. Neural network approaches for prediction of drying kinetics during drying of sweet potato. *Agric. Eng. Int. CIGR J.* **2011**, *13*, 1–7.
98. Vassileva, S.; Tzvetkova, B.; Katranoushkova, C.; Losseva, L. Neuro-fuzzy prediction of uricase production. *Bioprocess Eng.* **2000**, *22*, 363–367. <https://doi.org/10.1007/s004490050744>.