Supplementary Materials

Design of sodium titanate nanowires as anodes for dual Li,Na ion batteries

Silva Stanchovska, Mariya Kalapsazova, Sonya Harizanova, Violeta Koleva, Radostina Stoyanova *

Institute of General and Inorganic Chemistry, Bulgarian Academy of Sciences, 1113 Sofia, Bulgaria

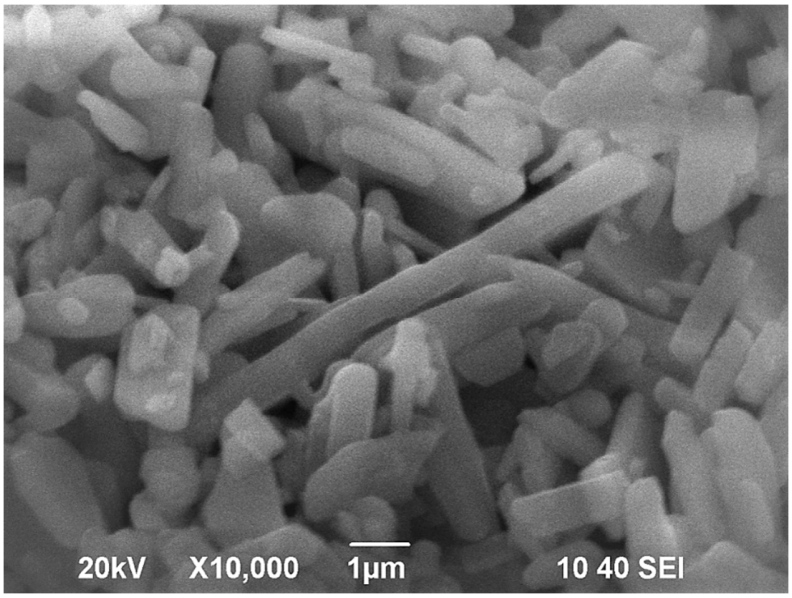


Figure S1. SEM image of $Na_2Ti_3O_7$ prepared by solid state reaction

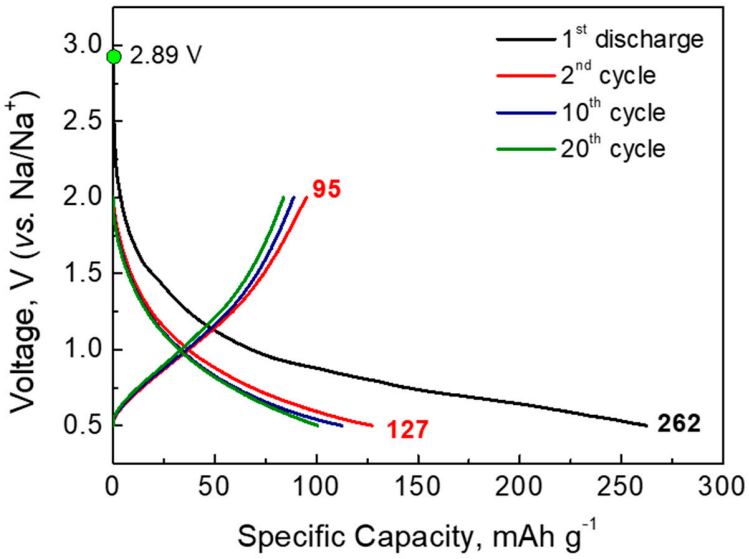


Figure S2. Charge/discharge curves after 1st discharge, 2nd, 10th and 20th cycles of NTO-2 in sodium-ion cell, cycled between 0.5 – 2.0 V at C/20 rate.

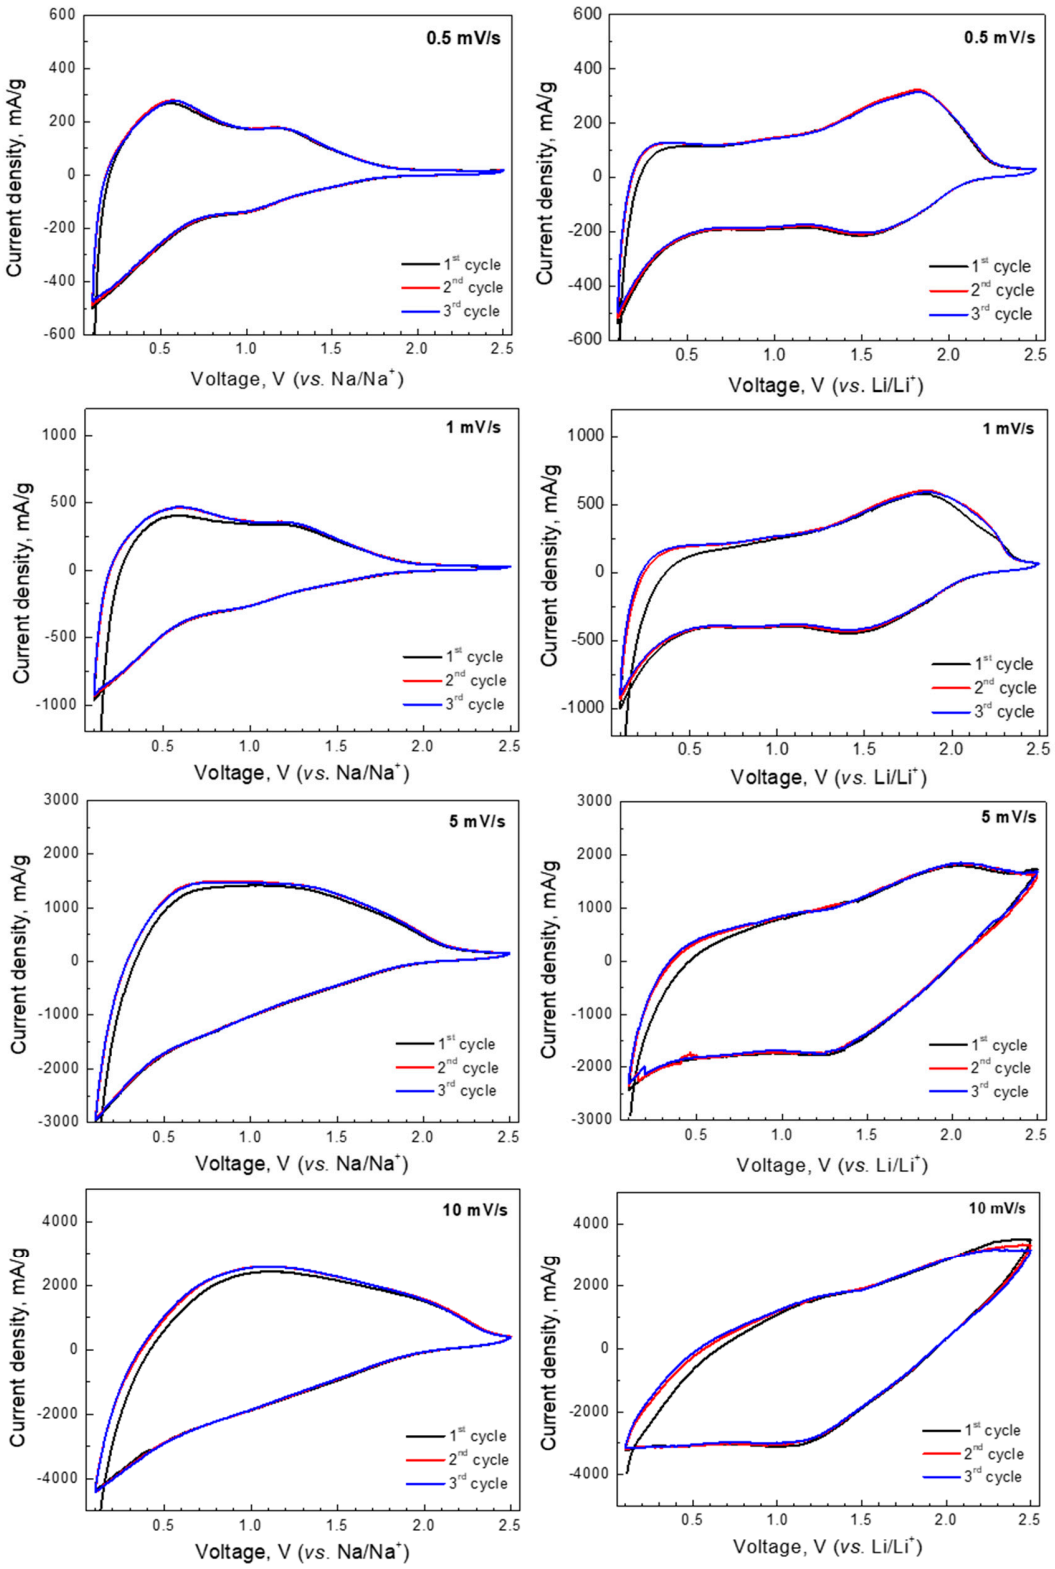


Figure S3. CV curves at 0.5, 1, 5 and 10 mV/s scan rate for NTO-2 in sodium (left) and lithium half-cells (right).