recycling

MDPI

Review

Transforming Municipal Solid Waste into Value: A Critical Review of Technologies from Bin to Circularity

Raman Rao [1], Aditya Sarker [1], Rakshit Kumar [1], Mariangeles Salas [1], Luis Pena [1], Naimul Haque [1], Summia Rahman [1], Vaishnavi Srinivasan [1], Raghul Thiyagarajan [1] and Lokendra Pal [1,2,3,*]

[1] Department of Forest Biomaterials, North Carolina State University, Raleigh, NC 27695, USA
[2] Department of Mechanical and Aerospace Engineering, North Carolina State University, Raleigh, NC 27606, USA
[3] Global One Health Academy (GOHA), North Carolina State University, Raleigh, NC 27695, USA
* Correspondence: lpal@ncsu.edu

Abstract

Municipal solid waste (MSW) management is a critical challenge to advancing recycling and circular economy approaches. This review provides a comprehensive overview of MSW management, encompassing sourcing, policy frameworks, characterization techniques, separation technologies, preprocessing strategies, and utilization pathways. First, generation patterns and sourcing mechanisms are discussed in both U.S. and global contexts, with emphasis on the influence of policy frameworks on waste reduction and diversion. Second, characterization techniques are evaluated, focusing on physical and chemical analysis for material recyclability. Third, sorting technologies are critically reviewed, covering conventional methods and emerging sensor-based approaches. Preprocessing techniques are then evaluated for their role in improving downstream conversion efficiency. Finally, valorization pathways such as waste-to-syngas, waste-to-biochar, and waste-to-sustainable aviation fuel (SAF) are assessed in terms of their role in climate mitigation and the circular economy. It is anticipated that this review will provide a foundational reference for researchers, policymakers, and industry stakeholders aiming to strengthen the recyclability infrastructure and maximize the efficiency of MSW management systems in the framework of the circular economy.

Keywords: municipal solid waste; waste characterization; sorting technologies; resource recovery; circular economy; sustainability

Check for updates

Academic Editor: Giovanni De Feo

Received: 19 May 2026
Revised: 14 June 2026
Accepted: 19 June 2026
Published: 22 June 2026

Copyright: © 2026 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license.

1. Introduction

Rapid industrialization, population growth, and high consumption rates are driving substantial municipal solid waste (MSW) generation, which is posing serious environmental consequences around the globe. The global generation of MSW in 2020 was 2.1 billion tonnes, which is projected to reach 3.4 billion by the year 2050, with an average per capita generation of approximately 0.74 kg [1]. This contributes around 2.38 billion tonnes of CO_2 equivalent emissions annually [2]. As a reference point, regional data (Figure 1) show that the East Asia and Pacific regions exhibit the highest MSW generation rates, expected to rise from 602 MT/year in 2025 to 714 MT/year by 2050 due to substantial population and economic growth. Conversely, regions like Sub-Saharan Africa, South Asia, and the Middle East and North Africa show alarming waste generation trends with projected increases of nearly threefold and twofold by 2050. North America and Europe, while generating a

lower amount of total waste, have significantly higher per capita waste production due to higher living standards and consumption. For instance, North American per capita waste generation was 2.21 kg/day in 2016, projected to increase to 2.37 kg/day by 2030 and 2.50 kg/day by 2050 [1].

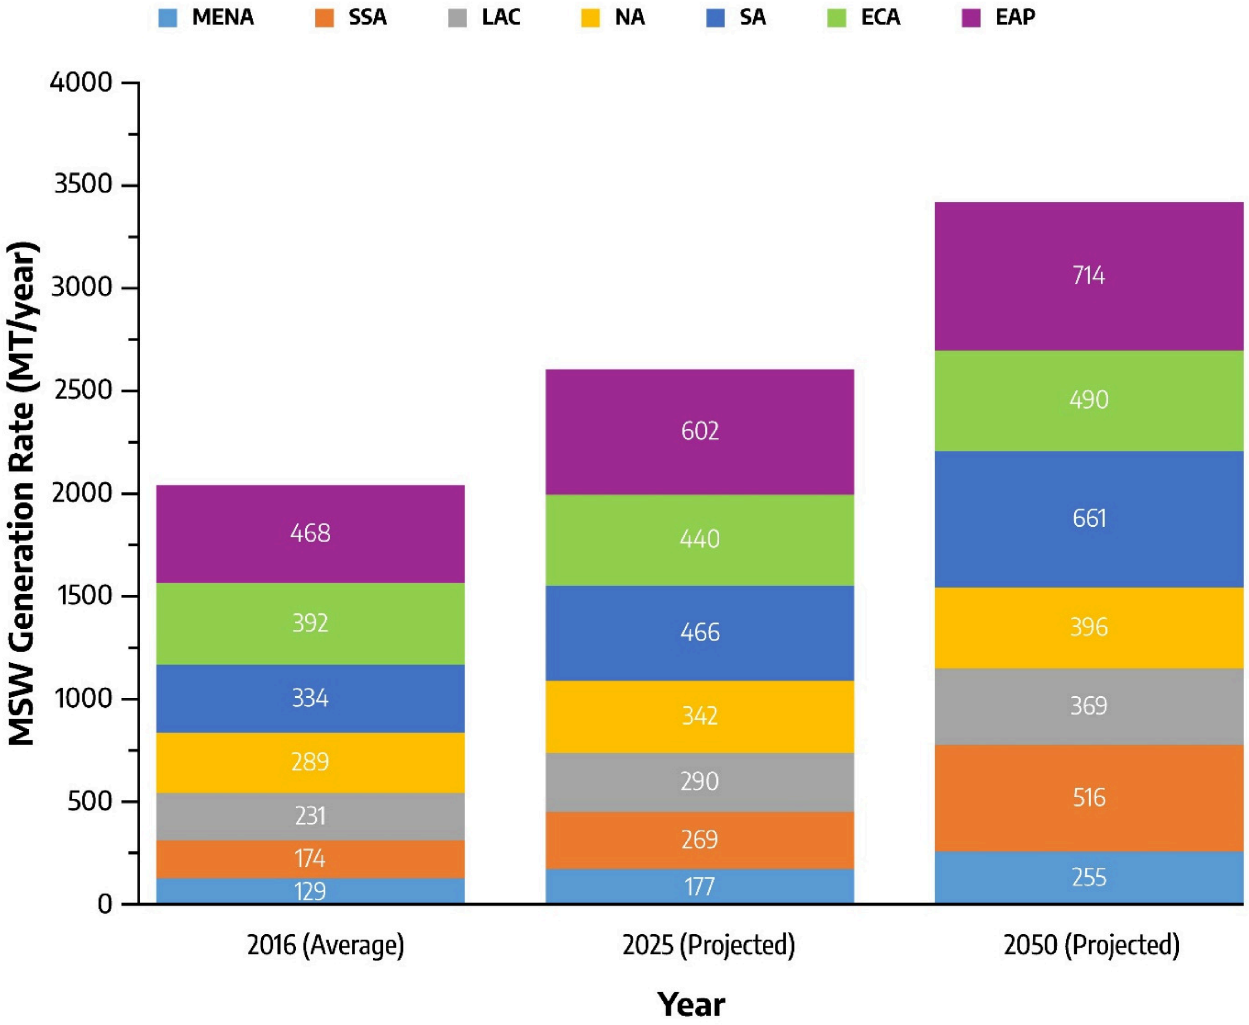


Figure 1. MSW generation by region—Middle East and North Africa (MENA), Sub-Saharan Africa (SSA), Latin America and Caribbean (LAC), North America (NA), South Asia (SA), Europe and Central Asia (ECA), and East Asia and Pacific (EAP)—projected to 2050, reflecting population growth and urbanization, data from [1].

In 2018, the U.S. Environmental Protection Agency (EPA) reported that 292 million tons of MSW were generated in 2018, with a total carbon footprint of approximately 193 million metric tons of CO_2 equivalent, primarily due to methane emissions from landfills [3]. Of this total waste, 32% (94 million tons) was recycled and composted, 11.8% (34 million tons) was used for energy recovery, and over 50% (146 million tons) was landfilled [3]. Several factors, including the pattern of higher consumption and disposal, limited recycling and energy recovery infrastructure, and inconsistent local, state, and federal-level policies and regulations, lead to higher dependency on landfilling [4]. Historical trends in MSW generation in the U.S. from 1960 to 2018 demonstrate substantial shifts in waste composition over time (Table A1). Paper waste generation peaked between 1970 and 2000, accounting for around 36% of total MSW generated. However, there was a decrease in paper waste generation after the 1980s, reaching 23.1% in 2018, likely due to increased recycling efforts and the shift toward digitalization. In

contrast, food waste generation followed a reverse trend, with continuous increases after the 1980s, reaching 21.6% in 2018 due to increased food consumption and population growth. The contributions of glass and metals to overall MSW composition have shown a downward trend from 10.5% and 11.4% in 1970 to 4.2% and 8.8% in 2018, respectively, due to the shift towards plastic packaging and the availability of more recycling facilities [5]. Overall, there has been a notable increase in food and plastic waste generation, coupled with a reduction in paper, metal and glass waste. Table A2 further shows that MSW composition varies substantially across regions. For example, Phoenix reported the highest yard waste fraction (29.91%), whereas Connecticut, Delaware, and Vermont showed relatively high food waste fractions of 22.3%, 21.1%, and 20.8%, respectively. However, these composition values are not fully standardized across studies and should be interpreted cautiously.

MSW is a heterogeneous material, comprising a variety of materials such as food, plastics, paper, yard waste, textiles, glass, metals, ceramics, and more. This heterogeneity makes it difficult to accurately estimate the quantity and quality of fuel products inherently available [6]. Maximizing material recovery from MSW begins with efficient sorting and separation, which can transform single or mixed waste streams into high-quality recyclables and energy resources. The necessity of waste characterization arises to quantify the heterogeneity of waste and standardize the waste management processes. Characterization studies on MSW generally observe the properties such as overall composition, chemical composition, physical and bulk properties, determines the feasibility of MSW as a feedstock for recycling [7–9]. MSW characterization also impacts the efficient sorting of MSW as it provides the necessary knowledge to distinguish between different fractions of MSW [10]. Automated sorting techniques, ranging from direct methods, e.g., magnetic and eddy current separation to indirect sensor-based approaches such as optical sorting, spectral imaging, and hyperspectral imaging, rely heavily on such characterization data to optimize recovery rates and ensure the quality of recyclable streams [11]. MSW sorting leads to the preprocessing and homogenization of MSW through size reduction, decontamination, and compaction. Researchers have applied different preprocessing strategies, including size reduction, screening, and homogenization, to produce MSW fractions with controlled particle sizes and improve the suitability of heterogeneous MSW for downstream conversion processes [12]. Recent studies have examined mechanical recycling, thermal processes and biological methods as key techniques for MSW bioconversion yield enhancement through waste-to-energy (WtE) conversion. However, the heterogeneous composition and complex mechanisms of MSW conversion have hindered the performance of some of the significant industrial bioconversion processes, such as biochemical and thermochemical routes.

Previous studies on MSW valorization have made important contributions to individual stages of the waste management chain, including circular economy strategies, AI-enabled waste sorting, robotic separation, waste-to-energy technologies, gasification, thermochemical conversion, regional MSW governance, and sustainable aviation fuel production from waste-derived feedstocks. However, these reviews generally emphasize specific technologies, regional contexts, or downstream valorization routes rather than integrating the full MSW value chain from generation and sourcing to characterization, sorting, preprocessing, policy, and final product pathways. To clarify the contribution of the present review relative to recent literature, Table 1 compares representative peer-reviewed MSW-related reviews published between 2023 and 2026 according to their thematic coverage across the MSW value chain.

Table 1. Recent MSW reviews published between 2023 and 2026 relative to the present bin-to-circularity framework.

Representative Review	Primary Focus	Source Management and Policy Context	Feedstock Characterization and Preprocessing	Sorting, AI, and MRF Technologies	Bioenergy and Waste-to-Energy Route	Syngas and Gasification	Biochar and Carbon Products	SAF and Drop-In Fuel Pathways	End-to-End MSW Value-Chain Integration
[13]	Solid waste technologies for energy conversion	Partial	Full	Partial	Full	Partial	Partial	No	Partial
[14]	Circular economy-based MSW management	Full	Partial	Partial	Partial	No	No	No	Partial
[15]	MSW management in Asia and Africa	Full	Partial	Partial	Partial	No	No	No	Partial
[16]	Robotic waste sorting	No	No	Full	No	No	No	No	No
[17]	Plastic–biomass pyrolysis and gasification	No	Partial	No	Full	Full	Partial	No	No
[18]	MSW gasification	No	Partial	No	Full	Full	No	No	No
[19]	Waste-to-energy technologies	Partial	Partial	Partial	Full	Full	Partial	No	Partial
[20]	Global MSW management and valorization	Full	Partial	Partial	Full	Partial	Partial	No	Partial
[21]	Solid waste biomass for SAF	No	Partial	No	Partial	Partial	No	Full	No
[22]	Segregation, WtE, and circular economy	Full	Full	Partial	Full	Full	Partial	No	Partial
[23]	Thermochemical WtE technologies	Partial	Full	No	Full	Full	Partial	No	Partial
[24]	Organic MSW in Latin America	Full	Partial	No	Full	No	Partial	No	Partial
Present review	Bin-to-circularity MSW value-chain framework	Full	Full	Full	Full	Full	Full	Full	Full

Note: Full = addressed as a major focus within the review scope; Partial = addressed as a secondary or limited topic; No = not central or not addressed. The classification shows thematic coverage rather than an assessment of study quality.

Despite recent progress, several key research gaps and technical bottlenecks continue to limit the transition of MSW management from disposal-oriented systems to circular resource recovery. First, MSW composition varies substantially across regions, seasons, collection systems, and socioeconomic conditions, making it difficult to develop universal characterization, sorting, and valorization strategies [25]. Second, many studies address only a single stage of the MSW system, which limits understanding of how upstream decisions such as source separation, moisture control, contamination removal, and preprocessing affect downstream conversion efficiency and product quality [26]. Third, major technical bottlenecks remain, including high moisture content, variable feedstock quality, hazardous or non-target contaminants, inefficient sorting of mixed fractions, tar formation during thermochemical conversion, and route-specific incompatibility between MSW fractions and valorization pathways [27,28]. Finally, the environmental and economic performance of emerging MSW technologies is often not evaluated using integrated life cycle assessment (LCA) and techno-economic analysis (TEA), limiting consistent system-level comparison.

Based on these gaps, this review is guided by four questions: (i) how MSW composition, contamination, and regional variability affect the selection of characterization, sorting, preprocessing, and valorization pathways; (ii) which emerging sensor-based technologies can improve MSW material recovery and feedstock quality; (iii) how different MSW fractions can be matched with suitable valorization routes; and (iv) what policy, infrastructure, LCA, and TEA considerations are required to support scalable circular MSW management. The central premise of this review is that MSW management cannot be optimized through isolated technologies alone but requires an integrated bin-to-circularity framework. Accordingly, future development in MSW management requires integrated approaches that combine improved waste characterization, sensor- and AI-enabled sorting, adaptive preprocessing, route-specific feedstock matching, policy support, and systematic LCA-TEA evaluation.

This review was developed through a structured synthesis of peer-reviewed articles, review papers, technical reports, and policy documents collected from Scopus, ScienceDirect, and Google Scholar. Search terms included combinations of municipal solid waste, MSW characterization, waste sorting, sensor-based sorting, AI-enabled waste management, material recovery facility, preprocessing, waste-to-energy, biochemical conversion, thermochemical conversion, LCA, and TEA. Recent studies published between 2018 and 2026 were prioritized, while older studies and regulatory documents were included when needed for background, definitions, or policy context. Sections 2–9 examine the MSW value chain from management context, sourcing, storage, collection, and transportation to characterization, sorting, preprocessing, and utilization pathways.

2. Overview of MSW Management

Solid waste handling encompasses the entire spectrum of MSW management, including storage, collection, transportation, treatment, and utilization of MSW for various applications. The final stage includes recovery and recycling, bioenergy production, energy conversion to more useful forms, and landfilling. Data collection for the composition and characterization of MSW is an important aspect of formulating a plan for its effective handling. Intensive data collection on waste management from both a global and regional perspective is indispensable, as the current dataset lacks the information for the different fractions of MSW (paper, plastic, food, textile, metal, and glass) and their composition on a wet and dry basis.

Rising global waste generation, the diverse composition of MSW across regions, varying regulatory frameworks, and technological gaps in MSW treatment methods, including

recycling and energy recovery, are important considerations for collecting more data to support sustainable waste management. Nonetheless, addressing these challenges is further complicated due to the lack of standardized terminologies used all over the world, which makes it challenging to comprehend shared challenges and opportunities in MSW handling [29].

Municipal or private collection agencies collect and transport the MSW stored in the stationary containers, e.g., bins and dumpsters to collection facilities or transfer stations. For transportation, compaction trucks equipped with features such as electronic control systems for efficient operation are used for residential waste collection. These vehicles are large self-loading compactors and container trucks designed for automatic loading of waste from residential containers, compaction for efficient transport, and exchange of storage containers at transfer stations. The transfer stations act as intermediate facilities between MSW generation sources and the processing or disposal facility, where the multiple collection vehicles drop off the MSW and the waste is loaded into large trucks, rails or barges for long-distance transportation [30]. Transfer stations enhance cost effectiveness by reducing the number of trips required in case the disposal facility is located far from the city, thereby cutting fuel, labor and vehicle maintenance costs [31]. Transfer stations eliminate the need for collection vehicles to travel long distances, which results in more frequent waste collection from residential areas, improving overall MSW collection efficiency.

3. Government Policies Influencing MSW Management

Policymaking drives effective municipal solid waste management practices by establishing the regulatory framework for achieving circular economic goals and protecting public health and the environment. Accurate data collection and analysis form the foundation for effective policymaking. Two primary conceptual approaches utilized for estimating MSW generation are "top-down" material balance models from industrial statistics and "bottom-up" measurement-based models [32]. The "top-down" approach derives data from the manufacturing phase of the material's life cycle, where the commercial statistics from industrial associations and trade unions are used to create a material flow analysis for resource productivity. Examples include waste-extended input–output (IO) models, which assess resource productivity and MSW generation [33]. The "bottom-up" model involves direct data collection from various waste management facilities, including landfills, waste-to-energy facilities, and material recovery facilities (MRFs). Data are primarily gathered through field surveys and sampling during the post-consumer use phase of the material's life cycle. In the U.S., state environmental organizations (SEOs) and certain non-governmental organizations (NGOs) voluntarily conduct audits and waste characterization studies, collected from the sub-regional or municipal level to regional, state and national estimates, which can be combined to help in the formulation of waste management policies [34].

Policy frameworks influence MSW management not only by setting disposal standards, but also by defining institutional responsibilities, quantitative targets, source-separation duties, economic incentives, and enforcement mechanisms. In the U.S., RCRA establishes the federal solid-waste baseline, but implementation depends heavily on state plans, local permitting, and enforcement capacity, leading to substantial interstate variation in definitions, reporting, and program design [35–38]. In the European Union, the Waste Framework Directive provides a more harmonized regulatory architecture by establishing the waste hierarchy of prevention, preparing for reuse, recycling, other recovery, and disposal as the organizing principle of waste policy under Directive 2008/98/EC [39]. Directive (EU) 2018/851 further operationalizes this hierarchy through binding municipal recycling targets, strengthened extended producer responsibility, and separate-collection obligations for

recyclable fractions, bio-waste, textiles, and household hazardous waste [40]. The landfill restriction introduced through Directive (EU) 2018/850, which requires municipal waste landfilled to be reduced to 10 wt.% or less by 2035, further shifts policy emphasis from disposal capacity toward prevention, recovery, and material-quality preservation [41]. In many emerging Asian and African economies, policy priorities are often sequenced differently: expanding collection coverage, reducing leakage to dumping and open burning, improving controlled disposal, integrating informal recovery, and strengthening enforcement frequently determine whether circular-economy or waste-to-value targets can be implemented reliably [42]. Accordingly, government policy affects not only where MSW is finally disposed, but also whether recovered fractions remain clean, traceable, and compatible with MRF processing, composting, anaerobic digestion, thermochemical conversion, or waste-to-fuel systems.

For MSW valorization, the European Union framework is relevant because it treats source separation and material quality as regulatory objectives rather than only operational preferences. The European Commission's guidance on separate collection emphasizes that separated streams are needed to support high-quality recycling, avoid contamination from household hazardous fractions, and improve the recovery of bio-waste, plastics, textiles, and other municipal fractions [43]. However, legal ambition does not guarantee implementation success. Recent EEA monitoring indicates that the EU is not yet on track to substantially reduce material footprint and total waste generation by 2030, suggesting that recycling targets and separate-collection mandates must be complemented by stronger prevention, reuse, consumption reduction, and enforcement measures [44].

The Resource Conservation and Recovery Act (RCRA) of 1976 serves as the foundation legislation for solid waste management in the U.S. [37]. Under title 40 of the Code of Federal Regulations (CFR), the EPA provides guidelines on the development and implementation of state solid waste management plans encompassing policies, procedures and criteria for effective regional solid waste management planning outlined in Sections 4002 (a,b) of the Solid Waste Disposal Act [36]. It regulates the landfill design, operation, and closure to ensure compliance with these standards, which are enforced at the county level by federal and state governments through inspections, permits, and penalties for non-compliance with prior approval from the EPA. These plans must clearly define the roles and responsibilities of state and local authorities, allocate federal funding to the responsible authorities, and establish strategies for implementing and coordinating regional planning, as specified in Section 4006 (b) [38]. Section 4005 (c) prohibits the establishment of new open dumps, mandating that all solid waste must be either utilized as a resource or disposed of in a sanitary landfill (compliant with Section 4004 (a)) [36].

Although public involvement strategies are incorporated into yearly work plans, as mandated by 40 CFR 25.11, community-level engagement varies significantly [45]. While Title 40 of CFR emphasizes the EPA's mission to protect human health and the environment, practical implementation at the various county levels is often hindered by challenges such as irregular inspections of landfills, delays in issuing permits, and insufficient enforcement of regulations. Moreover, cross-state comparison of national MSW management data is not reliable due to differences in MSW composition, local infrastructure and state policies [35]. This disparity requires states to have specific guidelines and regulations for solid waste management plans aligned with federal requirements, allowing states to adopt a flexible approach to address unique challenges related to waste type, population density and economic factors. For instance, Missouri's solid waste management laws meet federal RCRA Subtitle D requirements and include additional provisions for permitting, inspections, enforcement, investigation, and solid waste cleanup [46]. State-level regulations are often more stringent than the EPA guidelines. The Texas Administrative Code

(Title 30) defines MSW more broadly than the EPA as 'solid waste resulting from or incidental to municipal, community, commercial, institutional and recreational activities, including garbage, rubbish, ashes, street cleanings, dead animals, abandoned automobiles and all other solid waste other than industrial solid waste [47]. Other types of waste, such as hazardous and toxic, require separate policies and frameworks for handling. The RCRA Act of 1976 authorizes the EPA to oversee the hazardous waste life cycle and establishes a framework for managing hazardous solid waste [48]. Prior to 1980, hazardous materials were often co-disposed with the MSW [49]. However, the amendments to the RCRA act in 1984 required the development of environmentally protective landfill standards and emphasized long-term strategies for managing hazardous waste, including waste reduction, efficient transportation, proper disposal, and increased recycling rates [50]. In 1990, the Coalition of Northeastern Governors (CONEG) passed the Model Toxics Reduction Act, which mandates reductions in toxic substances such as cadmium, mercury, lead, and hexavalent chromium in packaging materials [51]. This regulation has been widely adopted in nineteen states to reduce the disposal of hazardous waste in landfill [52]. The EPA also regulates certain "household hazardous wastes", limiting disposal of 220 pounds per month per family or small business, allowing safe co-disposal with residential solid waste [53]. Another significant waste category in solid waste management is "white goods", which includes discarded domestic and commercial appliances like washers, stoves, and refrigerators. Many states have enacted bans on the disposal of white goods in landfills and approximately 75% of these appliances are made of steel, which is typically recycled [54]. Across the U.S., individual states and cities have enacted various waste disposal bans. North Carolina has established bans on the disposal of white goods, aluminum cans, scrap tires, lead-acid batteries, plastic bottles, computer equipment and televisions [55]. According to the Electronics Recycling Coordination Clearinghouse (ERCC), 25 states, including the District of Columbia, have passed legislation promoting the reuse and proper recycling of e-waste [56].

The U.S. EPA has included waste reduction and reuse as part of its sustainable waste management. The 'reduce, reuse, recycle' program encourages sustainable consumer behavior, such as 'thinking before buying', while aiming to enhance the recycling facilities, minimize contamination, and support efforts to reduce greenhouse gas emissions by 50% [57]. According to the EPA's Fiscal Year 2022–2026 strategic plan (objective 6.3), significant focus has been given on reducing food waste and ensuring safe disposal of 2.96 billion tons of solid, industrial, and hazardous waste [58]. However, current U.S. policies, such as the RCRA Act, emphasize waste disposal over waste reduction. Furthermore, the MSW management is primarily overseen by individual states, leading to a fragmented approach [59]. States such as New York have legislated the installation of biogas capture for landfills having a waste capacity of 2.5 million m^3 and with an annual NMVOC emission rate greater than or equal to 34 Mt [60]. Such policies are aimed at reducing the overall greenhouse gas (GHG) emissions and making reusing and recycling more lucrative compared to landfilling. Programs such as extended producer responsibility (EPR) make the producers responsible for managing their products at end-of-life, incentivizing more sustainable and innovative product designs [61]. EPR frameworks include California Senate Bill-54, which delegates the responsibility of recycling plastics and packaging material to the manufacturers [62]. Many states set rules on single-use plastic bags, polystyrene, or require itemized provision of single-use service ware (e.g., Washington State restrictions that require customers to request utensils). These laws reduce MSW generation upstream [63].

International policy pathways should not be interpreted through a simplistic developed–developing country divide, but through the institutional and operational con-

ditions that determine implementation, including legal targets, enforcement capacity, collection coverage, market incentives, and infrastructure readiness [64,65]. China provides an example of an emerging-economy governance model that has moved from disposal-centered management toward source reduction, recycling, reduced landfill dependence, and environmentally sound disposal through its "Zero-waste City" pilot program [66]. At the implementation level, reported outcomes from Shenzhen, Xining, Panjin, and Tongling indicate that such policies can reduce GHG emissions from household waste by 3–15%, although performance remains strongly dependent on local infrastructure, treatment routes, and implementation capacity [67].

India provides a complementary example of regulatory formalization in an emerging Asian economy. The Solid Waste Management Rules, 2026, mandate four-stream segregation of solid waste at source into wet waste, dry waste, sanitary waste, and special care waste; define responsibilities for bulk waste generators; introduce environmental compensation for non-compliance under the polluter-pays principle; formally recognize MRFs for sorting and further processing; and strengthen restrictions on landfilling by limiting landfill disposal to non-recyclable, non-energy-recoverable waste and inert materials [68]. Economic instruments also shape MSW generation and sorting behavior: Japan's pay-as-you-throw model demonstrated a 20–30% decrease in residual waste [69], while Germany's comprehensive segregation system separates waste into streams such as paper, glass, light packaging, and biodegradable materials [70]. These examples show that policy effectiveness depends not only on formal regulation, but also on citizen participation, source-level sorting behavior, market access for recovered materials, and the technical capacity to keep streams separated before recovery.

African policy frameworks show a different but increasingly formalized trajectory. South Africa's National Waste Management Strategy 2020 places circular economy at the center of national waste policy and emphasizes waste minimization, effective and sustainable waste services, compliance, enforcement, public awareness, separation at source, waste-picker integration, organic waste diversion, MRF development, and local-government implementation capacity [71]. At the continental level, the African Union Circular Economy Action Plan for Africa 2024–2034 calls for embedding separation between hazardous, organic wet, and inorganic dry waste into regulation, expanding collection, transfer, treatment, recycling, and reverse-logistics infrastructure, improving waste statistics, strengthening enforcement capacity, and recognizing informal-sector participation in waste management and recycling [72]. These policy examples indicate that African circular-waste strategies are not limited to disposal management; they increasingly target institutional capacity, data systems, source separation, infrastructure finance, and inclusion of informal recovery systems as prerequisites for MSW valorization.

The EPA promotes waste-to-energy initiatives, while the federal government supports various recycling programs, establishes recycling targets, and provides funding for recycling infrastructure under policies such as the 'Save Our Seas 2.0 Act' [73]. Furthermore, the U.S. government collaborates with international organizations to address global waste management challenges. This cooperation includes sharing the best practices for the recovery and valorization of the MSW stream to reduce landfill dependency. For resource recovery, the local authorities may establish long-term contracts for the delivery of solid waste to MRFs [57]. The compositional analysis at these facilities is critical, as it directly impacts the recovery potential of material and energy [74]. However, there exists a gap in framing the standardized methods for assessing fuel value, and determining the reclaimed proportion of industrial waste, paper, glass and metals. In the U.S., waste management programs typically focus on separating wet garbage from dry recyclables [75].

The uneven performance of recycling in the U.S. can be attributed in part to the absence of a comprehensive national recycling policy framework [76]. The U.S. recycling system was also affected by its historical dependence on China as an export destination for recyclables; after China implemented the National Sword Policy in 2017–2018, restrictions on recyclable imports exposed weaknesses in domestic recycling capacity and contributed to a broader recyclable-management crisis [25]. To address these constraints, the U.S. EPA developed the National Recycling Strategy, which aims to increase the recycling rate to 50% by 2030 through five strategic objectives: expanding recycling markets, improving collection and infrastructure, reducing contamination in recyclable materials, strengthening policies, and standardizing data collection protocols [77]. Despite these efforts, implementation remains constrained by the absence of comprehensive nationwide legislation. The U.S. EPA itself acknowledges that successful implementation of the National Recycling Strategy requires collaboration across federal, state, tribal, and local levels of government [37].

Taken together, this policy trajectory shows that U.S. MSW governance has progressed from landfill standards and hazardous-waste control under RCRA toward broader recycling, food-waste reduction, and circular-material strategies. However, the U.S. case also illustrates a central policy limitation: without comprehensive nationwide recycling legislation, harmonized data protocols, and consistent state-to-local implementation, recycling performance remains fragmented [37,76,77]. In comparison, the EU relies on binding circular-economy targets, separate-collection obligations, EPR requirements, and landfill-diversion mandates [39–41], while emerging Asian and African policy frameworks increasingly emphasize phased institutional formalization, infrastructure development, enforcement capacity, and inclusion of informal or decentralized recovery systems [42,71,72]. Therefore, the effectiveness of MSW policy should be evaluated not only by formal targets, but also by whether governance systems create the legal, economic, and institutional conditions needed to support reliable material recovery, organics treatment, thermochemical conversion, biochar production, and waste-to-fuel pathways.

4. Sourcing of MSW

The effectiveness of MSW management is influenced by various factors, including geographical location, climate, seasonality, human resources and availability of waste disposal facilities [14]. MSW sourcing impacts the handling severely. Systematic control over MSW sourcing can minimize the negative effects of waste exposure on public health, the ecosystem and overall quality of life [78]. MSW, being a heterogeneous mixture generated from diverse sources, reflects the broader human activity, behavior, and culture.

Identifying the source of MSW is crucial for understanding generation trends and management strategies. Although MSW sources are generally classified into residential and commercial categories, this classification should not be interpreted as a uniform global baseline because the quality, recoverability, and downstream compatibility of each source-defined stream are strongly shaped by regional collection systems, source-separation practices, infrastructure maturity, informal-sector participation, and policy enforcement. Therefore, this section distinguishes three broad sourcing contexts: (i) the United States, where MSW characterization and management are often assessed through state-level studies and regional regulatory variation [79–81], (ii) the European Union, where municipal waste sourcing is increasingly shaped by legally mandated separate collection and waste-stream quality requirements under the Waste Framework Directive and its implementation guidance [43], and (iii) emerging economy settings in Asia and Africa, where collection coverage, source separation, organic-rich waste streams, informal recovery, and leakage to open dumping or burning remain major determinants of material quality and downstream valorization potential [1,42].

Residential sources are further classified into single-housing and multi-housing residential sources based on the collection methods [82]. The efficiency of MSW sourcing depends upon the choice and frequency of MSW collection, source separation of MSW into organics, hazardous materials, and general waste [83]. To better understand the implications of MSW sourcing, Figure 2a provides a comprehensive visualization of MSW generation, composition of different fractions and proportions managed through recycling, landfill and combustion in the U.S. This showcases the predominance of landfilling facilities as the largest disposal method receiving 146.12 Mt MSW where major fractions were food waste, paper and plastic waste. The recycling and composting facilities in the U.S. account for 111.69 Mt with significant contributions from paper and cardboard, food waste, metal and plastics. The limited fraction of waste going to waste-to-energy combustion facilities (34.55 Mt) is due to the strict regulations and high capital and operational costs required for setting up the combustion plants. Figure 2b shifts the focus to the global scale for MSW generation, composition of different fractions and comparison of the fraction of MSW going for recycling, landfill, and combustion facility.

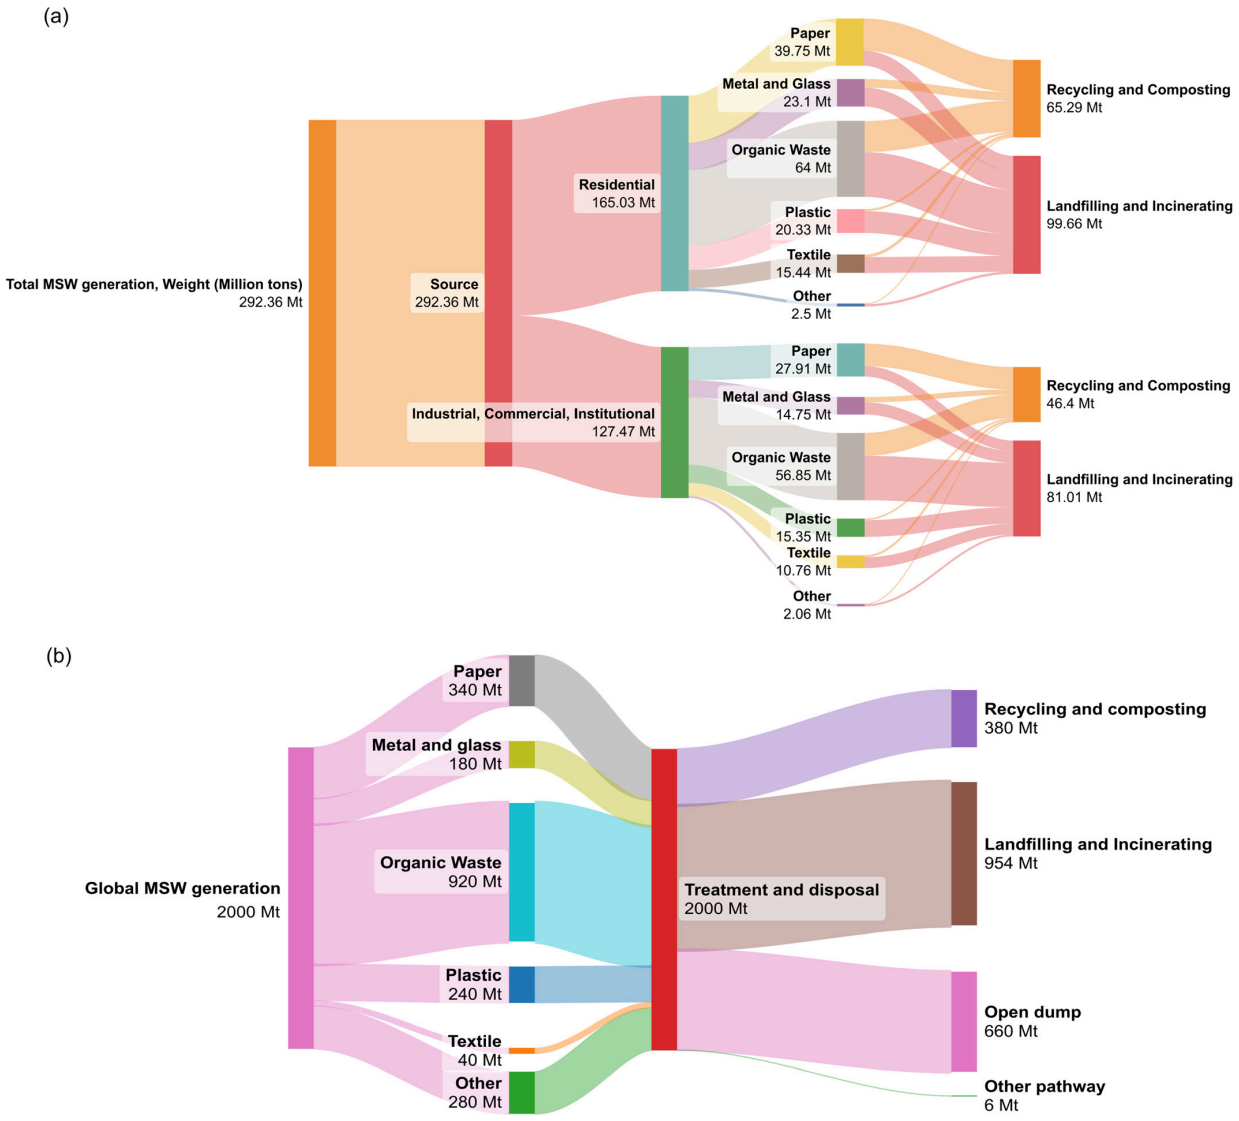


Figure 2. Sankey diagrams showing MSW generation, composition, and treatment pathways [1]. (**a**) U.S. MSW generation in 2018 based on the U.S. EPA report on materials and waste management, data from [84], (**b**) Global MSW scenario based on the World Bank report on the global snapshot of solid waste generation by 2050 [1].

While reviewing the waste characterization studies, a lack of comprehensive end-to-end research was observed on MSW sourcing. This gap can be attributed to the complexity and the variability in waste management systems across different regions. Variation in waste generation patterns, collection patterns and socioeconomic factors significantly impact the characterization of MSW sourcing. To address this heterogeneity, the integrated Internet of Things (IoT) and AI offer promising solutions for predicting patterns and the sustainable management of the MSW [85], which have been discussed in detail in our previous review [27]. Implementation of AI can facilitate smart waste sorting, predictive modeling, and optimization of conversion technologies by accurately forecasting MSW sourcing trends.

Evaluating the environmental and economic impact of MSW sourcing is essential and can be achieved through LCA and TEA. Laurent et al. reviewed 222 LCA studies on solid waste management systems, observing that many focus on specific waste types or methodological aspects [86]. Laso et al. investigated pneumatic collection systems for residential sources and found them to be significantly more effective in reducing emissions compared with the conventional collection system [87]. Banar et al. analyzed five scenarios incorporating variable sources, collection methods, and management pathways, concluding that source separation of organic waste can significantly lower the emissions [88]. While TEA studies provide critical insights into the economic impact of MSW sourcing, they are often limited to the handling and transportation stages, with few focusing on the sourcing phase [89,90]. Accordingly, the following subsections examine MSW sourcing in the United States and comparative global contexts, with emphasis on how regional collection systems, source-separation practices, and management infrastructure shape feedstock quality and downstream valorization potential.

4.1. MSW Sourcing in the U.S.

4.1.1. Residential Sources in the U.S.

Residential MSW, often referred to as 'garbage' or 'trash', is primarily generated by single-family and multi-family households and typically includes post-consumer packaging materials such as plastic, paper, food waste, and metal containers. Residential MSW constitutes a significant proportion of a country's total waste, with rural and urban areas exhibiting distinct waste compositions. Studies indicate that approximately 40% of residential MSW consists of organic waste, predominantly from food waste [91].

State-based characterization studies in the U.S. highlight several consistent patterns in residential waste composition. The scarcity of recyclable paper, such as old-corrugated containers (OCC), is often linked to the success of curbside recycling programs. California's waste characterization study highlights the importance of such a program, reporting reduced prevalence of OCC in residential MSW [91]. Similarly, plastic materials are prevalent components of residential MSW, posing significant challenges for recycling and resource recovery. Studies in California and New York document a wide variety of plastics in residential MSW [92,93]. Additionally, construction and demolition (C&D) debris are often mistakenly disposed of in residential waste, reflecting the need for public awareness campaigns. The New York City waste characterization study has identified such contamination in residential MSW [92]. However, the presence of electronic waste (e-waste) in residential MSW is relatively low due to the programs available in most states to divert it.

Urban and rural areas differ significantly in waste generation and composition. Pathak et al. report that per capita waste generation was maximum for urban sources (0.14 kg/day) compared to rural sources (0.10 kg/day). Rural households typically produce higher quantities of organic waste due to greater dependency on homegrown or unprocessed food. In contrast, urban homes generate more plastic waste, driven by the higher consumption of

packaged foods and single-use plastics [94]. Figure A1 shows the trend in residential MSW generation across various states of the U.S. The finding in this table highlights the need for region-specific waste characterization and management strategies to improve efficiency of recycling.

Household hazardous waste (HHW) adds another layer of complexity to residential MSW management. This category includes common household waste like paints, cleaning chemicals, batteries, and pesticides, all of which require separate handling and disposal protocols. These materials are prohibited from regular waste disposal and are instead collected separately at designated drop-off stations. In the U.S., the EPA mandates specific federal disposal procedures for ozone-depleting refrigerants dumped by households [95].

4.1.2. Commercial Sources in the U.S.

Commercial MSW sources are generated by small businesses, warehouses, educational institutes, government offices, and restaurants, excluding construction and demolition waste [79]. The composition of commercial MSW varies regionally due to the diversity of commercial and industrial establishments in the region. As illustrated in Figure A2, commercial MSW composition varies considerably across U.S. states. Organic waste and paper waste are the dominant fractions in most states, although their relative contributions differ substantially. Delaware, Pennsylvania, and Michigan show high organic waste fractions of approximately 36–42%, whereas Hawaii, Tennessee, and Rhode Island show higher paper fractions of approximately 32–41%. Plastic waste remains within a narrower range of approximately 14–20%, indicating its persistent presence across commercial waste streams. In contrast, metals and glass contribute relatively small fractions, generally below 6%, which is largely due to the high recycling rates or reduced glass usage in packaging.

4.2. MSW Sourcing in Comparative Global Context

4.2.1. Residential Sources in the Global Context

Residential waste sourcing worldwide exhibits similarities to U.S. practices in terms of collection but varies substantially by region. In Europe, source-segregated waste collection is a priority, whereas many Asia-Pacific settings continue to rely on mixed collection systems. Conversely, regions such as Africa and Latin America often have limited residential MSW collection infrastructure [1]. In the European Union, this source-segregated approach is increasingly structured through the Waste Framework Directive and its implementation guidance, which require separate collection for paper, metal, plastic, and glass and progressively incorporate bio-waste, textiles, and household hazardous waste into separate collection obligations [43]. This upstream separation is important because it preserves material quality, reduces cross-contamination, and improves the suitability of residential waste fractions for composting, anaerobic digestion, high-quality recycling, MRF processing, and waste-to-energy applications.

The residential MSW generation patterns show disparities across regions, with developed countries like France, Germany and the United Kingdom producing significantly higher volumes of residential waste annually as compared to developing countries [96]. This difference can be attributed to economic development, consumption behavior, packaging intensity, urbanization, and waste management practices. However, generation rate alone does not determine valorization potential. For example, a source-separated EU bio-waste stream, a mixed residential residual stream, and an incompletely collected organic-rich stream in an emerging economy are not functionally equivalent feedstocks, even when they contain similar nominal fractions of organics, paper, plastics, or glass [1,42]. Their moisture content, contamination burden, market value, and compatibility with downstream recycling or conversion depend strongly on how the waste is generated, collected,

separated, and regulated, because source separation improves material quality and reduces contamination [43,71], while incomplete collection and uncontrolled disposal increase material loss and degradation [42].

In emerging Asian economies, MSW sourcing is often heterogeneous because rapid urbanization, high organic waste fractions, variable municipal capacity, and informal recovery systems can coexist within the same national or regional waste-management system [1,42]. China's "Zero-waste City" pilot program provides one example of a system-level urban governance model that aims to reduce solid waste generation, promote recycling, reduce landfill dependence, improve environmentally sound disposal, and develop replicable city-level management models [66]. At the city level, the implementation of China's zero-waste pilot framework varies substantially across Shenzhen, Panjin, Xining, and Tongling, reflecting differences in MSW composition, collection and treatment systems, infrastructure capacity, and local management strategies [67]. China therefore illustrates how some emerging Asian policy frameworks are moving beyond disposal-centered management toward integrated source reduction, recycling, and environmentally sound disposal strategies.

In African contexts, MSW sourcing is frequently constrained by incomplete waste service coverage, limited separation infrastructure, informal recovery networks, and leakage to open dumping or uncontrolled disposal [42]. South Africa's National Waste Management Strategy 2020 identifies separation at source as a mechanism for producing more homogeneous and higher-value waste streams, reducing contamination, and supporting diversion from landfill [71]. At the continental level, the African Union Circular Economy Action Plan for Africa 2024–2034 calls for embedding waste separation between hazardous, organic wet, and inorganic dry waste into regulation, while also expanding collection, transfer, treatment, and recycling infrastructure [72]. Together, these examples show that residential MSW sourcing should be interpreted not only through waste composition, but also through the maturity of collection systems, source-separation practices, informal-sector integration, and infrastructure for safe treatment.

Per capita hazardous waste generation varies across countries, and the lack of standardization challenges makes global comparison challenging. Implementing specific sorting for this waste is crucial, as improper sorting can disrupt the recycling process. Alarmingly, recent reports indicate a rising trend in hazardous waste generation in countries like China and across the European Union since 2014–2015 [97]. This issue is directly linked to residential MSW quality because household hazardous fractions require dedicated handling and can otherwise compromise the quality and recovery potential of otherwise recyclable or biologically treatable residential waste streams [43].

4.2.2. Commercial Sources in the Global Context

Commercial waste management poses a global challenge due to the diverse composition of the waste streams and the variability of commercial facilities. Commercial MSW generally represents household-like waste generated by non-household sources, including commerce and trade, small businesses, offices, public institutions, markets, restaurants, and similar establishments, while excluding construction and demolition waste, industrial process residues, agricultural waste, and sewage-related waste [98]. Factors such as per capita income and the nature of industrial sectors in each region heavily influence waste generation patterns. Most countries show an upward trend in the generation of commercial waste streams, with notable exceptions being Germany and Japan [99]. This decline could be attributed to stringent policies promoting the source separation of MSW. Despite the declining trends, Germany and Japan still exhibit the highest generation of commercial MSW, which indicates the extensive presence of commercial and industrial establishments [99].

Commercial sources are treated differently across regions due to variations in regulatory obligations, collection responsibilities, market incentives, and enforcement capacity. In the European Union, commercial municipal waste and household-like waste from non-household sources are increasingly affected by separate collection requirements and recycling-quality objectives under the revised Waste Framework Directive and its implementation guidance [43]. In the specific case of Germany, the responsibility for commercial waste disposal lies directly with the country's 3.6 million businesses, and the implementation of Germany's five-step waste management strategy is governed by the Commercial Wastes Ordinance (GewAbfV), which mandates the separation and recycling of various waste streams, including paper, cardboard, glass, plastics, metals, wood, textiles, biowaste, and other production-specific waste fractions [100].

In emerging Asian contexts, commercial MSW should be interpreted within broader municipal systems that are still transitioning from mixed collection and disposal-centered practices toward official source-separation programs. Source separation has been identified as a pivotal component of integrated MSW management and circular economy development in Asian cities, although many cities still receive mixed waste without pretreatment or continue to rely on open dumping [101]. Therefore, commercial sourcing strategies in Asian cities should emphasize enforceable separation rules, stakeholder participation, incentive mechanisms, education campaigns, and pilot-scale implementation before wider system expansion [101].

In African and other developing-country contexts, commercial MSW is frequently shaped by markets, restaurants, small shops, offices, and informal or small-scale recovery systems. Markets can be particularly important commercial sources because they often generate organic-rich and biodegradable waste streams, which require reliable collection and separation to avoid contamination of dry recyclables and loss of valorization potential [102]. The African Union Circular Economy Action Plan for Africa 2024–2034 further highlights the need to improve waste data, expand collection and valorization infrastructure, and strengthen private-sector and business participation in circular waste systems [72]. Consequently, commercial sourcing strategies in these contexts should prioritize collection reliability, controlled disposal, separation of wet organics from recoverable dry materials, and contamination control before scaling advanced material recovery or conversion routes. This sequencing is important because a clean source separated commercial paper stream, a mixed commercial residual stream, and an incompletely collected organic-rich commercial stream are not equivalent feedstocks. Their moisture content, contamination load, market value, and suitability for downstream recovery or conversion depend on how they are sourced, collected, separated, and regulated [72,102].

4.3. Flow of Residual MSW to Landfills

Residual MSW, which remains after recycling and material recovery, is often processed at MRFs before being transported to landfills. Contaminated materials, multi-layer plastics (e.g., juice boxes, laminated chip bags, cardboard with plastic liners), and industrial composites often enter landfills due to inadequate recycling infrastructure [103]. Additionally, other materials such as plastic containers with food or oil residues and specific plastics like polyvinyl chloride (PVC) and polystyrene, are discarded in landfills despite their recovery potential due to high processing costs and insufficient recycling infrastructure [104]. Similarly, materials including hazardous waste, low-value metals, non-recyclable e-waste, and rubber are also landfilled due to contamination, high separation costs, or insufficient demand for recovery [105].

Residual MSW follows a systematic pathway starting from the generation point (residential and commercial sources) to collection points, MRFs, and finally, landfills. At

MRFs, advanced technologies like eddy current separators, magnetic separators, optical sorters, and air separation methods are used to extract recyclable materials. The remaining residuals, which are often contaminated or non-recyclable, are transported to landfills using specialized vehicles designed for handling large volumes of waste. Demetrious et al. compared the composition of residuals at MRFs in Australia, the UK and Canada, which found that the primary constituents of residuals were organics, plastic, paper and glass [106].

5. MSW Handling, Collection, and Transportation

The four major methods employed for MSW collection are curbside/alley, drop off, door-to-door, and pneumatic collection [107,108]. In the U.S., the most common methods employed for MSW collection are curbside collection and drop-off systems. However, local municipalities require door-to-door collection for waste such as hazardous and bulky materials, which generally do not fit into the curbside bins [109]. Curbside collection involves residents placing waste into designated containers of various types and sizes, typically located a short distance from the residential establishments. Separate bins are allocated for collecting different fractions of MSW, including organic waste (food waste and compostables), recyclables (bottles, cans, jars, cardboard, cartons and paper) and landfill (wrappers, styrofoam, plastic bags and plastic utensils) [110]. Dedicated trucks, usually equipped with compactors, are responsible for the transportation and management of these containers [111]. However, curbside collection may present public health concerns due to odor generation from food waste, especially if there is a significant delay in the collection of waste. To address the challenge raised by curbside collection, particularly in relation to public health, and to make the collection and transportation system more efficient, recent efforts have focused on optimizing the waste collection routes. These research advancements include estimating container fill times, promoting source separation through flow distribution models [108], vehicle routing mechanisms [112], developing mathematical models to define optimum road networks for MSW collection [113] and using GPS-based algorithms to reduce fuel consumption [114].

Drop-off methods are designed for collecting recyclable materials and other materials such as bulky non-recyclable waste, e.g., furniture and construction debris, special waste streams from any specific location and non-recyclable residuals from the recyclables stream, which end up in the landfills [115]. Once MSW is source-separated, it is brought to designated drop-off locations equipped with color-coded containers, in which each color represents a specific type of waste [116]. These locations often include facilities for compacting, shredding, and baling to streamline large-scale MSW handling. In many developed countries, these facilities can handle waste types such as glass, furniture and electronic appliances. However, this system has not been widely adopted in densely populated countries due to space requirements, high investment costs, the heterogeneity of MSW and the need for adequate infrastructure [117].

Door-to-door collection, commonly found in South Asian countries, involves collectors picking up waste directly from households. This method is convenient for residents but can be impacted by climate and terrain. However, rapid urbanization and industrialization have hindered the effective implementation of this approach in developing countries. Recent research highlights a reduction in the efficacy of this method, where the majority of MSW in developing countries consists of organic matter (64–80%) and minimal recyclable streams (11–15%) [118,119]. The high moisture content of MSW complicates the sorting process and poses challenges for onsite processing. To improve door-to-door collection in developing countries, effective policies, new technologies and the use of software applications for real-time monitoring are essential.

Although pneumatic collection methods are modern and efficient solutions considered as alternatives to the above-mentioned techniques and are commonly employed in highly developed urban areas, their use in the United States remains limited due to high initial investment and energy consumption. These systems use a centralized piping infrastructure to collect MSW from residential buildings. The pneumatic system operates by using airflow to suction waste from collection bins installed in each apartment to a central collection facility. At this facility, waste is sorted into specific categories such as paper, plastic, and food, followed by preprocessing either onsite or transportation to a specific treatment plant [120]. The collection and transportation of MSW is the biggest contributor to the handling costs of MSW. It involves moving MSW from its source to transfer stations, processing facilities, or disposal sites. The cost associated with collection and transportation has a significant impact on waste management plans. In both developed and developing countries, the cost allocated to this sector is approximately 50–75% and 70–90%, respectively, due to high labor demands [121].

Separation of waste into various streams is crucial when mixed waste stream collection occurs, as it is essential for the treatment and utilization of MSW. The collected MSW is sent to an MRF for separating waste into different waste streams, such as recyclable and non-recyclable residuals (also known as residual MSW). The recovered waste stream is then sold to the market, while the remaining non-recyclable residuals are sent to a landfill for disposal [122]. However, treatment of solid waste is required before the utilization and disposal of a particular waste stream. In the U.S., municipalities use a variety of treatment methods depending upon the nature of MSW. From a waste-to-energy perspective, these methods are thermal treatment (incineration as the most widely used method, followed by gasification and pyrolysis) and non-thermal methods (landfilling and anaerobic digestion) [123]. The residual MSW is typically sent to the landfill or incineration plant after treatment. Also, in big cities such as New York, the materials (made up of paper, plastic and other industrial composites), which are not easily recyclable or do not have high market demand, are more suitable and preferred waste streams for waste-to-energy plants for incineration. The residual ash coming out from incineration plants is used in construction projects. Lancaster County in Pennsylvania has a separate waste-to-energy facility, operated by Covanta Holdings Corp., which processes approximately 1200 tons of MSW while maintaining air emissions below the set limits [124].

6. Characterization of MSW

Waste characterization is a critical and continuous process that plays an important role in every phase of the MSW management system. After sourcing and collection, it helps in identifying the composition of the generated waste, which is crucial for effective waste management. During transportation, it aids in selecting the appropriate handling methods and optimizing the logistics based on properties such as bulk density and moisture content of waste. At the disposal stage, characterization data help ensure the most suitable processing of waste [125]. MSW characterization is fundamental for minimizing waste generation and planning a suitable management and valorization strategy [126]. However, the heterogeneous nature of MSW presents significant challenges for accurate characterization. Characterization requires differentiation based on the physical, chemical and biological properties of waste. Additionally, it may involve assessing the thermal properties (such as calorific value, combustion efficiency), optical and visual properties (such as color, reflectance, transmittance and transparency), structural properties (such as tensile strength, porosity, rigidity) and electromagnetic properties such as conductivity and dielectric behavior [127,128].

The physical characterization focuses on moisture content, bulk density and particle size of different components of MSW. Particle size plays a crucial role in determining the design of crushers and mechanical separators, influencing the efficiency of material handling. For example, a smaller particle size provides a large surface area to the microbes during anaerobic digestion, enhancing the degradation and increasing biomethane yield [129]. In addition, bulk density measurement of solid waste is crucial to control the conversion process, like incineration and pyrolysis, where density can affect combustion or thermal decomposition rate and the quality of bioproducts formed [130]. The determination of chemical characteristics of MSW is important for evaluating the potential for energy recovery and environmental impacts within the waste management system. Proximate analysis quantifies the volatile content, ash, and fixed carbon. These parameters are critical for determining the energy potential of the waste and for selecting appropriate thermochemical routes such as combustion, pyrolysis, or gasification [131]. Ultimate analysis determines the elemental composition of waste, i.e., carbon, oxygen, hydrogen, phosphorus, potassium and C/N ratio [131]. A high content of carbon and hydrogen indicates greater combustibility, which is important for the incineration process [132].

Similarly, the presence of high concentrations of biodegradables in MSW indicates less elemental carbon content, whereas non-biodegradable fractions contribute to higher carbon levels in MSW [130]. The biological properties of MSW are assessed to quantify its degradability and biogas production potential. One critical parameter is biochemical methane potential (BMP), which determines the capacity of organic waste to produce methane during anaerobic digestion. Additionally, volatile solids, cellulose, hemicellulose, and lignin contents influence the biodegradability of MSW. Microbes excrete specific enzymes that can digest cellulose, polysaccharides and proteins into fatty acids, amino acids and sugars [133].

6.1. MSW Characterization Protocols

The EPA advocates two approaches for the characterization of MSW: (1) sampling, sorting, and weighing individual waste components, and (2) a material flow approach utilizing production data for the materials and products [134]. The first approach described above requires a certain confidence level for the assessment results. The waste characterization follows guidelines such as (i) ASTM D5231-92 [135] which outlines a standard test method for the determination of the composition of unprocessed MSW, and (ii) the UNEP framework for developing an integrated solid waste management plan, including waste characterization and quantification [136]. The ASTM D5231-92 protocol, titled "Standard Test Method for Determination of the Composition of Unprocessed Municipal Solid Waste", provides a systematic framework for sampling and manually sorting MSW into broad material categories. It is primarily designed to offer a simple, reproducible approach suitable for classroom demonstrations, training, and educational exercises, rather than for high-resolution waste characterization. While it helps illustrate general waste composition trends, the method lacks the granularity required for assessing recyclability, as it does not differentiate between recyclable subcategories (e.g., different plastics, paper grades, or contamination levels) nor capture material quality metrics critical for material recovery facilities. UNEP has listed a procedure for sample collection that includes listing material types, determining the required sample size based on 80% or 90% confidence level and considering factors such as the timing of sample collection, seasonal variations, site selections and analytical methodologies [137]. The waste could be classified by origin (industrial, consumer or commercial) and destination (landfill, recycling and other ways). Each U.S state has its own material classification; for example, California uses a standard list of 67 material category [81].

6.2. Detection and Characterization of Hazardous Waste Material in MSW

A hazardous waste characteristic indicates a waste poses a significant risk, warranting its classification as hazardous. The EPA classifies hazardous waste into four categories: the F-list (non-specific waste), K-list (source-specific waste), P-list (discarded commercial chemical products) and U-list (similar to P-list) [95]. Additionally, the EPA defines that waste could still be classified as a hazardous waste if it exhibits any of the four physical/chemical characteristics—ignitability, corrosivity, reactivity and toxicity as explained in Table 2 [138]. As per the regulations set by the U.S. EPA under the RCRA Act, solid waste can be identified as hazardous in two ways. Waste can be classified as hazardous either if it exhibits specific hazardous properties or if it is listed by the EPA as hazardous based on a criterion that it poses significant current or potential risks to human health or the environment [139]. While it may initially appear straightforward to distinguish between hazardous and nonhazardous waste through chemical and toxicological analysis, additional factors must be considered to assess the actual level of hazard posed by waste chemical composition [138]. Subtitle C, outlined in RCRA sections 3001–3023, establishes the nationwide hazardous waste management program, such as the identification and categorization of hazardous wastes, and the establishment of standards for generators, transporters, and owners. It also includes operators of treatment, storage, and disposal facilities, as well as provisions for permitting, inspections, and enforcement. Interestingly, most of the states have received authorization to implement some or all of the RCRA Subtitle C program. These state-level RCRA programs must, at a minimum, adhere to the federal program's standards, but they also have the flexibility to adopt more rigorous requirements if they choose [37].

Table 2. Hazardous waste characteristics defined by the U.S. EPA.

Characteristics	Definition and Key Criteria	Examples	Waste Code	Regulatory Reference
Ignitability	Easily ignitable wastes. Determined by flash point test, some solids (e.g., wood, paper) may qualify. Includes compressed gases and oxidizers.	Flammable liquids; wood; paper; oxidizers; compressed gases	D001	[139]
Corrosivity	Waste with pH $\leq$ 2.0 or $\geq$12.5, or that corrodes steel per EPA protocol.	Sulfuric acid from automotive batteries	D002	[95,140]
Reactivity	Waste that explodes, ignites, reacts violently with water, or releases toxic gases (e.g., cyanide/sulfide, pH 2–12.5).	Explosives; discarded munitions; reactive chemicals	D003	[95,141]
Toxicity	Determined by Toxicity Characteristic Leaching Procedure (TCLP), which simulates landfill leaching and tests for 39 chemicals. Exceeding thresholds classifies waste as toxic.	Leachate with heavy metals, solvents, pesticides	D004–D043 (depending on chemical)	[142,143]

6.3. Characterization of Recyclable and E-Waste

Around 23% of the MSW generated in the U.S. is recycled [48]. The U.S. EPA issued guidance to help state and local governments standardize the measurement of recycling, aiming to make data comparable across regions. Developed with input from the waste industry and government experts, the standards support coordinated waste system planning. Characterizing recyclable waste is important because it establishes the evidence base for designing effective recovery systems, policy interventions, and infrastructure investments [144]. Detailed composition data allow municipalities to quantify the recycling potential of disposed materials, identify priority streams such as paper, plastics, and food, and estimate greenhouse gas mitigation benefits of diversion [77]. Waste characterization also supports extended producer responsibility (EPR) legislation, provides critical inputs for life cycle assessments (LCAs), and techno-economic analyses (TEAs) of recycling path-

ways [91]. At the operational level, accurate composition profiles enable MRFs and local governments to anticipate contamination issues, optimize collection routes, and adapt to changing consumer packaging trends. Without such data, recycling system planning risks being based on assumptions that may not reflect local waste realities, leading to inefficiencies or underutilized infrastructure. Despite the wealth of recyclable waste characterization studies in the United States, several research gaps remain. First, there is a lack of standardization across studies, as varying material categories, sampling strategies, and reporting units hinder comparability between jurisdictions, even though EPA guidance exists to support uniform measurement [84]. Temporal resolution is also limited, with most studies conducted intermittently rather than continuously, thereby missing seasonal and year-to-year variations in waste composition influenced by consumer behavior or market disruptions. Additionally, certain waste streams, such as commercial and industrial recyclables, construction and demolition of debris, and emerging materials like textiles and compostables, remain underrepresented. Contamination and material quality metrics are often inadequately captured, reducing the utility of composition data for optimizing MRFs performance or selecting the recycling pathway.

E-waste generation in the U.S. reached 7.18 million tons in 2022, with only 30% of the waste being recycled and the rest being sent to landfills [145]. The characterization of the e-waste is largely lacking due to insufficient national reporting frameworks and municipal collection systems that apply different definitions and sampling methods, and because informal flows and undocumented exports confound mass balances [146]. E-waste is a highly complex waste stream composed of both hazardous and non-hazardous materials, primarily driven by printed circuit boards (PCBs). It typically consists of ~50% steel, 13% copper, aluminum and other metals, and 21% plastics, along with small but significant fractions of hazardous substances (~1%). Precious metals, though present in trace amounts (gold 0.1%, silver 0.2%, and palladium 0.005%), account for about 95% of the financial value supporting recycling operations [147]. It also contains heavy metals such as lead, chromium, cadmium, and mercury, and a lack of characterization data could pose a threat to environmental and human health [148]. To address data gaps, a material flow analysis framework was proposed that integrates primary survey data with secondary recycling, landfill, and trade datasets to estimate e-waste flows [149]. Their study estimated that of 40 million end-of-life units generated, ~30% were reused domestically, 6–29% exported, 17–21% landfilled, and 20–47% recycled, highlighting substantial uncertainty in end-of-life pathways. The variability reflects uncertainties in user behavior, but the framework demonstrates a scalable approach for quantifying e-waste flows across devices and countries. Despite EPA guidance and recovery programs, the absence of a unified federal EPR framework has resulted in fragmented state-level regulation and voluntary industry initiatives, limiting standardized tracking and financing mechanisms for end-of-life management [150]. Consequently, low recycling rates, inadequate compositional data, and decentralized governance continue to hinder effective circular-economy implementation and resource recovery in the U.S. e-waste sector.

7. Sorting of MSW for Enhanced Recycling

Waste management development is shaped by societal development; for example, in the U.S., the free market's tendency toward large landfills drives waste management policies. However, a movement towards high diversion from landfills is rising, which will require innovation for efficient sorting for recycling [26]. Appropriate sorting of the different fractions of MSW is critical, as improper disposal, such as landfilling or incineration without prior sorting, can lead to soil and groundwater contamination when waste is landfilled, and air pollution when incinerated [151]. Because of the potential impacts,

waste sorting is widely recognized as an effective method for reducing pollution and enhancing recycling efforts [152]. Sorting technologies for solid waste can be categorized into two main approaches, direct and indirect processes, each defined by the type of interactions between the particles and the corresponding force field of the separator [153]. Direct sorting techniques utilize the inherent properties of materials, applying an external field to facilitate separation [154]. On the contrary, indirect sorting techniques involve the extraction and identification of materials' characteristics, such as color, form, texture, and spectral features, using sensors and actuators [155]. With advances in machine learning and sensor technology, these techniques are becoming more relevant day by day for challenging waste fractions, as discussed in the following subsections. Figure 3 illustrates the sorting of a mixed recycling stream at a typical MRF in the U.S. to recover marketable materials. However, there exist considerable variations in MRF across the states in terms of technology adopted (automation or manual), infrastructure, market value of the product being recovered and regional recycling programs. In the U.S., single-stream MRF primarily processes a single stream of recyclable materials, ensuring these are separated from organic waste and other non-recyclable materials. Some MRFs process the source-separated materials and are referred to as "high-grade MRFs". These facilities further sort or refine recyclables to produce high-quality outputs. Source-separated materials are typically sorted at the point of disposal into distinct categories such as paper, metal, plastic or glass [74]. Mixed-waste MRFs process waste that combines recyclables with organic waste. These facilities separate recyclables, while organics are sent for composting or to refuse-derived fuel (RDF) facilities [26]. Contamination of inbound recyclables by organics poses a big challenge to MRFs and can damage the equipment. There exists an inbound contamination rate of 16% in the U.S., which can significantly hinder the recovery rate at MRFs [156].

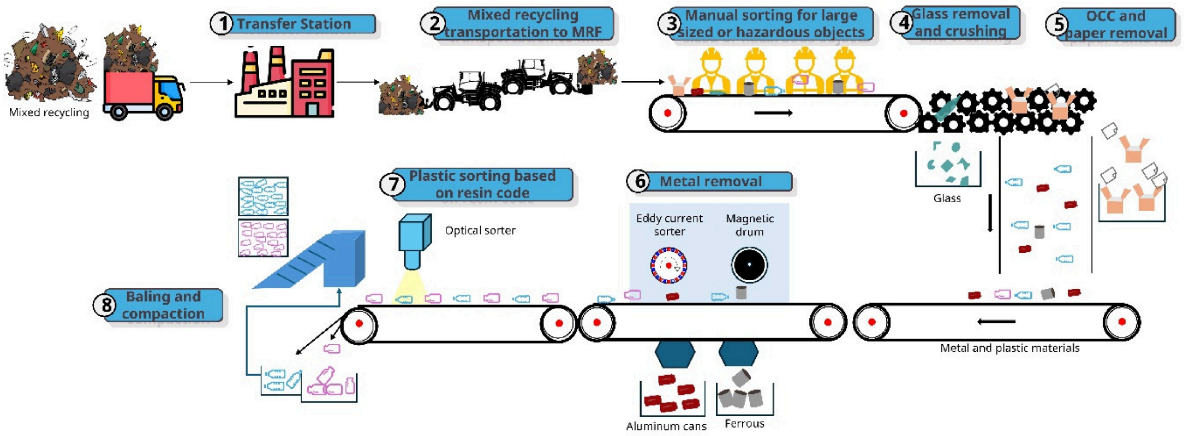


Figure 3. Material flow in a typical U.S. MRF, showing key sorting stages using mechanical, magnetic, optical, and manual methods to produce high-quality outputs.

Typically, at MRF, the process begins with the collection of mixed recycling streams from residential and commercial sources, either through curbside or drop-off programs. The collected materials are then transported to the MRF via transfer stations [26]. At the MRF, the mixed recycling stream undergoes an initial presorting stage, during which large objects, hazardous materials, plastic bags, and non-recyclable items that could potentially damage sorting equipment are removed through visual inspection. The clean stream is then transferred onto conveyor belts for further sorting through a series of mechanical, magnetic, optical, and manual processes designed to segregate materials based on properties such as color, size, and shape [11].

Magnetic separators extract ferrous metals such as steel and iron, while eddy current separators recover non-ferrous items, including aluminum cans. Optical sorters, equipped with near-infrared (NIR) sensors, identify and separate different types of plastics based on their resin codes [157]. Despite these advanced automation systems, manual sorting remains a critical component at various stages of the process to ensure the highest quality of the sorted output. Manual sorting following optical separation is essential for recovering materials that may not be effectively captured by automated systems. These materials include colored plastics (e.g., laundry detergent containers), polyethylene terephthalate (PET) soda bottles, and high-density polyethylene (HDPE) milk jugs. Finally, the sorted materials are compacted using baling machines and packaged separately for shipment to specialized processing facilities. This multi-faceted approach ensures the efficient recovery of high-quality recyclable materials, supporting the downstream recycling processes.

7.1. Direct Sorting Techniques

7.1.1. Magnetic Separation

Magnetic separation involves the use of Neodymium (NdFeB) magnets to separate ferrous and non-ferrous components of solid waste [154]. The ferromagnetic portions are attracted to the magnets, and the waste is sorted based on magnetic strength, such as strong, medium, weak or non-magnetic [158]. MRFs often use different configurations of magnets to recover ferrous materials from other recyclables [159]. Primary drum magnets separate ferrous metals from shredded output, while over-belt magnets capture residual ferrous material from non-ferrous streams on a conveyor belt. A magnetic ballistic separator provides a clean stream of ferrous products by using inertia to propel ferrous particles, which have significant non-ferrous attachment, beyond a splitter [160]. The addition of rare earth element (REE) magnets ensures the separation of even slightly magnetic austenitic stainless steel and offers a much stronger magnetic force of up to 25 times the pull of conventional ceramic magnets. REE-based magnetic separation is particularly useful for recovering low-magnetic, minute iron fragments that have limited response to standard ferrite magnets [160,161].

Different techniques based on magnetic fields are employed to separate metallic elements. Magnetic drums are cylindrical in shape and are utilized to separate ferrous metals from non-ferrous or mixed streams. This system consists of a magnetic drum having a permanent magnetic assembly within its half circumference. When a stream of waste is allowed to come in proximity to drums, the strong magnetic field attracts ferrous materials on the rotating drum surface. As a result, the ferrous materials move to the edge of the drum and collected in designated bins [11]. Additionally, magnetic head pulley systems, where the pulley is placed at the end of a conveyer belt with an integrated magnetic assembly, are another option for sorting. The magnetic overhead belt system consists of an overhead belt integrated with a magnetic assembly, placed perpendicular to the direction of the mixed stream of waste.

Similarly, magnetic density separation is used in recycling industries to segregate metallic and nonmetallic waste based on differences in their density and behavior towards a magnetic field. Magnetic fluid is used as a separation medium and is mixed with the waste stream. The segregation is achieved by varying the density of magnetic fluid, which results in the floating of recyclable materials with different densities at different levels [162]. A shredder combined with a magnet is used in MRFs for processing the mixed waste consisting of different grades of paper and ferrous metals (e.g., iron, steel). The shredder breaks down the large pieces of waste into smaller pieces, which are then passed through a magnetic field (magnetic drum or overhead magnet) to extract ferrous metals [163].

7.1.2. Air Separation

Air separation methods utilize the principle of inertia, where light material is carried horizontally or upward by an air medium, depending on the use of horizontal or vertical separators, while heavy material settles [158]. The efficiency of air separation depends on the factors such as wind speed, the shape of the cylinder, the inclination of the air flow, and granularity [158]. In a typical MRF, air separation is employed to remove lightweight materials, such as paper, plastic, foam, and rubber, which are collectively known as shredder residue. Suction is often used to remove these light materials, while compressed air is used to remove specific materials from the stream, especially to separate fines and other light materials from glass [159]. In vertical air separation systems, the airflow pushes lighter materials upward while heavier materials are collected at the bottom [164]. Cyclone separators are used effectively in recycling units, which operate by utilizing centrifugal forces created by a rapidly spinning air vortex. The centrifugal force pushes the heavier particles towards the outer wall, while lighter materials remain near the center [26].

7.1.3. Eddy Current Separation

Eddy current separation relies on Faraday's law of magnetic induction, which states that a voltage is generated in a material when magnetic flux density (B) changes with time (t), given by the equation:

$$-dB/dt = V/A \quad (1)$$

where B = magnetic flux density, V = voltage, and A = cross-section of enclosed area normal to the lines of magnetic flux.

The current produced by an induced voltage in an electrical conductor is called the "eddy current". In this technique, waste materials are passed over a drum that houses a high-speed assembly of permanent magnets, generating an alternating magnetic field. This causes the metallic waste to be separated from the non-metallics where the ferrous metals are attracted to the drum and brushed off, the non-ferrous metals are thrown clear of the drum, and the non-metallics are drawn away from the drum by gravity [157].

7.1.4. Sink/Float Separation

The sink/float separation technique is particularly effective for separating plastic materials. Polyolefins, which have densities under 1000 kg/m^3, are easily separated from other plastic types, such as PET, PVC, polystyrene (PS), and others [165]. Nonetheless, PVC and PET have a similar density range, complicating the implementation of this method. In such cases, methods like X-ray fluorescence detection are employed which involves irradiating plastic materials with X-rays to detect secondary radiation emitted by chlorine atoms in PVC. A multi-step process involving fluids of varying specific gravities can effectively separate different waste fractions. A density-based sink–float separation approach was used to separate virgin and post-consumer plastics from municipal solid waste using water, ethanol, and NaCl solutions as separation media. The study reported overall recovery rates ranging from 70% to 99.7%, while recovery of individual plastic fractions from post-consumer plastic waste ranged from 8% to 37% [166].

A three-stage sink float separation to separate six type of plastic HDPE, polypropylene (PP), PVC, PS, PET and acrylonitrile–butadiene–styrene copolymers (ABS) have also been implemented by a group of researchers [167]. Another study introduced a computational fluid dynamics (CFD) model to optimize dense medium drum (DMD) separators by providing insight into the physics of flow dynamics inside the separator which predicted polymer separation behavior with less than 7% error [168]. These studies show the continuous development of the sink float method towards increasing efficiency, which will impact the recycling of plastic waste.

7.2. Indirect Sorting Techniques

7.2.1. Laser Induced Breakdown Spectroscopy (LIBS)

This spectrum-based measurement technique utilizes an intensive laser pulse to create high-temperature plasma, which emits light in the cooling phase. The emitted light from this plasma is collected by a charge-coupled device and analyzed by a spectrometer to determine the elemental composition of a material. A typical LIBS system includes a laser, spectrometer, and optics positioned above a conveyor belt. By analyzing the relative intensity of spectral lines, LIBS can effectively classify materials such as plastic waste (PET, PP, PS, HDPE, low-density polyethylene (LDPE), PVC), metals and glasses [11,169]. Huber et al. identified PVC waste in an industrial materials sorting plant using LIBS, as PVC is generally sorted out in energy recovery applications of mixed plastic waste due to the possible formation of hydrochloric acid [170]. In another study, classification of PET, PVC and PS was performed using a simple LIBS setup, utilizing spectral lines or molecular bands. The signal ratios from elemental lines of different polymers were analyzed, with the most important ratio corresponding to H/C_1 and C_2/C_1 [171]. The importance of combining LIBS with algorithms such as Artificial Neural Network (ANNs) and Principal Component Analysis (PCA), especially in plastic classification, has significantly enhanced the accuracy as compared to traditional methods. K-Nearest Neighbor (kNN) is one of the most significant methods for high-precision plastic classification using simplified arithmetic [172]. The LIBS system has been used for past sorting applications by performing high-resolution mapping of geological samples with a repetition rate of 1 kHz and spatial resolution of 50 μm [173].

One such integration of PCA and kNN with LIBS was used to classify plastics (acrylonitrile, polyamide, polycarbonate, polyethylene and polymethyl) with 99.6% accuracy. PCA reduced spectral data dimensionality, reducing training time to 168 s and classification time to less than 0.02 s per sample [172]. Although LIBS has shown promising results, a similar composition of most polymers (HDPE/LDPE and PS/polycarbonate) leads to the generation of similar LIBS spectra, which makes the classification process difficult. This problem was overcome by applying spectral descriptors and kNN method, which extracted only the relevant chemical information from the polymer spectra of 20 virgin polymers [174].

Further, combining LIBS with Raman or IR spectroscopy could help in addressing this problem. In addition, it is important to note that the absence of an open-source LIBS database, limited sample size using spectra from the same polymer type, and limited information about the potential of LIBS for assessing metal contaminants are some of the areas that remain underexplored.

7.2.2. X-Ray-Based Sorting

X-ray-based sorting technologies utilize X-rays to penetrate materials, resulting in absorption and transmittance through the detector, which produces object-specific X-ray spectra [175]. This technique is categorized into two main categories—dual energy X-ray transmission (DE-XRT) and X-ray fluorescence (XRF), as shown in Figure 4. DE-XRT is primarily used for recovering metals from recyclable streams, where the dual emission X-ray (two X-rays with different wavelengths) is applied on the material and the higher density metals are separated from lower density metals based on X-ray attenuation. This technique is especially effective for sorting materials with different atomic numbers [176].

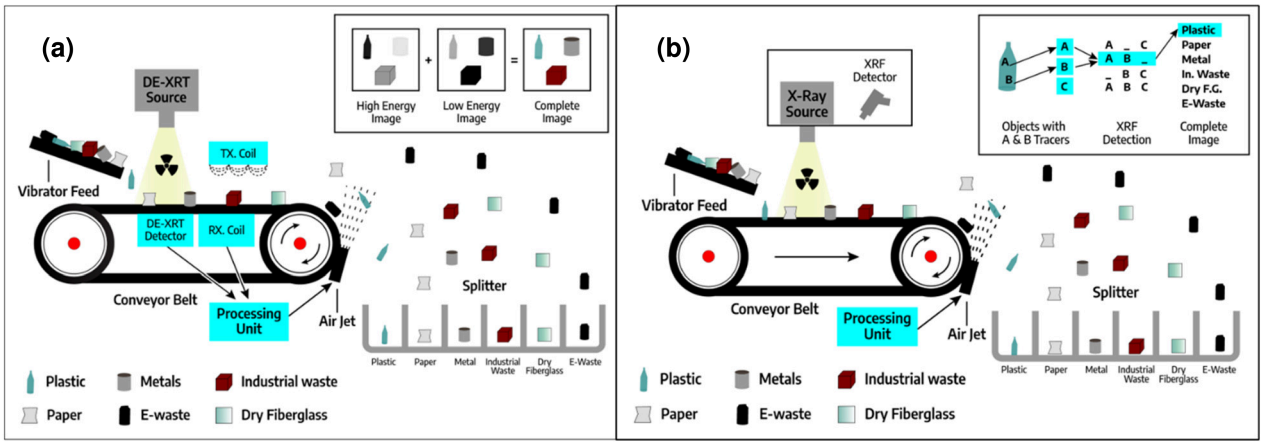


Figure 4. (**a**) DE-XRT and (**b**) XRF techniques for sorting materials based on composition and density used in waste management and recycling facilities, Adapted from [11].

XRF is a non-destructive technique that is ideal for the recovery of different grades of plastics (mainly PVC, PET, PP), metals (stainless steel or aluminum) and contaminants (arsenic, copper) in heavily soiled waste [177]. The incident X-rays excite the individual atoms present within the object and emit secondary (fluorescent) X-rays, which contain the characteristic features of the element present. One of the striking features of the XRF technique is its integration into big recycling facilities to refine separation. It can penetrate up to 1 mm within the object and analyze black polymers and surface contaminated fractions in milliseconds [178]. Bezati et al. showed that XRF with a tracer system can be a solution for the high-speed sorting of black plastics into different categories [179]. XRF has been applied previously to separate out PVC from PET, which can be difficult due to the similarity in their density. Removal of PVC from the waste stream containing PET avoids the formation of chlorinated compounds upon reprocessing of the PET recyclates [180]. XRF has the unique advantage of detecting tracers even in a black polymer matrix, but the number of tracers is limited by the periodic table. To improve the accuracy of polypropylene sorting, Energy Dispersive X-ray fluorescence (EDXRF) has been proposed, which can also recognize black polymer and surface contamination [181].

The comparative review of state-of-the-art sensor-based sorting technologies highlights their potential to complement and improve conventional mechanical and density-based separation systems in MRFs. Among the technologies discussed, LIBS offers rapid elemental analysis and strong potential for accurate plastic identification, although its practical implementation depends on robust calibration and integration with chemometric or machine-learning models across different waste compositions and facility configurations. X-ray-based techniques provide complementary advantages: DE-XRT is useful for separating materials according to density and atomic-number-related attenuation, while XRF enables rapid elemental identification of metals, PVC-containing plastics, black polymers with tracers, and surface-contaminated fractions. Integrating these sensor-based technologies with conventional sorting systems can improve the efficiency, selectivity, and adaptability of MRFs for managing highly heterogeneous MSW streams.

8. Preprocessing of MSW

Following collection, MSW is directed into several management pathways such as landfilling, recycling, waste-to-energy, composting, or other thermo-chemical and biological conversions. Preprocessing denotes the unit operations performed between collection and post-processing to meet the requirements of the chosen pathway. As discussed in Section 4, MSW destined for landfilling is gathered from municipal, commercial, and institutional

sources, transported to the landfill, tipped at the working face, and then spread and compacted within designated cells using landfill compactors or bulldozers [182].

MSW presents greater feedstock challenges than other biomass, primarily due to its heterogeneity, variable elemental composition, and high moisture content (often exceeding 75%) [25]. The high moisture content of MSW is another challenge and is responsible for high energy input in drying, which creates techno-economic hurdles. The waste composition and generation rates vary significantly across income groups [183]. For instance, high-income countries produce more dry waste such as paper, cardboard, metal, plastic etc., which are relatively easy to recycle. Conversely, over 50% of MSW generated in low-income countries consists of organic fractions, which pose significant management challenges [184]. To address these challenges, pretreatment processes are implemented to reduce feedstock variability and improve conversion efficiency.

Pre-processing often begins at the source separation stage. For instance, achieving a homogeneous particle size during incineration and maintaining a consistent feed to the combustion chamber are primary objectives for ensuring a steady fuel output from MSW feedstock. Figure 5 illustrates the various preprocessing methods employed to prepare MSW feedstock for valorization. Removing non-combustible materials like construction debris, leather, metals, glass, and low calorific value waste, such as food waste, enhances fuel efficiency. Consequently, various techniques are employed based on the facilities to separate noncombustible and lower calorific value materials [185].

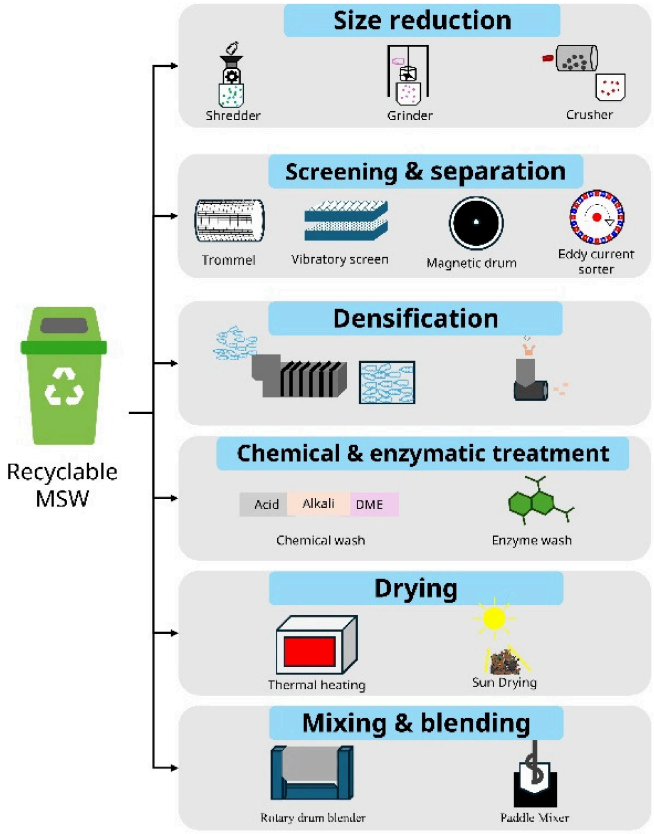


Figure 5. Preprocessing methods for obtaining conversion-ready feedstock, including size reduction, screening and separation, densification, chemical and enzymatic treatment, drying, and mixing.

The choice of preprocessing techniques depends on the specific waste management approach. Preprocessing methods serve to homogenize materials, eliminate moisture, consolidate waste, remove contaminants, and reduce particle size, among other functions [185]. Preprocessing may involve sorting unwanted materials, extracting metallic and

non-metallic components, separating organic fractions, and employing mechanical and biological treatments [186].

Various pretreatment methods have been studied extensively for MSW valorization, particularly for anaerobic digestion, where mechanical, thermal, and pelletization methods have been widely studied. Mechanical pretreatment reduces particle size and increases surface area, thereby improving substrate accessibility. Thermal pretreatment, one of the most widely used pretreatment methods for industries, is effective in removing pathogens. However, selection of the temperature is important as higher temperatures can lead to particle agglomeration or the formation of melanoidins, which may hinder downstream processes [187]. Further innovations to improve economic viability include utilizing systems that operate at low heat and oxygen levels to produce RDF, co-digesting multiple feedstocks to improve biogas yields, genetic engineering and system biology to modify the microbes for higher biomass conversion rates, and co-processing MSW-derived biocrude with petroleum crude fraction [188,189].

8.1. Mechanical Preprocessing

Waste compaction is a key mechanical preprocessing technique used to remove unwanted materials from MSW. This process uses high pressure to reduce waste volume with the overall goal of increasing treatment efficiency and reducing GHG emissions. Compaction is typically carried out at transfer stations, in collection containers, in transportation trucks and at landfill sites. Initial compactions occur in waste collection trucks, enabling the transportation of larger waste quantities. Furthermore, compaction offers several advantages, including moisture removal, cost efficiency, increased landfill capacity, improved waste stability and reduced production of leachate [190].

However, the effectiveness of compaction depends on the composition of MSW, the thickness of waste layers, and the type of equipment used for compaction, all of which influence the unit weight of compacted waste [191]. For waste incineration, sorting is not typically performed. Instead, a pre-processing step known as "fluffing" is used. It involves loosening the waste into smaller and uniform particles to increase surface area. This improvement enhances air circulation during combustion, leading to more efficient and complete burning while reducing GHG emissions [192]. Due to the heterogeneity of MSW, size reduction is a critical preprocessing step for its effective valorization. Reducing particle size not only enhances homogeneity but also increases the surface area for reaction, which facilitates improved reaction and better yield. For example, organic cotton with an average diameter of 25 μm after milling showed a fivefold increase in reaction rate and yield during enzymatic hydrolysis [193]. Similarly, methane generation during anaerobic digestion improved by 25% when the particle size was reduced to 0.5 cm. However, particle sizes below 0.5 cm can cause clogging, mixing, and foaming issues. During pyrolysis, smaller particle sizes are preferred as they increase the syngas yield [194]. Smaller particle size and compaction reduce the water permeability of the waste, resulting in less generation of leachate and ensuring minimal contamination of groundwater [195].

Considering the importance of the size reduction of MSW, several mechanical preprocessing techniques are used. Shredding is commonly used with low- to high-torque shredders using blades that cut materials against a fixed wall as they pass through the unit [196]. Shredded MSW can subsequently be used for incineration or landfilling. Size reduction through shredding not only increases the surface area but also enhances compaction and bulk density of the material. As a result, it reduces the space required in landfills and ensures efficient combustion in incineration facilities. Additional mechanical systems include screw conveyors, which transport the materials, while rotating shafts on opposite axes assist in shredding. Ball mills are also used, where heavy balls within a rotary

drum break down materials into small fragments [197]. Another mechanical pre-processing method involves the use of trommels for size-based separation of MSW, in which the feedstock passes through a rotary cylindrical drum with varying size openings along the cylinder wall, facilitating sorting based on size. Soft materials are separated, while rigid and larger materials are discharged, enabling size-based preprocessing [185]. While combining with a rotary drum, trommels are particularly effective for anaerobic digestion. Rotary drum aids in reducing waste particle size and separating the organic fraction of the waste, resulting in a large surface area for microbial activity [198]. This combination resulted in enhanced methane production by 18–36% [199].

8.2. Thermal Preprocessing

Thermal preprocessing applied after MSW collection includes low-temperature drying (about 60–120 °C) to reduce moisture and stabilize fuel, pasteurization to meet sanitation when routing the organic fraction to anaerobic digestion (e.g., 70 °C for ≥1 h or equivalent regimes), pressurized steam autoclaving (120–170 °C) that sterilizes mixed MSW and fiberizes paper to improve downstream separation, thermal hydrolysis (140–170 °C, short residence) that solubilizes organics, lowers viscosity, and can improve dewaterability and methane yields, hydrothermal and steam-based treatments (e.g., liquid hot water or steam-explosion) that open lignocellulosic structure and accelerate hydrolysis, hydrothermal carbonization (180–250 °C, wet/pressurized) that converts organic fraction into a pumpable slurry and energy-dense hydrochar and torrefaction (200–300 °C, low oxygen) that yields a more hydrophobic, grindable RDF with higher energy density [200]. In practice, composting lines prioritize sterilization or thermal hydrolysis for improved digestibility. Steam explosion is a common lignocellulosic biomass pretreatment method used during bioethanol production, and it is performed at 200–260 °C for 5–10 min under rapid decompression with the purpose of lignin activation by using high-pressure steam of 1–3 MPa [201]. However, it has also been used to produce solid fuel pellets during the steam explosion, which causes plant cell walls to explode, exposing cellulose fibers and depolymerized lignin to be more accessible for densification [202].

8.3. Pelletizing

Pelletizing is performed by first removing the non-combustible fraction of the waste, and then the combustible materials are densified under pressure. Pelletization is performed after sorting and size reduction steps, producing RDF. These pellets can be used as a feedstock for combustion or for char production. This preprocessing technique aims to increase the bulk density of materials. Although higher moisture content is required for effective compaction, the heat and shear generated during densification can remove up to 30% moisture in a single pass [203]. Cardboard and paper pellets exhibit better bulk density results as compared to other feedstocks [204]. For RDF production, pre-processing steps are required to address the heterogeneity of MSW, particularly for application in cement industries [205]. This includes source separation, sorting, grinding and shredding, followed by steps such as screening, shredding, size reduction, classification/separation, drying, and densification [25]. Pelletizing converts the combustible fraction of MSW into densified cylinders after removal of noncombustible materials, and it typically follows sorting and size reduction.

8.4. Washing and Decontamination

Contamination poses a significant challenge to the valorization of MSW into bioenergy and biofuels. Plastic and paper are commonly contaminated with dirt, food waste, ink, labels, adhesives, nails, and other foreign materials [206]. Contamination has a detrimental impact on the quality of recycled products. Therefore, removing the contaminants is critical

for a clean stream of feedstock. Washing is a key treatment method for decontamination, particularly important for plastic. Pre-washing is performed to remove heavily contaminated materials that could be detrimental to the equipment. Following pre-washing, either wet or dry washing techniques are applied.

Wet washing involves the use of detergent or chemical solutions, such as NaOH, to remove food particles, stickies, and glues using either hot or cold water. Dry washing relies on friction between the particles to separate dirt and contamination, with the clean particles retained on the screen [207]. For the paper fraction of MSW, various methods such as pulping, cleaning, screening, and enzymatic washing are employed to obtain a cleaner, recyclable paper stream. Cleaning and screening are performed to remove nails, paper clips, and rocks by using centrifugal cleaners for the weight separation of the contaminants [206]. Deinking is used to remove ink from paper, employing various surfactants, with ultrasound and floating techniques being particularly effective to remove toner ink [25].

9. Utilization of MSW for Bioenergy and Value-Added Products

The composition and properties of MSW exhibit substantial variation due to climate, local policies, economic status, lifestyle, seasonality, and so on [208–210]. This variability poses a significant challenge in the research and development of conversion processes for value-added products. These processes may be selected based on the quantity of generated waste, such as paper, food, textiles, plastic, metal, glass, wood waste and others [25]. Furthermore, the selection could also be influenced by local market conditions for the derived products, land availability, community acceptance, life cycle impacts and techno-economic feasibility. Due to these variations related to composition and properties, the existing research technologies for other solid fuels cannot be directly applied towards MSW conversion without implementing substantial modifications [19]. Therefore, it is important to understand specific aspects such as sorting, preprocessing, technology selection, and challenges associated with the heterogeneous nature of MSW, as discussed in subsequent sections.

The conversion of different MSW fractions into bio-based products has emerged as a promising alternative to conventional disposal and low-value recovery routes. This shift is supported by advances in pyrolysis, plasma gasification, and co-hydrothermal carbonization for upcycling [211], robotics- and machine learning-based systems for automated sorting [16], synthetic biology and advanced enzymatic cocktails [212], and an AI-enabled smart waste management system [213]. At present, biofuels are being recognized as sustainable power sources, offering potential solutions for resolving the worries emerging from energy security and mitigating climate change [16].

The selection of the most suitable technology for utilizing MSW depends on waste generation patterns and their physical, chemical, and biological properties. Substantial research has been undertaken around the globe on harnessing MSW to produce energy in the form of heat, power, liquid and gaseous biofuels, bioproducts and other renewable carbon resources [13,211]. The strategies for converting MSW into various value-added products are summarized into four routes: biochemical, thermochemical, physicochemical and cutting-edge technologies, as shown in Figure 6.

Figure 7 highlights the major bioproducts formed along with associated treatment methods using different types of MSW. Food waste is mainly utilized through anaerobic digestion and fermentation processes for biofuel production, whereas paper waste serves as a cellulose-rich feedstock for enzymatic conversion. In contrast, plastic waste such as polyethylene terephthalate (PET) requires depolymerization and microbial upgrading routes for the production of high-value chemicals.

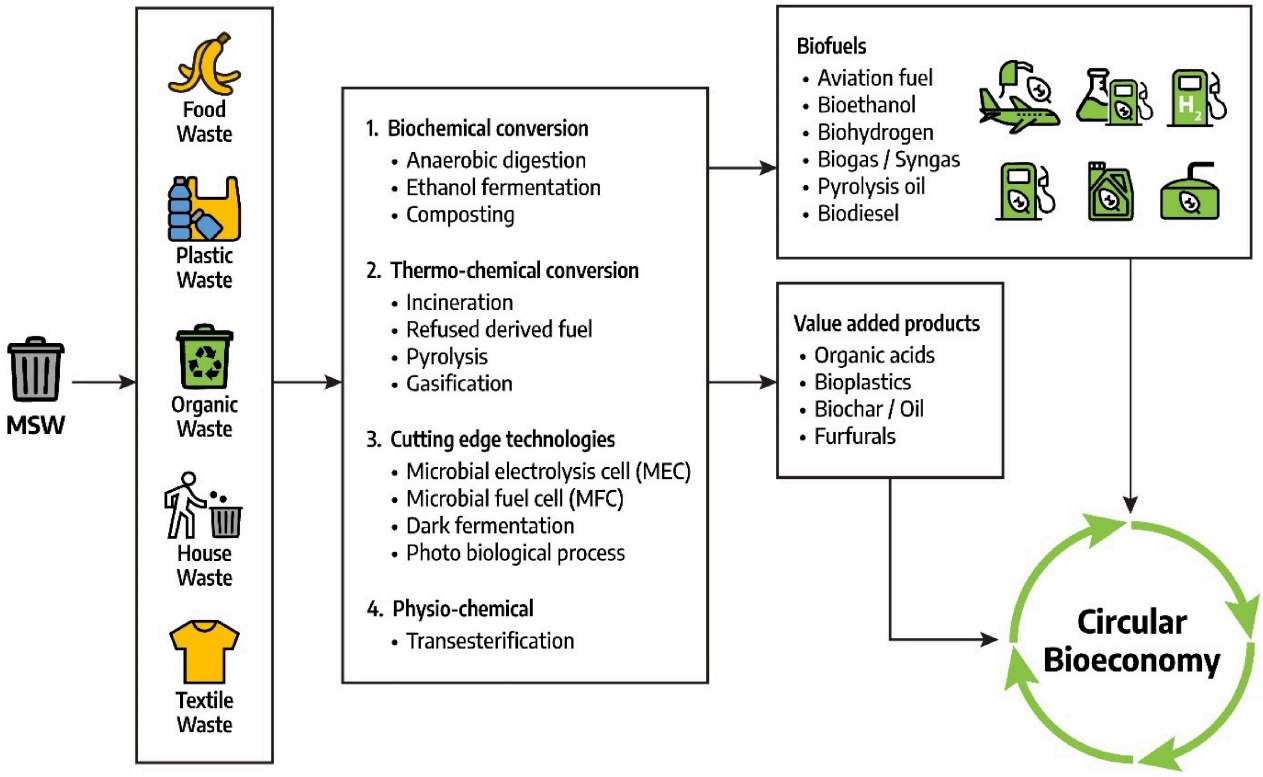


Figure 6. MSW to bioenergy and biopower technologies for the valorization of MSW towards circular bioeconomy.

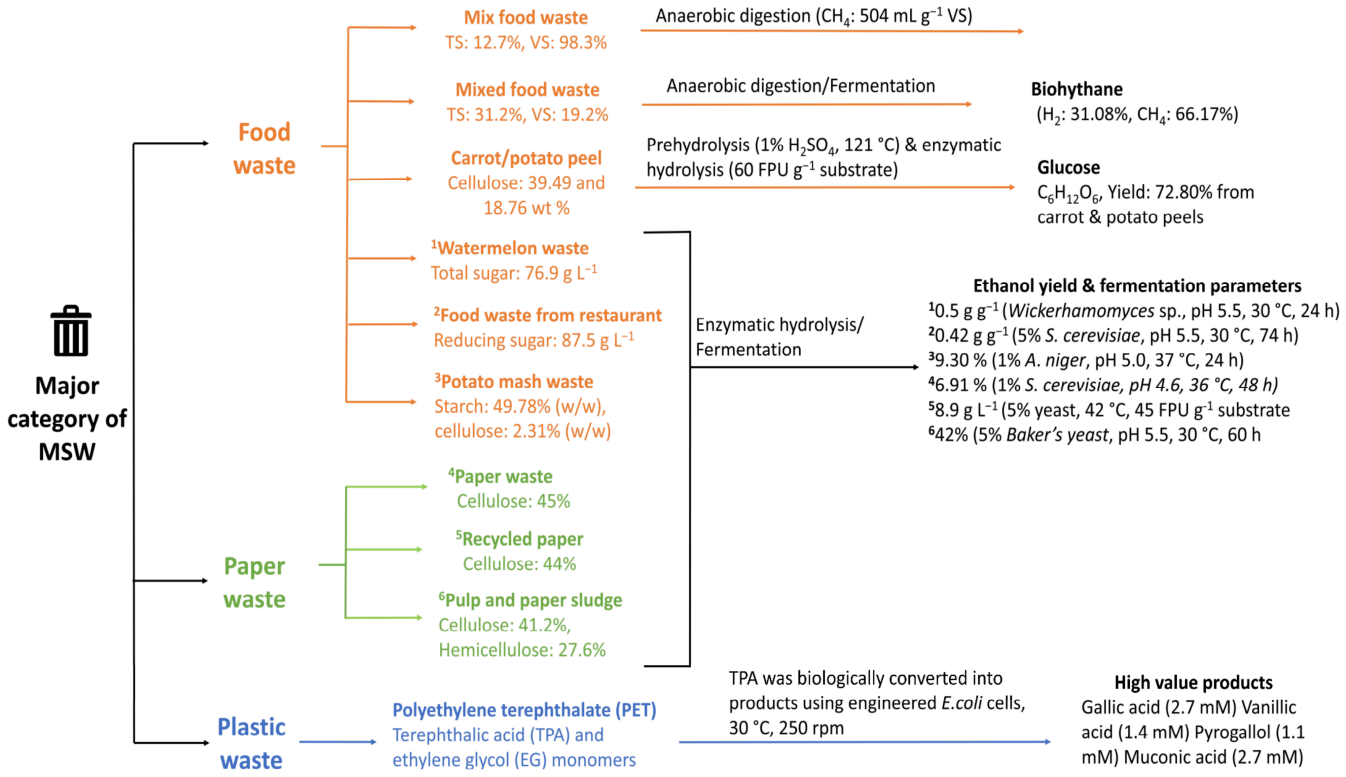


Figure 7. Conversion of different fractions of MSW into various bioproducts mainly through anaerobic digestion and fermentation, illustrating the potential of diverting MSW into sustainable bioproducts such as methane, biohydrogen, ethanol and other value-added products [214–217].

Biochemical pathways include the microbial breakdown of moisture-containing biomass having higher biodegradable content for obtaining energy-dense fuels. During anaerobic digestion, the organic fraction of MSW, including kitchen waste, wastepaper, and wood, is digested in an anaerobic digester to produce raw biogas. The impurities present in raw biogas, which include carbon dioxide (CO_2), ammonia (NH_3) and hydrogen sulfide (H_2S), are subsequently removed using techniques such as pressure swing adsorption for CO_2, acid or amine scrubbing for NH_3, and chemical scrubbing to remove H_2S [218]. The compressed and purified form of biogas is used for electricity generation. On the other hand, thermochemical routes (e.g., refuse-derived fuel, gasification, pyrolysis, incineration/combustion) are more useful for the conversion of moisture-free biomass having substantial non-biodegradable organic fractions [212]. Thermochemical processes convert the biomass mainly into solid (biochar), liquid (bio-oil), gaseous (syngas), heat and fuel through high temperature (range 300–1700 °C) and high-pressure reactions [219]. The operating conditions of thermochemical processes make them a versatile option to utilize organic biomass having high lignin content, which cannot be degraded using biochemical routes. One of the key end products of these processes are syngas, a mixture of carbon monoxide, hydrogen, and methane, produced by gasification, pyrolysis, and incineration of MSW fractions [220]. Syngas is used in turbines, fuel cells or boilers for electricity generation and heating applications. During gasification, carbon-containing waste is heated within a temperature range of 500–900 °C in an oxygen-rich environment to produce syngas. Pyrolysis occurs at temperatures ranging from 300–1000 °C in oxygen-free conditions, yielding char, syngas and bio-oil [221].

The high temperature facilitates critical reactions such as volatile cracking (to obtain simple gaseous products), decarboxylation (removing CO_2 from organic molecules) and dehydration (eliminating water molecules) to form more stable and energy-rich products [28]. The physico-chemical routes include physical, chemical and transesterification processes for the conversion of solid waste, which are difficult to manage, such as vegetable oils, fats and greases into biodiesel or liquid fuels [222]. Vegetable oils can be treated and valorized with the electro-demulsification method, where an electric current (typically ranging from 0.5–1.5 V cm^{-1}) is applied to separate the suspension into two products: hydrocarbon liquid and concentrated sludge containing oils. The liquid stream of hydrocarbons is used in a refinery as high-quality fuel and sludge is considered a low-quality fuel with its potential use for chemical synthesis [223].

Cutting-edge technologies comprise fermentation pathways such as dark fermentation, photo fermentation and combined fermentation methods, as well as bio-electrochemical processes, including microbial fuel cell (MFC) and microbial electrolysis cell (MEC) [224]. These processes focus on converting organic fractions of MSW into biohydrogen, electricity and bioproducts [225]. Photo fermentation is mainly dependent on purple non-sulfur bacteria including *Rhodobacter* sp., *Rhodopseudomonas* sp., and *Rhodospirillum* sp. and has the additional advantage of high biowaste conversion yield and biohydrogen yield compared to dark fermentation [226]. Recently, a new concept has been introduced where thermochemical processes are combined with biological processes to enhance bioenergy recovery along with economic benefits. For instance, combining pyrolysis of raw food waste and its digestate obtained from an anaerobic digester located at a commercial facility improved biogas and bio-oil yield by 7.4 wt% and 60.3 wt%, respectively [227]. In another experiment, hydrothermal liquefaction was integrated with anaerobic digestion with the idea of recovering the residual carbon from anaerobic digestate, resulting in biogas yield from 3.9–22.6 m^3 kg^{-1} and bio-crude yield of 20–42 wt%, with a high heating value of 28.4–31.2 MJ kg^{-1} [228].

9.1. Thermochemical Properties of MSW Fractions

Thermochemical utilization of MSW depends on fraction-specific heating values, moisture and ash content, and elemental composition, which collectively determines conversion efficiency, emissions, and operational stability. The lower heating value (LHV) of MSW depends strongly on composition and can be interpreted using proximate and ultimate analyses. Moisture and ash lower LHV, while high volatile matter promotes ignition, benefiting pyrolysis and gasification [187]. Food waste, with high moisture content, reduces the overall LHV of MSW, which in turn impacts the efficiency of energy recovery processes [229]. Plastics (excluding PVC and PET) are strong thermochemical feedstocks due to high volatile matter; PVC and PET exhibit ~5% and ~10% fixed carbon, respectively [230]. Carbon content varies by polymer: PE/PP/PS are ~85% C, whereas PVC and PET are ~35–40% and ~60–65% due to higher Cl and O content [230]. Accordingly, plastics (except PVC) can exhibit very high LHVs, e.g., 43,910 kJ kg^{-1} for PP [187,231].

The 2019 Waste-to-Energy report on MSW highlights key challenges in utilizing MSW for conversion processes: (i) the need for high energy expenditure on drying as >75% water is present in significant fractions of MSW, (ii) concentration of nitrogen and sulfur in food and yard waste, which may be up to 20× higher than those found in other lignocellulosic feedstocks, and (iii) dioxin formation during combustion of inorganic waste [232].

On the other hand, ash plays a critical role in thermochemical conversion processes, influencing reaction pathways. Biomass typically comprises oxides, carbonates, sulfates, chlorides, and silicates of inorganic elements [233]. Alkali metals are often present in water-soluble or ion-exchangeable forms, while alkaline earth metals tend to be more structurally bound to the biomass matrix. So, heavy metals are usually present in trace concentrations but can exhibit high mobility under thermochemical conditions [234]. In case of gasification, alkali metals, especially potassium and sodium, exhibit strong catalytic activity in biomass gasification process. Potassium is particularly effective in lowering energy activation and increasing reaction rates, resulting in higher carbon conversion and increased syngas yields [235]. However, excessive content can cause operational challenges. Chloride-associated alkalis (e.g., KCl, NaCl) are especially problematic due to their volatility and corrosive behavior. In the pyrolysis process, the main impact is created by reducing bio-oil yield, and increased gas and char formation [236]. If potassium is present, it promotes dehydration, decarboxylation, and cracking reactions, decreasing stability. So, feedstock with high alkali content requires pretreatment (e.g., washing or acid leaching) to improve liquid fuel yield [237]. In the case of SAF production pathways, syngas upgrading or bio-oil hydrotreatment, alkali metals are detrimental to catalysts; in particular, the ash can neutralize acidic catalyst sites and cause irreversible catalyst deactivation [238]. Therefore, controlling alkali metal content is essential for maintaining high conversion efficiency and meeting fuel quality specification. The main impact will be accelerating catalyst sintering and deactivation, increasing metal contamination in intermediate products [239]. Stringent feedstock characterization and ash management strategies are therefore required to ensure process reliability and regulatory compliance. These constraints emphasize the importance of fraction specific handling, and advanced characterization strategies to enable efficient thermochemical utilization of heterogeneous MSW streams.

9.2. Waste to Sustainable Aviation Fuel (SAF)

MSW-to-SAF pathways offer significant decarbonization potential but remain constrained by feedstock heterogeneity, syngas cleanliness requirements, and absence of fully integrated LCA/TEA. SAF is expected to play a central role in decarbonizing aviation by 2050, and MSW is increasingly evaluated as a feedstock. However, variability in financial,

operational, and policy contexts complicates comparison across pathways, leaving gaps in understanding technical, environmental, and TEA outcomes. ASTM has approved multiple SAF pathways, including hydro-processed esters and fatty acids (HEFA), Fischer–Tropsch synthetic paraffinic kerosene (FT-SPK), alcohol-to-jet (ATJ), sugar-to-iso-paraffins (SIP) and catalytic hydrothermolysis jet (CHJ) [240]. Among these, FT-SPK is the most deployed pathway for MSW-derived SAF, while others remain in development. Scale-up priorities include feedstock conditioning for gasification compatibility and integrated LCA/TEA frameworks [241].

Recent initiatives include the following: (i) Southern Research's JP-8 production via SPK-A with autothermal reforming and hybrid FT integration [242]; (ii) Fulcrum Bioenergy's MSW gasification + FT facility in Gary, Indiana, processing ~70,000 tons yr^{-1} to produce ~33 million gallons of aviation fuel with >80% GHG reductions and certification under Renewable Fuel Standard (RFS) and Low Carbon Fuel Standard (LCFS) [243]; and (iii) the Altalto Immingham project, targeting >50,000 tonnes of residential and commercial MSW for SAF, with claimed 70% GHG reductions [244,245]. Nevertheless, MSW-to-SAF remains constrained by feedstock heterogeneity and the need for clean syngas for FT, and current pathways generally lack evidence of carbon negativity at full system scale.

A central approach for SAF production is gasification and FT synthesis, where MSW is pretreated and gasified into synthesis gas (CO and H_2), and then catalytically converted into liquid hydrocarbons that are upgraded into SAF [240,246]. This process looks straightforward, yet each stage has significant challenges. MSW as a feedstock is not just chemically variable; it is also spatially and temporally inconsistent [247]. The supply chain must coordinate collection, sorting, preprocessing, and transportation. In addition, ash and trace metals represent some of the most recalcitrant components in MSW, posing significant technical challenges for downstream conversion processes [248].

In MSW gasification–FT systems, inorganic ash and trace elements including alkali metals, chlorine and heavy metals are carried into the gasifier. These impurities deposit on catalyst surfaces, blocking active sites, promoting sintering, and accelerating deactivation, thereby reducing catalyst activity and lifetime [249]. Removing these species from syngas is technically necessary and involves major steps such as scrubbing, filtering, and chemical cleanup. All of these will reduce energy but add capital and operating costs [250]. Ash also contains toxic substances that can form corrosive compounds under high temperatures [251]. Even with effective syngas purification, only a fraction of the input carbon is converted into liquid fuels, with the remainder lost as CO_2, CO, or light gases unless additional measures such as CO_2 recycling or external hydrogen integration are employed [252].

Scaling up SAF production requires collaboration among feedstock suppliers, fuel producers, airlines, and policymakers to share knowledge, invest in research and build partnerships that address technical, financial, and logistical barriers [253]. Diversifying feedstocks reduces competition with food and environmental impacts, while advances in catalysts, process optimization, gasification, pyrolysis, and bioconversion improve conversion efficiency and lower production costs [254]. Another option to reduce the capital cost is incorporating renewable energy sources which can help reduce carbon footprint of SAF production. Emerging AI-enabled material recovery facilities (AI-MRF) equipped with smart conveyor systems offers a promising pathway to reduce feedstock heterogeneity by enabling precise, real-time classification and separation of MSW streams, to improve economic viability [27,255].

9.3. Waste to Syngas

Syngas quality from MSW gasification and plasma conversion is highly sensitive to moisture, ash, and contaminants, requiring robust feed conditioning and gas-cleaning strategies to enable reliable downstream use. Syngas production from MSW varies substantially with feedstock composition, moisture content, gasification agent, and operating conditions [220]. Plasma gasification (630–850 °C) has produced syngas with LHV of 6.79 MJ m^{-3} [256]. Increased moisture can raise H_2 while lowering CO via the water–gas shift reaction [257]. In steam gasification, Hu et al. reported H_2 yields up to 277.67 mL g^{-1} for MSW moisture content of 10 to 60%, with improved performance at Ca/C = 0.7 and moisture ~40% [258]. Persistent barriers include equipment fouling from ash/heavy metals and formation of styrene, tar (e.g., toluene, naphthalene, phenol, and biphenyl), and corrosive gases (H_2S, COS), which require improved gas cleaning and process integration [220].

The recent literature emphasizes that syngas quality from MSW is not determined by the reactor alone, but is a system level outcome governed by feedstock variability, operating severity, and the design of gas-cleaning trains. Together, these factors determine whether tar formation, acid–gas corrosion, or catalyst deactivation becomes the limiting factor [259,260]. In this context, variability in MSW and RDF, especially in moisture content and chlorine- and sulfur-containing components, can lead to unstable operating conditions that complicate scale-up and reduce long-term reliability. As a result, feed specification and preprocessing become key design considerations, on par with reactor temperature and gasifying agent selection [260]. Among downstream constraints, tar remains the most persistent bottleneck for syngas utilization. Recent studies show that deep tar reduction cannot be achieved through reactor tuning alone and instead requires multistage gas cleaning systems. These typically involve particulate removal, catalytic cracking or reforming, and acid–gas scrubbing [259]. Another approach such as plasma-assisted conversion has been explored as complementary strategies for tar reduction. The high temperatures can effectively break down heavy hydrocarbons while simultaneously converting inorganic residues into inert slag. Nevertheless, the deployment of this pathway is influenced by their electricity driven energy demand and associated costs. This has motivated the development of two-stage or hybrid configurations in which plasma is used as a secondary conditioning step, targeting residual tars and refractory species in the product gas rather than serving as the primary conversion route [261]. In addition, experimental and modeling efforts aimed at tailoring MSW derived syngas toward specific targets, such as hydrogen-rich compositions under steam gasification, show that steam gasification and catalytic strategies can substantially alter syngas composition and improve reactor level performance. However, these improvements alone are insufficient to produce deployable syngas without effective control of tar and heteroatom derived impurities through integrated gas cleaning systems [262]. Consistent with broader syntheses of MSW gasification studies, limitations related to tar formation, gas cleaning requirements, and operational stability are more frequently identified as barriers to scale-up and end-use compatibility [263]. Experimental demonstrations further underscore that deployable waste-to-syngas systems must address contaminant management as rigorously as gas yield. This has driven the integration of catalytic and wet-cleaning trains to ensure downstream compatibility and operational robustness under realistic MSW derived feed variability [264].

9.4. Waste to Biochar

Biochar production from organic MSW fractions provides a dual opportunity for landfill diversion and carbon sequestration, but consistent performance requires feedstock

standardization and contaminant management. Landfilling and incineration create major environmental burdens through methane emissions, leachate generation, and formation of heavy-metal-rich ash and air pollutants [265,266]. In the U.S., landfills contributed 17.1% of total methane emissions (119.8 million metric tons CO_2e) in a 2022 inventory [267]. Biochar production via pyrolysis offers an alternative pathway to divert organic MSW fractions, produce a recalcitrant carbon material with higher C/N than the feedstock, and support carbon sequestration and soil benefits.

Mixed MSW biochar research is expanding, but inconsistent feedstock composition across studies leads to variability in biochar physicochemical properties [268]. Given the U.S. landfill composition of food waste (24.14%), plastics (18.46%), paper (11.78%), metals (9.53%), and yard trimmings (7.21%), substantial organic carbon is available for conversion. Biochar sequestration potential has been estimated at 2.57–6.60 Gt CO_2e yr^{-1}, alongside soil benefits such as improved water retention and cation exchange capacity [269]. Specific studies demonstrate functionality: art paper biochar produced at 600 °C achieved Pb(II) sorption capacity of 1500 mg g^{-1} due to reactive calcite phases [270]. Biochar produced at >500 °C is generally better suited for sequestration, whereas ≤300 °C chars may better support soil fertility [271]. Recent work demonstrates that co-pyrolysis can systematically influence biochar yield and quality, particularly when heterogeneous MSW-derived organics are co-processed with complementary waste fractions such as plastics, yard trimmings, or other carbon-rich residues. In these systems, the resulting biochar is not governed by temperature alone, but by a blend-chemistry effect in which the identity and proportion of the co-fed fraction shape secondary reactions, carbon retention, and solid-phase structure [272,273]. In this context, co-pyrolysis of corn stem and polyethylene at 600 °C yielded 31.8% biochar with 76.53% carbon, supporting sequestration and soil enhancement [274]. Controlled experiments using mixed municipal and horticultural wastes demonstrate that the feed blending ratio, along with the catalytic environment when applicable, is a primary factor controlling both biochar yield and surface functionality [272]. Experimental evidence suggests that co-pyrolysis of MSW with lignocellulosic feedstocks in the presence of low cost, waste-derived catalysts influence devolatilization and secondary reactions, reinforcing the importance of feed selection and controlled conditions in determining biochar physicochemical properties [275]. Studies on biomass and plastic co-pyrolysis show that hydrogen-rich polymer volatiles modify the balance between condensation and cracking reactions. This enables purposeful tuning of solid residue properties when contaminant constraints such as ash, halogens, and metals are treated as primary design variables [273]. Beyond their influence on carbon yield and char chemistry, co-pyrolysis strategies are increasingly used for contaminant stabilization, which ultimately conditions whether MSW-derived biochars can be safely deployed in environmental applications. Waste co-pyrolysis studies targeting problematic inorganics show that sludge mineral or slag assisted co-processing can promote heavy-metal stabilization in the solid phase through the formation of more stable mineral associated or residual fractions [276]. Reviews of sewage sludge and biomass co-pyrolysis consistently report that co-feeding biomass reduces heavy metal concentrations and ecological risk in sludge-derived biochars, reinforcing the need to consider solid-phase safety alongside char yield and carbon sequestration objectives [277].

The above discussion highlights that valorization outcomes from MSW are fundamentally design-dependent, affected by feed composition, processing severity, and contaminant management.

Table 3 presents MSW fraction-to-valorization route selection recommended pathways and constraints. Across all valorization routes, feedstock conditioning and contaminant

control are the dominant determinants of conversion efficiency, product quality, and environmental performance. The comparative analysis shows that no single conversion route is suitable for all MSW fractions. Effective MSW utilization requires route selection based on fraction-specific properties such as moisture content, organic composition, ash content, contamination level, and calorific value. Biochemical routes are more suitable for organic waste fractions with high moisture content, whereas thermochemical pathways are generally more appropriate for dry fractions such as plastics, paper, textiles, and mixed residuals. Emerging approaches, including gasification, sustainable aviation fuel production, and plasma-assisted syngas conditioning, can further expand the value recovery potential of MSW when matched with suitable feedstock streams.

Table 3. MSW fraction-to-valorization route selection recommended pathways and constraints.

MSW Fraction/Condition	Best-Fit Valorization Route(s)	Rationale	Key Constraints/Risks	Representative Citations
High-moisture organics (food, yard)	Anaerobic digestion, composting, hydrothermal routes	High biodegradability, avoids drying	NH_3/H_2S management, contamination	[133,218]
Cellulosic paper/wood (clean)	AD/fermentation, pyrolysis, gasification	Convertible to biogas/sugars, char/syngas	Moisture variability, sorting needed	[217]
Mixed plastics (non-PVC dominated)	Pyrolysis, gasification, WtE	High LHV/volatiles; energy dense	Contamination and drying, halogens	[187]
PVC-rich or halogenated plastics	Avoid thermal routes unless robust scrubbing	Halogens cause acid gas/dioxin risks	HCl formation, corrosive emissions	[180]
Mixed residuals (high heterogeneity)	Incineration/WtE, plasma gasification	Tolerates heterogeneity	Ash/heavy metals, tar/corrosives	[220,256]
Ash-rich paper/composites	Biochar (controlled pyrolysis), WtE with ash handling	Higher char yield, alkalinity potential	Metals/ash handling, quality control	[268]
Lipid-rich wastes (FOG, oils)	Physico-chemical routes (biodiesel, electro-demulsification)	Direct liquid fuel pathway	Feedstock variability; water removal	[222,223]
Syngas-to-fuels (FT/SAF) feedstock	Gasification + FT (SAF), ATR integration	Drop-in fuels, scalable	Clean syngas required, policy/TEA sensitivity	[240,278]
Carbon sequestration priority	Biochar from organics/paper	Durable carbon, soil benefits	Feed contamination, property variability	[269,271]

10. Life Cycle Assessment (LCA) and Techno-Economic Analysis (TEA) of MSW Valorization Pathways

LCA and TEA have emerged as critical tools for evaluating the feasibility and sustainability of MSW valorization pathways [255,266]. The production of value-added products such as SAF, syngas, and biochar can reduce overall carbon emissions compared with MSW landfilling [279]. As illustrated in Table 4, the Fischer–Tropsch (FT) pathway shows the highest reported SAF yield, whereas the alcohol-to-jet (ATJ) pathway has the highest technology readiness level (TRL), as demonstrated by LanzaJet [280]. Syngas production as an intermediate chemical has shown considerable potential at smaller production scales and with lower capital-investment requirements [281]. Similarly, ethanol production can reduce GHG emissions at viable production scales, although MSW composition remains a key factor controlling yield, economic cost, and environmental performance [282]. Extracting additional products from organic MSW fermentation, such as succinic acid and biogas, can further reduce GHG emissions by up to 80% [283]. Biochar production via slow pyrolysis has a high TRL and relatively low carbon emissions; however, larger production scales are generally required for economic viability [266]. The integration of multiple valorization pathways within a biorefinery framework may improve economic viability and environmental performance by maximizing resource recovery and diversifying product portfolios.

Table 4. Summary of the environmental and economic trade-offs of different valorization routes for MSW.

Bioproduct/ Biofuel	Production Pathway	Yield (%)	TRL	GHG Emissions ($kgCO_2$ e/kg Product)	Viable Production Rate	Minimum Selling Price (USD/kg)	Ref.
Sustainable Aviation Fuel (SAF)	Fischer–Tropsch (FT)	15–31	6–8	0.42–1.46	500 (million L/yr)	2.13–2.60	[284]
	Alcohol-to-jet (ATJ)	7–15	7–9	1.16–1.37	700 (million L/yr)	1.5–1.8	[285]
	Pyrolysis	8–18	4–7	1.61–3.23	180 (million L/yr)	1.3–2.1	[286]
Syngas	Gasification	65.2–82.5	8–9	0.11–0.13	3.82 (million kg/yr)	0.24–0.27	[281,287]
	Fast pyrolysis	17.7–19.9	6–8	0.10–0.41	30 (million L/yr)	0.71–1.28	[288]
Biochar	Hydrothermal carbonization	40.74–51.3	6–8	0.68–0.73	10,000 (tons/yr)	0.18–0.19	[289,290]
	Slow pyrolysis	25.6–35.6	8–9	0.34–0.46	10,000 (tons/yr)	0.17–0.19	[17]
Bio-oil	Hydrothermal Liquefaction (HTL)	30–55	6–8	1.85–1.96	40,000–45,000 (tons/yr)	0.25–0.82	[291]
	Fast pyrolysis	15–43.5	6–8	0.5–1.54	107.3–258.4 (million L/yr)	0.78–1.13	[292]
Methanol	Gasification	41–44	7–9	0.5–1.4	99,000 (tons/yr)	0.12–0.13	[293]
Ethanol	Fermentation	7–24	6–8	0.58–3.10	10 (million L/yr)	0.17–2.55	[282,283]

11. Conclusions

MSW generation is increasing at a pace that challenges existing management systems, with global quantities projected to rise from approximately 2.0 to 3.4 billion tonnes per year by 2050 and a substantial fraction still mismanaged or landfilled. This scale necessitates a transition from end-of-pipe disposal strategies toward integrated, circular MSW systems that preserve material quality, minimize residuals, and maximize resource recovery across the entire value chain, from bin to final product.

This review demonstrates that two interventions dominate both climate and circularity outcomes: (i) effective source separation, particularly of organic fractions, mitigating landfill methane emissions, and (ii) high-fidelity sorting to protect the quality and value of recyclable and convertible materials. Landfilled organics remain a leading contributor to methane emissions, making targeted diversion, coupled with landfill gas controls, among the most immediate and impactful mitigation levers. At the facility level, advances in sorting, especially multi-sensor, AI-enabled systems integrating optical, spectral, and X-ray techniques, have transformed MRFs from manually intensive operations into data-driven platforms capable of achieving high classification accuracy at industrial throughput. When paired with standardized characterization protocols, including hazardous fractions, these systems reduce operational risk and improve downstream process reliability.

Across valorization pathways, feedstock conditioning and contaminant control consistently emerge as the primary determinants of performance. Biochemical routes are best suited for wet, biodegradable fractions, whereas thermochemical platforms, incineration with energy recovery, gasification to syngas, and pyrolysis to bio-oil and biochar, are currently the most deployment-ready options for heterogeneous MSW. However, their efficiency, emissions profile, and economic viability are highly sensitive to sorting quality, preprocessing intensity, and system integration. Among these routes, biochar production from organic MSW fractions offers particular promise by combining landfill diversion with durable carbon sequestration and soil co-benefits, although consistency in biochar properties requires feedstock standardization and careful management of ash and contaminants. MSW-to-SAF pathways show strong long-term potential, especially through gasification and Fischer–Tropsch synthesis, but remain constrained by feedstock

heterogeneity, syngas cleanliness requirements, and the absence of carbon-negative performance at scale.

Looking forward, the future of MSW management lies in digitally enabled, infrastructure-level optimization. For recycling infrastructure, the key priority is to integrate source separation, standardized characterization, real-time sensing, AI-enabled sorting, adaptive preprocessing, and route-specific feedstock allocation within MRFs, consistent with recent studies on AI-powered MSW management from generation to utilization and hyperspectral imaging-based real-time waste material characterization. Such integration would allow facilities to separate wet organic fractions, high-value recyclable plastics, metals, clean paper-rich streams, and high-calorific residuals more efficiently. These separated streams can then be directed toward the most suitable downstream pathways: wet organics to anaerobic digestion, fermentation, composting, or hydrothermal processing; clean cellulose-rich paper fractions to biochemical conversion; clean plastic fractions to mechanical or thermochemical recycling; and mixed residuals to waste-to-energy or syngas-based routes. For industrial applications, successful deployment will require maintaining feedstock quality, controlling contaminants, linking MRFs with downstream users, and using LCA and TEA as decision-support tools for technology selection, facility retrofitting, scale-up, and investment. In this context, smart MSW systems would dynamically allocate waste streams to the most appropriate recovery or conversion pathway, maximizing both economic value and environmental benefit. Equally important is policy alignment, including harmonized characterization standards, incentives for source separation, extended producer responsibility frameworks, and market development for recovered materials and carbon-negative products to support deployment at scale.

Despite these opportunities, several limitations should be recognized. The comparison of MSW management and valorization pathways is constrained by regional variability in waste composition, inconsistent reporting of feedstock properties, differences in system boundaries used for LCA and TEA, and limited availability of industrial-scale performance data for emerging technologies. Future research should therefore prioritize standardized MSW characterization protocols, open datasets for sensor- and AI-enabled sorting, pilot- and demonstration-scale validation of emerging conversion technologies, harmonized LCA and TEA frameworks, and contaminant-control strategies that link upstream sorting with downstream product quality. These efforts would help translate the bin-to-circularity framework from a conceptual review structure into practical guidance for recycling infrastructure optimization, industrial deployment, and circular-economy implementation. In summary, achieving circularity in MSW management requires coordinated advances in source separation, high-resolution sorting, right-sized preprocessing, and conversion technologies, supported by robust data, policy coherence, and market demand. With continued innovation and integration, MSW can transition from a disposal burden to a resilient source of renewable carbon, energy, and materials, contributing meaningfully to climate mitigation and resource conservation goals.

Author Contributions: Conceptualization, R.R. and L.P. (Lokendra Pal); methodology, R.R., A.S., R.K., M.S., L.P. (Luis Pena), N.H., S.R., V.S., R.T. and L.P. (Lokendra Pal); formal analysis, R.R.; investigation, R.R.; resources, L.P. (Lokendra Pal); data curation, R.R., R.K., N.H. and R.T.; writing—original draft preparation, R.R., A.S., R.K., N.H., S.R. and R.T.; writing—review and editing, M.S. and L.P. (Lokendra Pal); visualization, R.R., A.S., R.K., M.S., S.R., R.T. and L.P. (Lokendra Pal); supervision, L.P. (Lokendra Pal); project administration, L.P. (Lokendra Pal); funding acquisition, L.P. (Lokendra Pal). All authors have read and agreed to the published version of the manuscript.

Funding: This material is based upon work supported by the U.S. Department of Energy's Office of Energy Efficiency and Renewable Energy (EERE) under the Bioenergy Technologies Office (BETO) Award Number DE-EE0009669.

Data Availability Statement: No new data were created or analyzed in this study. Data sharing is not applicable to this article.

Acknowledgments: We would like to acknowledge the valuable support of Srijana Guilford and Jesse Troublefield (The Town of Cary, NC). The contributions of L.P. (Lokendra Pal) are in part supported by the E.J. "Woody" Rice Professorship Endowment. During the preparation of this manuscript, OpenAI's ChatGPT (GPT-5) was used for language editing, text organization, and improving writing clarity. The authors reviewed, edited, and verified all generated content and take full responsibility for the scientific accuracy and content of the article.

Conflicts of Interest: The authors declare no conflict of interest. Disclaimer: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States government nor any agency thereof, nor any of its employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness.

Appendix A

Table A1. MSW generation data across categories from 1960 to 2018 [5,84,294]. Metal includes ferrous, aluminum, and other nonferrous metals, while "others" include electrolytes in batteries and fluff pulp, fecal matter, and miscellaneous inorganic wastes.

Materials	Percentage of Waste Generated (1960–2018)									
	1960	**1970**	**1980**	**1990**	**2000**	**2005**	**2010**	**2015**	**2017**	**2018**
Paper	34.0	36.6	36.4	34.9	36.0	33.4	28.4	26.0	24.9	23.1
Plastic	0.4	2.4	4.5	8.2	10.5	11.6	12.5	13.2	13.2	12.2
Food	13.8	10.6	8.6	11.5	12.6	13.0	14.2	15.2	15.1	21.6
Textile	2.0	1.7	1.7	2.8	3.9	4.5	5.3	6.1	6.3	5.8
Glass	7.6	10.5	10.0	6.3	5.2	4.9	4.6	4.4	4.6	4.2
Metal	12.3	11.4	10.2	7.9	7.8	8.0	8.9	9.1	9.4	8.8
Rubber & leather	2.1	2.5	2.8	2.8	2.7	2.9	3.1	3.3	3.4	3.1
Wood	3.4	3.1	4.6	5.9	5.6	5.8	6.3	6.2	6.8	6.2
Yard trimmings	22.7	19.2	18.1	16.8	12.5	12.6	13.3	13.2	13.1	12.1
Other	1.6	2.1	3.2	2.9	3.0	3.2	3.4	3.3	3.2	2.9

Table A2. Percentage composition of MSW generated across regions in the U.S. (Other category includes * C&D waste, household hazardous waste (HHW) and other materials; ** electronics, HHW, tires, mattresses).

Region	Year	Paper	Plastic	Food	Textile	Yard	Glass	Metal	Wood	Other	Ref.
Phoenix	2015	12.6	9.8	14.68	N/A	29.91	1.9	N/A	N/A	31.1 *	[295]
California	2021	15.5	13.7	10.9	3.5	6.7	2.3	4.9	10.6	31.9 **	[82]
Colorado	2018	19.2	13.2	18.2	5.4	10.5	4.2	4.7	0.9	23.7 **	[296]
Connecticut	2015	23.1	11.8	22.3	5.7	6.9	2.5	3.5	7.4	16.8 **	[297]
Delaware	2016	23.6	14.9	21.1	5.2	4.4	2.6	3.1	6.5	18.6 **	[79]
Illinois	2015	21.1	15.4	20.2	6.9	5.1	4.2	4.3	5.1	17.7 **	[298]
Vermont	2018	22	12.4	20.8	6.1	1.5	2.3	2.7	5.2	27 **	[299]

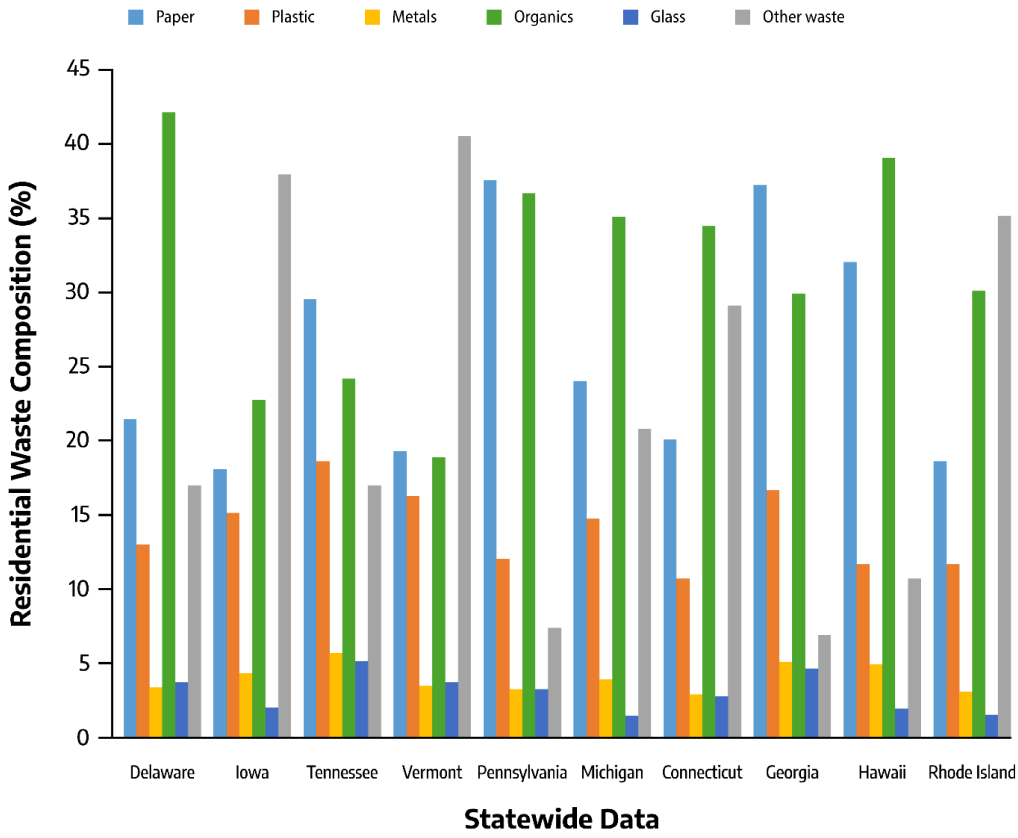


Figure A1. Composition of residential waste in ten states of the United States. Data were extracted from Solid Waste management plan reports from [79,80,297–303]. Other waste includes C&D, residual and electronic waste for some of the state data.

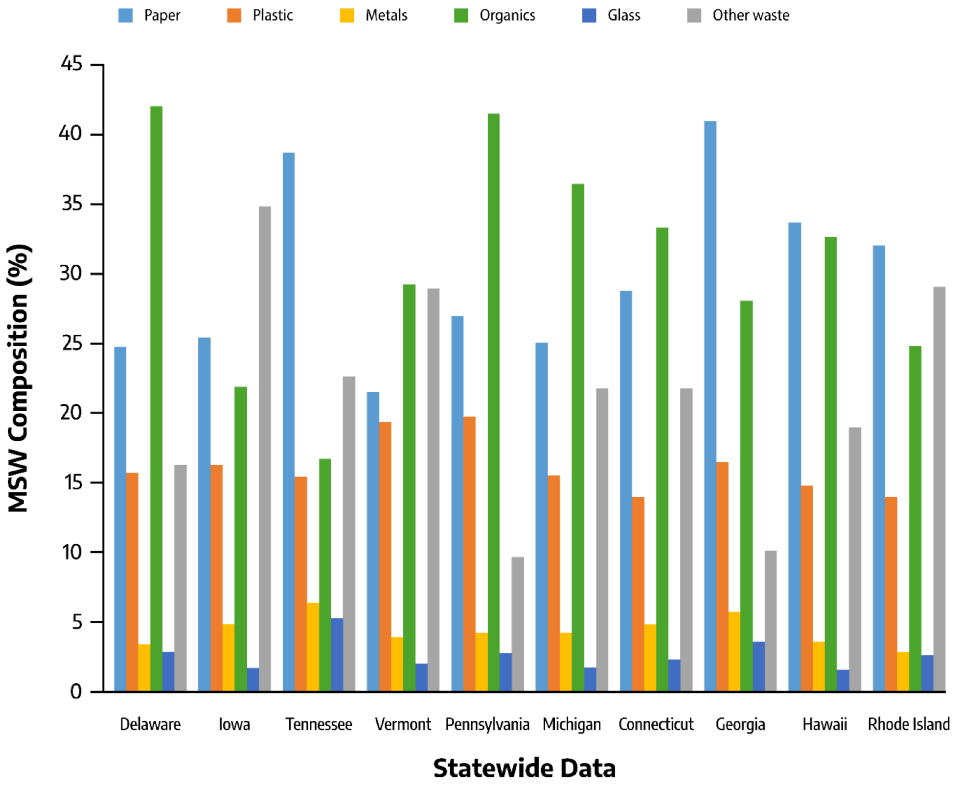


Figure A2. Composition of commercial waste in different states of the United States. Data were extracted from Solid Waste management plan reports, data from [79,80,297–303].

References

1. Kaza, S.; Yao, L.; Bhada-Tata, P.; Van Woerden, F. *What a Waste 2.0: A Global Snapshot of Solid Waste Management to 2050*; World Bank Group: Washington, DC, USA, 2018.
2. Waste Atlas. What a Waste: An Updated Look into the Future of Solid Waste Management. Available online: https://www.worldbank.org/en/news/immersive-story/2018/09/20/what-a-waste-an-updated-look-into-the-future-of-solid-waste-management (accessed on 13 August 2025).
3. US EPA. National Overview: Facts and Figures on Materials, Wastes and Recycling. Available online: https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/national-overview-facts-and-figures-materials (accessed on 7 October 2024).
4. Hoornweg, D.; Bhada-Tata, P. What a Waste: A Global Review of Solid Waste Management. Available online: https://documents1.worldbank.org/curated/en/302314468126264791/pdf/68135-REVISED-What-a-Waste-2012-Final-updated.pdf (accessed on 21 February 2025).
5. EPA. Advancing Sustainable Materials Management: 2018 Fact Sheet. Available online: https://www.epa.gov/sites/default/files/2021-01/documents/2018_ff_fact_sheet_dec_2020_fnl_508.pdf (accessed on 6 October 2024).
6. Mohanty, S.S.; Koul, Y.; Varjani, S.; Pandey, A.; Ngo, H.H.; Chang, J.S.; Wong, J.W.C.; Bui, X.T. A Critical Review on Various Feedstocks as Sustainable Substrates for Biosurfactants Production: A Way towards Cleaner Production. *Microb. Cell Fact.* **2021**, *20*, 120. [CrossRef] [PubMed]
7. Roy, H.; Alam, S.R.; Bin-Masud, R.; Prantika, T.R.; Pervez, M.N.; Islam, M.S.; Naddeo, V. A Review on Characteristics, Techniques, and Waste-to-Energy Aspects of Municipal Solid Waste Management: Bangladesh Perspective. *Sustainability* **2022**, *14*, 10265. [CrossRef]
8. Clemente, E.; Domingues, E.; Quinta-Ferreira, R.M.; Leitão, A.; Martins, R.C. European and African Landfilling Practices: An Overview on MSW Management, Leachate Characterization and Treatment Technologies. *J. Water Process Eng.* **2024**, *66*, 105931. [CrossRef]
9. Siddique, R. Utilization of Municipal Solid Waste (MSW) Ash in Cement and Mortar. *Resour. Conserv. Recycl.* **2010**, *54*, 1037–1047. [CrossRef]
10. Gu, B.; Jiang, S.; Wang, H.; Wang, Z.; Jia, R.; Yang, J.; He, S.; Cheng, R. Characterization, Quantification and Management of China's Municipal Solid Waste in Spatiotemporal Distributions: A Review. *Waste Manag.* **2017**, *61*, 67–77. [CrossRef] [PubMed]
11. Gundupalli, S.P.; Hait, S.; Thakur, A. A Review on Automated Sorting of Source-Separated Municipal Solid Waste for Recycling. *Waste Manag.* **2017**, *60*, 56–74. [CrossRef] [PubMed]
12. Zhang, Y.; Kusch-Brandt, S.; Gu, S.; Heaven, S. Particle Size Distribution in Municipal Solid Waste Pre-Treated for Bioprocessing. *Resources* **2019**, *8*, 166. [CrossRef]
13. Salem, K.S.; Clayson, K.; Salas, M.; Haque, N.; Rao, R.; Agate, S.; Singh, A.; Levis, J.W.; Mittal, A.; Yarbrough, J.M.; et al. A Critical Review of Existing and Emerging Technologies and Systems to Optimize Solid Waste Management for Feedstocks and Energy Conversion. *Matter* **2023**, *6*, 3348–3377. [CrossRef]
14. Sondh, S.; Upadhyay, D.S.; Patel, S.; Patel, R.N. Strategic Approach towards Sustainability by Promoting Circular Economy-Based Municipal Solid Waste Management System- A Review. *Sustain. Chem. Pharm.* **2024**, *37*, 101337. [CrossRef]
15. Zhang, Z.; Chen, Z.; Zhang, J.; Liu, Y.; Chen, L.; Yang, M.; Osman, A.I.; Farghali, M.; Liu, E.; Hassan, D.; et al. Municipal Solid Waste Management Challenges in Developing Regions: A Comprehensive Review and Future Perspectives for Asia and Africa. *Sci. Total Environ.* **2024**, *930*, 172794. [CrossRef] [PubMed]
16. Satav, A.G.; Kubade, S.; Amrutkar, C.; Arya, G.; Pawar, A. A State-of-the-Art Review on Robotics in Waste Sorting: Scope and Challenges. *Int. J. Interact. Des. Manuf. (IJIDeM)* **2023**, *17*, 2789–2806. [CrossRef]
17. Yek, P.N.Y.; Chan, Y.H.; Foong, S.Y.; Mahari, W.A.W.; Chen, X.; Liew, R.K.; Ma, N.L.; Tsang, Y.F.; Sonne, C.; Cheng, Y.W.; et al. Co-Processing Plastics Waste and Biomass by Pyrolysis–Gasification: A Review. *Environ. Chem. Lett.* **2023**, *22*, 171–188. [CrossRef]
18. Qi, Y.; Muhammad, U.; Zhang, W.; Song, Y.; Zhang, M.; Wang, M.; Xu, C.; Xu, Y.; Cai, S.; Han, C.; et al. A Comprehensive Evaluation of Recent Advancement in Municipal Solid Waste Gasification: Research Status, Technical Challenges and Perspectives. *Sep. Purif. Technol.* **2025**, *358*, 130443. [CrossRef]
19. Soni, A.; Gupta, S.K.; Rajamohan, N.; Yusuf, M. Waste-to-Energy Technologies: A Sustainable Pathway for Resource Recovery and Materials Management. *Mater. Adv.* **2025**, *6*, 4598–4622. [CrossRef]
20. Kafle, S.; Karki, B.K.; Sakhakarmy, M.; Adhikari, S. A Review of Global Municipal Solid Waste Management and Valorization Pathways. *Recycling* **2025**, *10*, 113. [CrossRef]
21. Emmanouilidou, E.; Mitkidou, S.; Agapiou, A.; Kokkinos, N.C. Solid Waste Biomass as a Potential Feedstock for Producing Sustainable Aviation Fuel: A Systematic Review. *Renew. Energy* **2023**, *206*, 897–907. [CrossRef]
22. Rashad, M.A.; Hussain, M.; Akhter, P.; Hamayun, M.H.; Ahsan, A.; Jamil, F.; Lee, D.; Park, Y.-K. Transforming Municipal Solid Waste Management: Current Status of Segregation Challenges, Waste-to-Energy Technologies, and Circular Economy Strategies. *J. Ind. Eng. Chem.* **2026**, *153*, 122–134. [CrossRef]

23. Appiah, H.; Asamoah, P.; McDonald, A.G. Waste-to-Energy Technologies and Their Role in Municipal Solid Waste Management. *Recycling* **2026**, *11*, 56. [CrossRef]
24. Pérez-Morales, L.Y.; Guzmán-López, A.; Miranda-López, R.; Bravo-Sánchez, M.G.; Botello-Álvarez, J.E. A Review of Organic Municipal Waste Management in Medium Cities in Latin America. *Recycling* **2026**, *11*, 73. [CrossRef]
25. Lin, Y.; Ding, L.; Burli, P.H.; Brown, R.M.; Herrera Diaz, M.A. MSW Characterization and Preprocessing for Biofuels and Bioproducts. *Adv. Bioenergy* **2023**, *8*, 197–238. [CrossRef]
26. Cimpan, C.; Maul, A.; Jansen, M.; Pretz, T.; Wenzel, H. Central Sorting and Recovery of MSW Recyclable Materials: A Review of Technological State-of-the-Art, Cases, Practice and Implications for Materials Recycling. *J. Environ. Manag.* **2015**, *156*, 181–199. [CrossRef]
27. Rao, R.; Singh, S.; Salas, M.; Sarker, A.; Kumar, R.; Wang, Y.; Lucia, L.; Mittal, A.; Yarbrough, J.; Barlaz, M.A. AI-Powered Municipal Solid Waste Management: A Comprehensive Review from Generation to Utilization. *Front. Energy Res.* **2025**, *13*, 1670679. [CrossRef]
28. Varjani, S.; Shahbeig, H.; Popat, K.; Patel, Z.; Vyas, S.; Shah, A.V.; Barceló, D.; Hao Ngo, H.; Sonne, C.; Shiung Lam, S.; et al. Sustainable Management of Municipal Solid Waste through Waste-to-Energy Technologies. *Bioresour. Technol.* **2022**, *355*, 127247. [CrossRef] [PubMed]
29. Silva de Souza Lima Cano, N.; Iacovidou, E.; Rutkowski, E.W. Typology of Municipal Solid Waste Recycling Value Chains: A Global Perspective. *J. Clean. Prod.* **2022**, *336*, 130386. [CrossRef]
30. MassDEP. Massachusetts Department of Environmental Protection: 2016 Waste Characterization Study. Available online: https://www.epa.gov/sites/default/files/2016-03/documents/r02002.pdf (accessed on 22 February 2025).
31. Singh, G.K.; Gupta, K.; Chaudhary, S. Solid Waste Management: Its Sources, Collection, Transportation and Recycling. *Int. J. Environ. Sci. Dev.* **2014**, *5*, 347–351. [CrossRef]
32. Zhou, C.; Ma, S.; Yu, X.; Chen, Z.; Liu, J.; Yan, L. A Comparison Study of Bottom-up and Top-down Methods for Analyzing the Physical Composition of Municipal Solid Waste. *J. Ind. Ecol.* **2022**, *26*, 240–251. [CrossRef]
33. Vines, V.; Pasquali, M.; Ganguli, S.; Meyer, D.E. Understanding the Trade-Offs of National Municipal Solid Waste Estimation Methods for Circular Economy Policy. *J. Clean. Prod.* **2023**, *412*, 137349. [CrossRef] [PubMed]
34. Tchobanoglous, G.; Kreith, F. *Handbook of Solid Waste Management*, 2nd ed.; McGraw-Hill: New York, NY, USA, 2002.
35. Kollikkathara, N.; Feng, H.; Stern, E. A Purview of Waste Management Evolution: Special Emphasis on USA. *Waste Manag.* **2009**, *29*, 974–985. [CrossRef] [PubMed]
36. US EPA. 40 CFR Part 256: Guidelines for Development and Implementation of State Solid Waste Management Plans. Available online: https://www.ecfr.gov/current/title-40/chapter-I/subchapter-I/part-256 (accessed on 27 October 2024).
37. US EPA. Resource Conservation and Recovery Act (RCRA) and Federal Facilities. Available online: https://www.epa.gov/enforcement/resource-conservation-and-recovery-act-rcra-and-federal-facilities (accessed on 27 October 2024).
38. US EPA Environmental Protection Agency. 40 CFR Part 258 Revisions to Criteria for Municipal Solid Waste Landfills; Federal Register 1997. Volume 62, pp. 40708–40713. Available online: https://www.federalregister.gov/documents/1997/07/29/97-19942/revisions-to-criteria-for-municipal-solid-waste-landfills (accessed on 10 June 2026).
39. European Parliament and Council of the European Union. Directive 2008/98/EC of the European Parliament and of the Council of 19 November 2008 on Waste and Repealing Certain Directives. *Off. J. Eur. Union* **2008**, *L 312*, 3–30. Available online: https://eur-lex.europa.eu/eli/dir/2008/98/oj/eng (accessed on 10 June 2026).
40. European Parliament and Council of the European Union. Directive (EU) 2018/851 of the European Parliament and of the Council of 30 May 2018 Amending Directive 2008/98/EC on Waste. *Off. J. Eur. Union* **2018**, *L 150*, 109–140. Available online: https://eur-lex.europa.eu/eli/dir/2018/851/oj/eng (accessed on 10 June 2026).
41. European Parliament and Council of the European Union. Directive (EU) 2018/850 of the European Parliament and of the Council of 30 May 2018 Amending Directive 1999/31/EC on the Landfill of Waste. *Off. J. Eur. Union* **2018**, *L 150*, 100–108. Available online: https://eur-lex.europa.eu/eli/dir/2018/850/oj/eng (accessed on 10 June 2026).
42. United Nations Environment Programme. *Global Waste Management Outlook 2024: Beyond an Age of Waste- Turning Rubbish into a Resource*; United Nations Environment Programme: Nairobi, Kenya, 2024. Available online: https://wedocs.unep.org/handle/20.500.11822/44939 (accessed on 10 June 2026).
43. Dubois, M.; Sims, E.; Moerman, T.; Watson, D.; Bauer, B.; Bel, J.-B.; Mehlhart, G. *Guidance for Separate Collection of Municipal Waste*; Publications Office of the European Union: Luxembourg, 2020. [CrossRef] [PubMed]
44. European Environment Agency. *Monitoring Report on Progress Towards the 8th EAP Objectives 2025*; European Environment Agency: Copenhagen, Denmark, 2025.
45. Code of Federal Regulations 40 CFR 25.11 Work Elements in Financial Assistance Agreements (Up to Date as of 8-12-2025). Available online: https://www.ecfr.gov/current/title-40/chapter-I/subchapter-A/part-25/section-25.11 (accessed on 13 August 2025).

46. Missouri Revised Statutes Chapter 260 Conservation, Resources and Development Chapter 260—Environment Control. Available online: https://law.justia.com/codes/missouri/title-xvi/chapter-260/ (accessed on 27 October 2024).
47. Title 30 Texas Administrative Code: Title 30. Environmental Quality. Available online: https://www.tceq.texas.gov/permitting/air/rules/state (accessed on 13 August 2025).
48. US EPA. Sustainable Materials Management: Non-Hazardous Materials and Waste Management Hierarchy. Available online: https://www.epa.gov/smm/sustainable-materials-management-non-hazardous-materials-and-waste-management-hierarchy (accessed on 27 October 2024).
49. Reinhart, D. A Review of Recent Studies on the Sources of Hazardous Compounds Emitted from Solid Waste Landfills: A U.S. Experience. *Waste Manag. Res.* **1993**, *11*, 257–268. [CrossRef]
50. Bearden, D.M.; Tiemann, M.; Copeland, C.; Esworthy, R.; Luther, L.; Yen, J.H.; McCarthy, J.E. Environmental Laws: Summaries of Statutes Administered by the Environmental Protection Agency. Available online: https://sgp.fas.org/crs/misc/RL30798.pdf (accessed on 8 September 2025).
51. Schneeweiss, J. Proper Packaging Planning: Do We Need a Federal Law? *Va. Environ. Law J.* **1996**, *15*, 443–467.
52. Millar, S.A. Testing for Toxics in Packaging. *Pap. Film Foil Convert.* **2005**, *79*, 22.
53. Del Delumyea, R. Practical and Legal Problems Relating to the Proper Disposal of Hazardous Household Chemicals/Waste. In *Municipal Solid Wastes*; CRC Press: Boca Raton, FL, USA, 1996.
54. Starkey, D.; Hill, K. *A Legislator's Guide to Municipal Solid Waste Management*; The National Conference of State Legislatures: Denver, CO, USA, 1996.
55. NC DEQ. North Carolina Landfill Disposal Bans. Available online: https://www.deq.nc.gov/about/divisions/waste-management/solid-waste-section/compliance-and-monitoring/items-banned-disposal-landfills (accessed on 7 October 2024).
56. Electronic Waste Legislation. Map of States with Legislation. Available online: https://www.ecycleclearinghouse.org/contentpage.aspx?pageid=10 (accessed on 7 October 2024).
57. US EPA. EPA Releases Bold National Strategy to Transform Recycling in America. Available online: https://www.epa.gov/newsreleases/epa-releases-bold-national-strategy-transform-recycling-america (accessed on 27 October 2024).
58. US EPA. EPA Strategic Plan for FY 2022–2026. Available online: https://www.epa.gov/system/files/documents/2022-03/fy-2022-2026-epa-strategic-plan.pdf (accessed on 27 October 2024).
59. Sicotte, D.M.; Seamon, J.L. Solving the Plastics Problem: Moving the U.S. from Recycling to Reduction. *Soc. Nat. Resour.* **2021**, *34*, 393–402. [CrossRef]
60. NYSDEC. Methane Reduction Plan. Albany, NY, USA, May 2017. Available online: https://extapps.dec.ny.gov/docs/administration_pdf/mrpfinal.pdf (accessed on 10 August 2025).
61. NCSL. Extended Producer Responsibility Report. Available online: https://documents.ncsl.org/wwwncsl/Environment/Extended-Producer-Responsibility-f01.pdf (accessed on 8 September 2025).
62. CalRecycle. Building California's Circular Economy: Plastic Pollution Prevention and Packaging Producer Responsibility Act Implementation. Available online: https://calrecycle.ca.gov/packaging/packaging-epr/ (accessed on 11 June 2026).
63. Ross Strategic. *Plastic Packaging Stakeholder Advisory Committee Final Report*; Washington State Department of Ecology: Olympia, WA, USA, 2021. Available online: https://apps.ecology.wa.gov/publications/documents/2107038.pdf (accessed on 13 June 2026).
64. Maalouf, A.; Agamuthu, P. Waste Management Evolution in the Last Five Decades in Developing Countries—A Review. *Waste Manag. Res.* **2023**, *41*, 1420–1434. [CrossRef] [PubMed]
65. IFC. The World Has a Waste Problem. Here's How to Fix It. Available online: https://www.ifc.org/en/blogs/2024/the-world-has-a-waste-problem (accessed on 17 August 2025).
66. General Office of the State Council of the People's Republic of China. *Work Plan on "Zero-Waste City" Pilot Program in China*; General Office of the State Council of the People's Republic of China: Beijing, China, 2018. Available online: http://www.gov.cn/zhengce/content/2019-01/21/content_5359620.htm (accessed on 13 June 2026).
67. Liu, Z.; Xu, Y.; Adams, M.; Liu, W.; Walker, T.R.; Domenech, T.; Bleischwitz, R.; Geng, Y. Comparative Analysis of the Contribution of Municipal Waste Management Policies to GHG Reductions in China. *Waste Manag. Res. J. Sustain. Circ. Econ.* **2023**, *41*, 860–870. [CrossRef]
68. Press Information Bureau Government of India New Solid Waste Management Rules Notified; To Come into Force from April 1, 2026. Available online: https://www.pib.gov.in/PressReleasePage.aspx?PRID=2219676&lang=1&reg=3 (accessed on 9 June 2026).
69. Sakai, S.; Ikematsu, T.; Hirai, Y.; Yoshida, H. Unit-Charging Programs for Municipal Solid Waste in Japan. *Waste Manag.* **2008**, *28*, 2815–2825. [CrossRef] [PubMed]
70. Han, H.; Zhang, Z. The Impact of the Policy of Municipal Solid Waste Source-Separated Collection on Waste Reduction: A Case Study of China. *J. Mater. Cycles Waste Manag.* **2017**, *19*, 382–393. [CrossRef]

71. Department of Environment Forestry and Fisheries. *National Waste Management Strategy 2020*; Department of Environment Forestry and Fisheries: Pretoria, South Africa, 2020.
72. African Union Commission. *Continental Circular Economy Action Plan for Africa (2024–2034)*; African Union Commission: Addis Ababa, Ethiopia, 2024.
73. Save Our Seas 2.O Act, P.L. 116–224. United States Congress. Save Our Seas 2.0 Act, Public Law No. 116-224. Available online: https://www.congress.gov/116/plaws/publ224/PLAW-116publ224.pdf (accessed on 27 October 2024).
74. Bradshaw, S.L.; Aguirre-Villegas, H.A.; Boxman, S.E.; Benson, C.H. Material Recovery Facilities (MRFs) in the United States: Operations, Revenue, and the Impact of Scale. *Waste Manag.* **2025**, *193*, 317–327. [CrossRef] [PubMed]
75. US EPA. Best Practices: Source Separation Requirement or Preference. Available online: https://www.epa.gov/transforming-waste-tool/contracting-best-practices-source-separation-requirement-or-preference (accessed on 7 October 2024).
76. Iglesias Saragih, A.; Janjevic, M.; Winkenbach, M. Revitalizing Municipal Solid Waste Recycling: Review of Current U.S. Policies and Potential Directions for the Circular Economy. *MIT Sci. Policy Rev.* **2024**, *5*, 50–57. [CrossRef]
77. US EPA. National Recycling Strategy. Available online: https://www.epa.gov/circulareconomy/national-recycling-strategy (accessed on 25 September 2025).
78. Karak, T.; Bhagat, R.M.; Bhattacharyya, P. Municipal Solid Waste Generation, Composition, and Management: The World Scenario. *Crit. Rev. Environ. Sci. Technol.* **2012**, *42*, 1509–1630. [CrossRef]
79. Cascadia Consulting Group. Delaware Solid Waste Authority Waste Characterization Study FY 2016. Available online: https://dswa.com/wp-content/uploads/2017/02/Final-Report-DSWA-Waste-Characterization-FY-2016-January-2017.pdf (accessed on 21 October 2024).
80. Michigan Department of Environmental Quality. Economic Impact Potential and Characterization of Municipal Solid Waste in Michigan, USA. Available online: https://misbf.org/economic-impact-potential-and-characterization-of-municipal-solid-waste-in-michigan/ (accessed on 21 October 2024).
81. Cascadia Consulting Group. *Targeted Statewide Waste Characterization Study: Detailed Characterization of Commercial Self-Haul and Drop-Box Waste*; California Integrated Waste Management Board: Sacramento, CA, USA, 2006. Available online: https://www2.calrecycle.ca.gov/Docs/Publications/134304 (accessed on 13 June 2026).
82. CalRecycle. *Disposal Facility-Based Characterization of Solid Waste in California*; California Department of Resources Recycling and Recovery: Sacramento, CA, USA, 2024; Publication No. DRRR-2024-1737. Available online: https://www2.calrecycle.ca.gov/Docs/Publications/Details/1738 (accessed on 6 August 2024).
83. Chuah, S.-C.; Putit, L.; Singh, J.K. Assessing Residents' Intention towards Municipal Solid Waste Separation: A Case Study of Malaysia. *Plan. Malays.* **2023**, *21*, 382–399. [CrossRef]
84. US EPA. Advancing Sustainable Material Management: Facts and Figures Report. Available online: https://www.epa.gov/facts-and-figures-about-materials-waste-and-recycling/advancing-sustainable-materials-management (accessed on 7 October 2024).
85. Zhang, J.; Yang, H.; Xu, X. Research on Service Design of Garbage Classification Driven by Artificial Intelligence. *Sustainability* **2023**, *15*, 16454. [CrossRef]
86. Laurent, A.; Bakas, I.; Clavreul, J.; Bernstad, A.; Niero, M.; Gentil, E.; Hauschild, M.Z.; Christensen, T.H. Review of LCA Studies of Solid Waste Management Systems—Part I: Lessons Learned and Perspectives. *Waste Manag.* **2014**, *34*, 573–588. [CrossRef] [PubMed]
87. Laso, J.; García-Herrero, I.; Margallo, M.; Bala, A.; Fullana-i-Palmer, P.; Irabien, A.; Aldaco, R. LCA-Based Comparison of Two Organic Fraction Municipal Solid Waste Collection Systems in Historical Centres in Spain. *Energies* **2019**, *12*, 1407. [CrossRef]
88. Banar, M.; Cokaygil, Z.; Ozkan, A. Life Cycle Assessment of Solid Waste Management Options for Eskisehir, Turkey. *Waste Manag.* **2009**, *29*, 54–62. [CrossRef] [PubMed]
89. Leme, M.M.V.; Rocha, M.H.; Lora, E.E.S.; Venturini, O.J.; Lopes, B.M.; Ferreira, C.H. Techno-Economic Analysis and Environmental Impact Assessment of Energy Recovery from Municipal Solid Waste (MSW) in Brazil. *Resour. Conserv. Recycl.* **2014**, *87*, 8–20. [CrossRef]
90. Khan, M.M.U.H.; Jain, S.; Vaezi, M.; Kumar, A. Development of a Decision Model for the Techno-Economic Assessment of Municipal Solid Waste Utilization Pathways. *Waste Manag.* **2016**, *48*, 548–564. [CrossRef] [PubMed]
91. CalRecycle. Waste Characterization Studies Listing. Available online: https://www2.calrecycle.ca.gov/wastecharacterization/study (accessed on 11 August 2025).
92. NYC Department of Sanitation. NYC Waste Characterization Study. Available online: https://www.nyc.gov/assets/dsny/downloads/resources/reports/waste-characterization-studies/2023/wcs-2023.pdf (accessed on 22 February 2025).
93. CalRecycle. *2014 Disposal-Facility-Based Characterization of Solid Waste in California*; California Department of Resources Recycling and Recovery: Sacramento, CA, USA, 2015; Publication No. DRRR-2015-1546. Available online: https://www2.calrecycle.ca.gov/Docs/Publications/Details/1546 (accessed on 4 December 2024).

94. Pathak, D.R.; Mainali, B.; Abuel-Naga, H.; Angove, M.; Kong, I. Quantification and Characterization of the Municipal Solid Waste for Sustainable Waste Management in Newly Formed Municipalities of Nepal. *Waste Manag. Res.* **2020**, *38*, 1007–1018. [CrossRef] [PubMed]
95. US EPA. Electronic Code of Federal Regulations, Title 40: Protection of Environment, Part 261—Identification and Listing of Hazardous Waste. Available online: https://www.ecfr.gov/current/title-40/chapter-I/subchapter-I/part-261 (accessed on 6 October 2024).
96. OECD Stats. Municipal Waste: Generation and Treatment. Available online: https://stats.oecd.org/index.aspx?DataSetCode=MUNW# (accessed on 6 October 2024).
97. OECD Data. Hazardous Waste: Generation and Movements. Available online: https://data-explorer.oecd.org/ (accessed on 6 October 2024).
98. Eurostat Municipal Waste by Waste Management Operations (Env_wasmun). Available online: https://ec.europa.eu/eurostat/cache/metadata/en/env_wasmun_esms.htm#shortdata_descrDisseminated (accessed on 9 June 2026).
99. OECD Database Waste-Municipal Waste: Generation and Treatment. Available online: https://data-explorer.oecd.org/vis (accessed on 16 December 2024).
100. Federal Statistical Office of Germany. Waste Management in Germany 2023—Facts, Data, Figures. Available online: www.bmuv.de/en/publications (accessed on 5 June 2026).
101. Dickella Gamaralalage, P.J.; Ghosh, S.K.; Onogawa, K. Source Separation in Municipal Solid Waste Management: Practical Means to Its Success in Asian Cities. *Waste Manag. Res. J. Sustain. Circ. Econ.* **2022**, *40*, 360–370. [CrossRef]
102. Coffey, M.; Coad, A. *Collection of Municipal Solid Waste in Developing Countries*, 2nd ed.; United Nations Human Settlements Programme (UN-Habitat): Nairobi, Kenya, 2010. Available online: https://unhabitat.org/collection-of-municipal-solid-waste-in-developing-countries-2 (accessed on 10 June 2026).
103. Singh, N.; Hui, D.; Singh, R.; Ahuja, I.P.S.; Feo, L.; Fraternali, F. Recycling of Plastic Solid Waste: A State of Art Review and Future Applications. *Compos. B Eng.* **2017**, *115*, 409–422. [CrossRef]
104. Ncube, L.K.; Ude, A.U.; Ogunmuyiwa, E.N.; Zulkifli, R.; Beas, I.N. An Overview of Plastic Waste Generation and Management in Food Packaging Industries. *Recycling* **2021**, *6*, 12. [CrossRef]
105. Awino, F.B.; Apitz, S.E. Solid Waste Management in the Context of the Waste Hierarchy and Circular Economy Frameworks: An International Critical Review. *Integr. Environ. Assess. Manag.* **2024**, *20*, 9–35. [CrossRef] [PubMed]
106. Demetrious, A.; Verghese, K.; Stasinopoulos, P.; Crossin, E. Comparison of Alternative Methods for Managing the Residual of Material Recovery Facilities Using Life Cycle Assessment. *Resour. Conserv. Recycl.* **2018**, *136*, 33–45. [CrossRef]
107. Mohsenizadeh, M.; Tural, M.K.; Kentel, E. Municipal Solid Waste Management with Cost Minimization and Emission Control Objectives: A Case Study of Ankara. *Sustain. Cities Soc.* **2020**, *52*, 101807. [CrossRef]
108. Yadav, V.; Kalbar, P.P.; Karmakar, S.; Dikshit, A.K. A Two-Stage Multi-Attribute Decision-Making Model for Selecting Appropriate Locations of Waste Transfer Stations in Urban Centers. *Waste Manag.* **2020**, *114*, 80–88. [CrossRef] [PubMed]
109. US EPA. Solid Waste Collection and Disposal Programs. In *Tribal Decision-Maker's Guide to Solid Waste Management*; U.S. Environmental Protection Agency, Office of Solid Waste: Washington, DC, USA, 2003; Chapter 4; pp. 33–51.
110. Chen, H.; Yang, Y.; Jiang, W.; Song, M.; Wang, Y.; Xiang, T. Source Separation of Municipal Solid Waste: The Effects of Different Separation Methods and Citizens' Inclination—Case Study of Changsha, China. *J. Air Waste Manag. Assoc.* **2017**, *67*, 182–195. [CrossRef] [PubMed]
111. Yadav, V.; Karmakar, S. Sustainable Collection and Transportation of Municipal Solid Waste in Urban Centers. *Sustain. Cities Soc.* **2020**, *53*, 101937. [CrossRef]
112. Longo, H.; De Aragão, M.P.; Uchoa, E. Solving Capacitated Arc Routing Problems Using a Transformation to the CVRP. *Comput. Oper. Res.* **2006**, *33*, 1823–1837. [CrossRef]
113. Botti, L.; Battini, D.; Sgarbossa, F.; Mora, C. Door-to-Door Waste Collection: Analysis and Recommendations for Improving Ergonomics in an Italian Case Study. *Waste Manag.* **2020**, *109*, 149–160. [CrossRef] [PubMed]
114. Singh, D.; Dikshit, A.K.; Kumar, S. Smart Technological Options in Collection and Transportation of Municipal Solid Waste in Urban Areas: A Mini Review. *Waste Manag. Res.* **2024**, *42*, 3–15. [CrossRef] [PubMed]
115. Yadav, V.; Karmakar, S.; Dikshit, A.K.; Vanjari, S. A Feasibility Study for the Locations of Waste Transfer Stations in Urban Centers: A Case Study on the City of Nashik, India. *J. Clean. Prod.* **2016**, *126*, 191–205. [CrossRef]
116. Hettiarachchi, H.; Meegoda, J.N.; Ryu, S. Organic Waste Buyback as a Viable Method to Enhance Sustainable Municipal Solid Waste Management in Developing Countries. *Int. J. Environ. Res. Public Health* **2018**, *15*, 2483. [CrossRef] [PubMed]
117. Tsalis, T.; Amarantidou, S.; Calabró, P.; Nikolaou, I.; Komilis, D. Door-to-Door Recyclables Collection Programmes: Willingness to Participate and Influential Factors with a Case Study in the City of Xanthi (Greece). *Waste Manag. Res.* **2018**, *36*, 760–766. [CrossRef] [PubMed]
118. Ogwueleka, T.C. Survey of Household Waste Composition and Quantities in Abuja, Nigeria. *Resour. Conserv. Recycl.* **2013**, *77*, 52–60. [CrossRef]

119. Thanh, N.P.; Matsui, Y.; Fujiwara, T. Household Solid Waste Generation and Characteristic in a Mekong Delta City, Vietnam. *J. Environ. Manag.* **2010**, *91*, 2307–2321. [CrossRef] [PubMed]
120. Mangialardi, G.; Trullo, G.; Valerio, F.; Corallo, A. Sustainability of a Pneumatic Refuse System in the Metropolitan Area: A Case Study in Southern Apulia Region. *Procedia Soc. Behav. Sci.* **2016**, *223*, 799–804. [CrossRef]
121. Amal, L.; Son, L.H.; Chabchoub, H. SGA: Spatial GIS-Based Genetic Algorithm for Route Optimization of Municipal Solid Waste Collection. *Environ. Sci. Pollut.* **2018**, *25*, 27569–27582. [CrossRef] [PubMed]
122. Olafasakin, O.; Ma, J.; Bradshaw, S.L.; Aguirre-Villegas, H.A.; Benson, C.; Huber, G.W.; Zavala, V.M.; Mba-Wright, M. Techno-Economic and Life Cycle Assessment of Standalone Single-Stream Material Recovery Facilities in the United States. *Waste Manag.* **2023**, *166*, 368–376. [CrossRef] [PubMed]
123. Mukherjee, C.; Denney, J.; Mbonimpa, E.G.; Slagley, J.; Bhowmik, R. A Review on Municipal Solid Waste-to-Energy Trends in the USA. *Renew. Sustain. Energy Rev.* **2020**, *119*, 109512. [CrossRef]
124. LCSWMA. Lancaster Waste-To-Energy Facility. Available online: https://www.lcswma.org/facility/lancaster-waste-to-energy-facility/ (accessed on 21 December 2024).
125. Zhu, Y.; Zhang, Y.; Luo, D.; Chong, Z.; Li, E.; Kong, X. A Review of Municipal Solid Waste in China: Characteristics, Compositions, Influential Factors and Treatment Technologies. *Environ. Dev. Sustain.* **2021**, *23*, 6603–6622. [CrossRef]
126. Shah, A.V.; Srivastava, V.K.; Mohanty, S.S.; Varjani, S. Municipal Solid Waste as a Sustainable Resource for Energy Production: State-of-the-Art Review. *J. Environ. Chem. Eng.* **2021**, *9*, 105717. [CrossRef]
127. Wang, J.; Qiao, Z. A Comprehensive Review of Landfill Leachate Treatment Technologies. *Front. Environ. Sci.* **2024**, *12*, 1439128. [CrossRef]
128. Zainol, N.; Mustafa, N.; Aziz, N.H.; Azman, A.N.; Shaiful, M.; Karim, A. Dielectric Materials Development Using Bio-Waste: A Review. *J. Electr. Syst. Inf. Technol.* **2023**, *10*, 47. [CrossRef]
129. Zamri, M.F.M.A.; Hasmady, S.; Akhiar, A.; Ideris, F.; Shamsuddin, A.H.; Mofijur, M.; Fattah, I.M.R.; Mahlia, T.M.I. A Comprehensive Review on Anaerobic Digestion of Organic Fraction of Municipal Solid Waste. *Renew. Sustain. Energy Rev.* **2021**, *137*, 110637. [CrossRef]
130. Azam, M.; Jahromy, S.S.; Raza, W.; Raza, N.; Lee, S.S.; Kim, K.H.; Winter, F. Status, Characterization, and Potential Utilization of Municipal Solid Waste as Renewable Energy Source: Lahore Case Study in Pakistan. *Environ. Int.* **2020**, *134*, 105291. [CrossRef] [PubMed]
131. Xing, J.; Luo, K.; Wang, H.; Gao, Z.; Fan, J. A Comprehensive Study on Estimating Higher Heating Value of Biomass from Proximate and Ultimate Analysis with Machine Learning Approaches. *Energy* **2019**, *188*, 116077. [CrossRef]
132. Daskin, M.; Erdoğan, A.; Güleç, F.; Okolie, J.A. Generalizability of Empirical Correlations for Predicting Higher Heating Values of Biomass. *Energy Sources Part A Recovery Util. Environ. Eff.* **2024**, *46*, 5434–5450. [CrossRef]
133. Jain, S.; Jain, S.; Wolf, I.T.; Lee, J.; Tong, Y.W. A Comprehensive Review on Operating Parameters and Different Pretreatment Methodologies for Anaerobic Digestion of Municipal Solid Waste. *Renew. Sustain. Energy Rev.* **2015**, *52*, 142–154. [CrossRef]
134. US EPA. Characterization of Municipal Solid Waste in the United States: 1998 Update. Available online: https://archive.epa.gov/epawaste/nonhaz/municipal/web/pdf/98charac.pdf (accessed on 7 October 2024).
135. *ASTM D5231-92*; Standard Test Method for Determination of the Composition of Unprocessed Municipal Solid Waste. ASTM International: West Conshohocken, PA, USA, 1992. Available online: https://standards.iteh.ai/catalog/standards/sist/f3234b28-9ef3-4e6e-92da-8e203aa32405/astm-d5231-922016 (accessed on 7 October 2024).
136. United Nations Environment Program. Developing Integrated Solid Waste Management Plan, Waste Characterization and Quantification. Available online: https://www.unep.org/resources/report/developing-integrated-solid-waste-management-plan-training-manual-vol-2-assessment (accessed on 6 October 2024).
137. Washington State Department of Ecology. Guidelines for Waste Characterization Studies in the State of Washington. Available online: https://apps.ecology.wa.gov/publications/documents/1507040.pdf (accessed on 7 October 2024).
138. US EPA. Defining Hazardous Waste: Listed, Characteristic and Mixed Radiological Wastes. Available online: https://www.epa.gov/hw/defining-hazardous-waste-listed-characteristic-and-mixed-radiological-wastes (accessed on 7 October 2024).
139. US EPA. Hazardous Waste Characteristics: A User-Friendly Reference Document. Available online: http://www.epa.gov/epawaste/wyl/stateprograms.htm (accessed on 16 August 2025).
140. US EPA. Method: 1110a (Corrositivity Toward Steel). Available online: https://www.epa.gov/sites/default/files/2015-12/documents/1110a.pdf (accessed on 8 September 2025).
141. US EPA. 40 CFR Part 261, Section 261.23—Characteristic of Reactivity; Code of Federal Regulations, Title 40, Chapter I, Subchapter I, Part 261, Subpart C. U.S. Environmental Protection Agency: Washington, DC, USA. Available online: https://www.ecfr.gov/current/title-40/chapter-I/subchapter-I/part-261/subpart-C/section-261.23 (accessed on 13 June 2026).
142. US EPA. Method 1311 (Toxicity Characteristic Leaching Procedure). Available online: https://www.epa.gov/sites/default/files/2015-12/documents/1311.pdf (accessed on 8 September 2025).
143. US EPA. Safe Water Drinking Act. Available online: https://www.epa.gov/sdwa (accessed on 27 October 2024).

144. Kaufman, S.M.; Themelis, N.J. Using a Direct Method to Characterize and Measure Flows of Municipal Solid Waste in the United States. *J. Air Waste Manag. Assoc.* **2009**, *59*, 1386–1390. [CrossRef] [PubMed]
145. Baldé, C.P.; Angelo, E.D.'.; Luda, V.; Deubzer, O.; Kuehr, R. *Global Transboundary E-Waste Flows Monitor*; United Nations Institute for Training and Research (UNITAR): Bonn, Germany, 2022.
146. Forti, V.; Baldé, C.P.; Kuehr, R. *E-Waste Statistics: Guidelines on Classifications, Reporting and Indicators*, 2nd ed.; United Nations University, ViE-SCYCLE: Bonn, Germany, 2018.
147. Vats, M.C.; Singh, S.K. E-Waste Characteristic and Its Disposal. *Int. J. Ecol. Sci. Environ. Eng.* **2014**, *1*, 49–61.
148. Kahhat, R.; Kim, J.; Xu, M.; Allenby, B.; Williams, E.; Zhang, P. Exploring E-Waste Management Systems in the United States. *Resour. Conserv. Recycl.* **2008**, *52*, 955–964. [CrossRef]
149. Kahhat, R.; Williams, E. Materials Flow Analysis of E-Waste: Domestic Flows and Exports of Used Computers from the United States. *Resour. Conserv. Recycl.* **2012**, *67*, 67–74. [CrossRef]
150. Interagency Task Force on Electronics Stewardship, 2011. National Strategy for Electronics Stewardship. U.S. Environmental Protection Agency, Council on Environmental Quality, and U.S. General Services Administration, Washington, DC. Available online: https://www.epa.gov/electronics-batteries-management/national-strategy-electronics-stewardship-nses (accessed on 13 June 2026).
151. Zhang, B.; Lai, K.-h.; Wang, B.; Wang, Z. From Intention to Action: How Do Personal Attitudes, Facilities Accessibility, and Government Stimulus Matter for Household Waste Sorting? *J. Environ. Manag.* **2019**, *233*, 447–458. [CrossRef]
152. Luo, H.; Zhao, L.; Zhang, Z. The Impacts of Social Interaction-Based Factors on Household Waste-Related Behaviors. *Waste Manag.* **2020**, *118*, 270–280. [CrossRef] [PubMed]
153. Huang, J.; Pretz, T.; Bian, Z. Intelligent Solid Waste Processing Using Optical Sensor Based Sorting Technology. In *2010 3rd International Congress on Image and Signal Processing, CISP*; IEEE: Piscataway, NJ, USA, 2010; Volume 4, pp. 1657–1661. [CrossRef]
154. Gaustad, G.; Olivetti, E.; Kirchain, R. Improving Aluminum Recycling: A Survey of Sorting and Impurity Removal Technologies. *Resour. Conserv. Recycl.* **2012**, *58*, 79–87. [CrossRef]
155. Huang, J.; Tian, C.; Ren, J.; Bian, Z.; Luo, J.; Xuan, W.; Yong, R.; Fu, Q. Study on Impact Acoustic—Visual Sensor-Based Sorting of ELV Plastic Materials. *Sensors* **2017**, *17*, 1325. [CrossRef] [PubMed]
156. The Recycling Partnership. The 2020 State of Curbside Recycling Report. Available online: https://recyclingpartnership.org/stateofcurbside/ (accessed on 12 January 2025).
157. Smith, Y.R.; Nagel, J.R.; Rajamani, R.K. Eddy Current Separation for Recovery of Non-Ferrous Metallic Particles: A Comprehensive Review. *Miner. Eng.* **2019**, *133*, 149–159. [CrossRef]
158. Tao, Z.; Youcai, Z.; Atta Nyankson, E. Mechanical Separation of Municipal Solid Waste with Horizontal Air Separator. In *Resource Recovery Technology for Municipal and Rural Solid Waste*; Elsevier: Amsterdam, The Netherlands, 2023; pp. 131–157. [CrossRef]
159. Pressley, P.N.; Levis, J.W.; Damgaard, A.; Barlaz, M.A.; DeCarolis, J.F. Analysis of Material Recovery Facilities for Use in Life-Cycle Assessment. *Waste Manag.* **2015**, *35*, 307–317. [CrossRef] [PubMed]
160. Brooks, L.; Gaustad, G.; Gesing, A.; Mortvedt, T.; Freire, F. Ferrous and Non-Ferrous Recycling: Challenges and Potential Technology Solutions. *Waste Manag.* **2019**, *85*, 519–528. [CrossRef] [PubMed]
161. Svoboda, J.; Fujita, T. Recent Developments in Magnetic Methods of Material Separation. *Miner. Eng.* **2003**, *16*, 785–792. [CrossRef]
162. Luciani, V.; Bonifazi, G.; Rem, P.; Serranti, S. Upgrading of PVC Rich Wastes by Magnetic Density Separation and Hyperspectral Imaging Quality Control. *Waste Manag.* **2015**, *45*, 118–125. [CrossRef] [PubMed]
163. Feil, A.; Pretz, T.; Julius, J.; Go, N.; Bosling, M.; Johnen, K. Metal Waste. In *Waste: A Handbook for Management*; Elsevier: Amsterdam, The Netherlands, 2019; pp. 211–223.
164. Bashir, M.J.K.; Chong, S.-T.; Chin, Y.-T.; Yusoff, M.S.; Aziz, H.A. Single Waste Stream Processing and Material Recovery Facility (MRF). In *Solid Waste Engineering and Management*; Springer: Cham, Switzerland, 2022; pp. 71–164.
165. Bauer, M.; Lehner, M.; Schwabl, D.; Flachberger, H.; Kranzinger, L.; Pomberger, R.; Hofer, W. Sink–Float Density Separation of Post-Consumer Plastics for Feedstock Recycling. *J. Mater. Cycles Waste Manag.* **2018**, *20*, 1781–1791. [CrossRef]
166. Meneses Quelal, W.O.; Velázquez-Martí, B.; Ferrer Gisbert, A. Separation of Virgin Plastic Polymers and Post-Consumer Mixed Plastic Waste by Sinking-Flotation Technique. *Environ. Sci. Pollut. Res.* **2022**, *29*, 1364–1374. [CrossRef]
167. Pongstabodee, S.; Kunachitpimol, N.; Damronglerd, S. Combination of Three-Stage Sink–Float Method and Selective Flotation Technique for Separation of Mixed Post-Consumer Plastic Waste. *Waste Manag.* **2008**, *28*, 475–483. [CrossRef] [PubMed]
168. Dimas, T.; Peeters, J.; Eggers, A.; Vanierschot, M. Development and Validation of a Computational Fluid Dynamics Model for the Optimization of a Sink-Float Separator for Plastics Recycling. *Procedia CIRP* **2022**, *105*, 116–121. [CrossRef]
169. Roh, S.B.; Park, S.B.; Oh, S.K.; Park, E.K.; Choi, W.Z. Development of Intelligent Sorting System Realized with the Aid of Laser-Induced Breakdown Spectroscopy and Hybrid Preprocessing Algorithm-Based Radial Basis Function Neural Networks for Recycling Black Plastic Wastes. *J. Mater. Cycles Waste Manag.* **2018**, *20*, 1934–1949. [CrossRef]

170. Huber, N.; Eschlböck-Fuchs, S.; Scherndl, H.; Freimund, A.; Heitz, J.; Pedarnig, J.D. In-Line Measurements of Chlorine Containing Polymers in an Industrial Waste Sorting Plant by Laser-Induced Breakdown Spectroscopy. *Appl. Surf. Sci.* **2014**, *302*, 280–285. [CrossRef]
171. Holub, D.; Palásti, D.J.; Fintor, K.; Pořízka, P.; Galbács, G.; Kaiser, J. Classification of Diverse Plastic Samples by LIBS and Raman Data Fusion. *Polym. Test.* **2024**, *134*, 108414. [CrossRef]
172. Yan, X.; Peng, X.; Qin, Y.; Xu, Z.; Xu, B.; Li, C.; Zhao, N.; Li, J.; Ma, Q.; Zhang, Q. Classification of Plastics Using Laser-Induced Breakdown Spectroscopy Combined with Principal Component Analysis and K Nearest Neighbor Algorithm. *Results Opt.* **2021**, *4*, 100093. [CrossRef]
173. Rifai, K.; Doucet, F.; Özcan, L.; Vidal, F. LIBS Core Imaging at KHz Speed: Paving the Way for Real-Time Geochemical Applications. *Spectrochim. Acta Part B At. Spectrosc.* **2018**, *150*, 43–48. [CrossRef]
174. Gajarska, Z.; Brunnbauer, L.; Lohninger, H.; Limbeck, A. Identification of 20 Polymer Types by Means of Laser-Induced Breakdown Spectroscopy (LIBS) and Chemometrics. *Anal. Bioanal. Chem.* **2021**, *413*, 6581–6594. [CrossRef] [PubMed]
175. Howard, I.A.; Busko, D.; Gao, G.; Wendler, P.; Madirov, E.; Turshatov, A.; Moesslein, J.; Richards, B.S. Sorting Plastics Waste for a Circular Economy: Perspectives for Lanthanide Luminescent Markers. *Resour. Conserv. Recycl.* **2024**, *205*, 107557. [CrossRef]
176. Neubert, K.; Wotruba, H. Investigations on the Detectability of Rare-Earth Minerals Using Dual-Energy X-Ray Transmission Sorting. *J. Sustain. Metall.* **2017**, *3*, 3–12. [CrossRef]
177. Zhao, Y.; Li, J. Sensor-Based Technologies in Effective Solid Waste Sorting: Successful Applications, Sensor Combination, and Future Directions. *Environ. Sci. Technol.* **2022**, *56*, 17531–17544. [CrossRef] [PubMed]
178. Evident Scientific. Scrap Recycling with XRF—Sort More, Sort Faster, and Increase Your Profits. Available online: https://www.olympus-ims.com/en/applications/scrap-recycling-xrf-sort/ (accessed on 5 January 2025).
179. Bezati, F.; Froelich, D.; Massardier, V.; Maris, E. Addition of X-Ray Fluorescent Tracers into Polymers, New Technology for Automatic Sorting of Plastics: Proposal for Selecting Some Relevant Tracers. *Resour. Conserv. Recycl.* **2011**, *55*, 1214–1221. [CrossRef]
180. Larder, R.R.; Hatton, F.L. Enabling the Polymer Circular Economy: Innovations in Photoluminescent Labeling of Plastic Waste for Enhanced Sorting. *ACS Polym. Au* **2022**, *2023*, 182–201. [CrossRef] [PubMed]
181. Tsuchimoto, I.; Kajikawa, Y. Recycling of Plastic Waste: A Systematic Review Using Bibliometric Analysis. *Sustainability* **2022**, *14*, 16340. [CrossRef]
182. Nanda, S.; Berruti, F. Municipal Solid Waste Management and Landfilling Technologies: A Review. *Environ. Chem. Lett.* **2021**, *19*, 1433–1456. [CrossRef]
183. D'Adamo, I.; Gastaldi, M.; Rosa, P. Recycling of End-of-Life Vehicles: Assessing Trends and Performances in Europe. *Technol. Forecast. Soc. Change* **2020**, *152*, 119887. [CrossRef]
184. Khan, A.H.; López-Maldonado, E.A.; Alam, S.S.; Khan, N.A.; López, J.R.L.; Herrera, P.F.M.; Abutaleb, A.; Ahmed, S.; Singh, L. Municipal Solid Waste Generation and the Current State of Waste-to-Energy Potential: State of Art Review. *Energy Convers. Manag.* **2022**, *267*, 115905. [CrossRef]
185. Fitzgerald, G.C. Pre-Processing and Treatment of Municipal Solid Waste (MSW) Prior to Incineration. In *Waste to Energy Conversion Technology*; Woodhead Publishing: Cambridge, UK, 2013; pp. 55–71. [CrossRef]
186. Raj, T.; Sompura, S.; Chandrasekhar, K.; Singh, S.K.; Pandey, S.; Singh, L.K.; Rajput, M.S.; Kumar, D.; Bhatia, S.K.; Patel, A.K.; et al. Technology Development and Challenges for the Transformation of Municipal Solid Waste into Sustainable Energy Production. *Biomass Bioenergy* **2023**, *178*, 106965. [CrossRef]
187. Hoang, Q.N.; Vanierschot, M.; Blondeau, J.; Croymans, T.; Pittoors, R.; Van Caneghem, J. Review of Numerical Studies on Thermal Treatment of Municipal Solid Waste in Packed Bed Combustion. *Fuel Commun.* **2021**, *7*, 100013. [CrossRef]
188. Lindfors, C.; Elliott, D.C.; Prins, W.; Oasmaa, A.; Lehtonen, J. Co-Processing of Biocrudes in Oil Refineries. *Energy Fuels* **2023**, *37*, 799–804. [CrossRef]
189. Małgorzata, H.; Andrzej, B. Predicting Fuel Properties of Torrefied Refuse-Derived Fuel Using Experimental and Regression Modeling. *Fuel* **2026**, *405*, 136481. [CrossRef]
190. Voicu, G.; Lazea, M.; Constantin, G.A.; Stefan, E.M.; Munteanu, M.G. Finite Element Analysis of the Compaction Plate from a Garbage Truck. *E3S Web Conf.* **2020**, *180*, 04006. [CrossRef]
191. Pulat, H.F.; Yukselen-Aksoy, Y. Compaction Behavior of Synthetic and Natural MSW Samples in Different Compositions. *Waste Manag. Res.* **2013**, *31*, 1255–1261. [CrossRef] [PubMed]
192. Tihin, G.L.; Mo, K.H.; Onn, C.C.; Ong, H.C.; Taufiq-Yap, Y.H.; Lee, H.V. Overview of Municipal Solid Wastes-Derived Refuse-Derived Fuels for Cement Co-Processing. *Alex. Eng. J.* **2023**, *84*, 153–174. [CrossRef]
193. Yeh, A.I.; Huang, Y.C.; Chen, S.H. Effect of Particle Size on the Rate of Enzymatic Hydrolysis of Cellulose. *Carbohydr. Polym.* **2010**, *79*, 192–199. [CrossRef]
194. Luo, S.; Xiao, B.; Hu, Z.; Liu, S. Effect of Particle Size on Pyrolysis of Single-Component Municipal Solid Waste in Fixed Bed Reactor. *Int. J. Hydrogen Energy* **2010**, *35*, 93–97. [CrossRef]

195. Bereziuk, O.V.; Lemeshev, M.S.; Bogachuk, V.V.; Akselrod, R.B.; Vinnichuk, A.P.; Smolarz, A.; Arshidinova, M.; Kulakova, O. Increasing the Efficiency of Municipal Solid Waste Pre-Processing Technology to Reduce Its Water Permeability. In *Biomass as Raw Material for the Production of Biofuels and Chemicals*; Routledge: London, UK, 2021; pp. 33–41. [CrossRef]
196. Pavankumar, E.; Baskaran, S.; Prithivirajan, R.; Vinoth Kumar, S.; Karpagaraj, A. Development of Multi-Functioning Organic Waste Shredding Machine for Natural Compost. In *Advances in Industrial Automation and Smart Manufacturing; Lecture Notes in Mechanical Engineering*; Springer Science and Business Media Deutschland GmbH: Berlin/Heidelberg, Germany, 2021; Volume 23, pp. 1043–1055.
197. Saravacos, G.; Kostaropoulos, A.E. Mechanical Processing Equipment. In *Handbook of Food Processing Equipment*; Food Engineering Series; Springer: Cham, Switzerland, 2016; pp. 149–232. [CrossRef]
198. Almulla, L.; Thomas, B.M.; Jallow, M.F.A.; Al-Roumi, A.; Devi, Y.; Jacob, J. Rotary Drum Composting of Organic School Wastes and Compost Valorization. *Sustainability* **2024**, *16*, 2428. [CrossRef]
199. Zhu, B.; Gikas, P.; Zhang, R.; Lord, J.; Jenkins, B.; Li, X. Characteristics and Biogas Production Potential of Municipal Solid Wastes Pretreated with a Rotary Drum Reactor. *Bioresour. Technol.* **2009**, *100*, 1122–1129. [CrossRef] [PubMed]
200. Mazzei, H.G.; Specchia, S. Latest Insights on Technologies for the Treatment of Solid Medical Waste: A Review. *J. Environ. Chem. Eng.* **2023**, *11*, 109309. [CrossRef]
201. Khan, M.A.; Hameed, B.H.; Siddiqui, M.R.; Alothman, Z.A.; Alsohaimi, I.H. Hydrothermal Conversion of Food Waste to Carbonaceous Solid Fuel—A Review of Recent Developments. *Foods* **2022**, *11*, 4036. [CrossRef] [PubMed]
202. Roy, R.; Hewetson, B.; Schooff, B.; Bandi, S.; LaTour, P.; Iverson, B.D.; Fry, A. Steam Explosion Treated Biomass as a Renewable Fuel Source: A Review from Collection to Combustion. *Fuel* **2024**, *378*, 132883. [CrossRef]
203. Gao, W.; Zhang, Y.; Mo, A.; Jiang, J.; Liang, Y.; Cao, X.; He, D. Removal of Microplastics in Water: Technology Progress and Green Strategies. *Green Anal. Chem.* **2022**, *3*, 100042. [CrossRef]
204. Smith, Z.; Isaac, B.; Tumuluru, J.S.; Yancey, N. Grinding and Pelleting Characteristics of Municipal Solid Waste Fractions. *Energies* **2023**, *17*, 29. [CrossRef]
205. Shapouri, M.; Hassanzadeh Moghimi, O. RDF Production from Municipal Wastes (Case Study: Babol City). *Environ. Energy Econ. Res.* **2018**, *2*, 137–144. [CrossRef]
206. Brown, R.M.; Hoover, A.N.; Klinger, J.L.; Wahlen, B.D.; Hartley, D.; Lee, H.; Thompson, V.S. Decontamination of Mixed Paper and Plastic Municipal Solid Waste Increases Low and High Temperature Conversion Yields. *Front. Energy Res.* **2022**, *10*, 834832. [CrossRef]
207. Genuino, H.C.; Ruiz, M.P.; Heeres, H.J.; Kersten, S.R.A. Pyrolysis of Mixed Plastic Waste (DKR-350): Effect of Washing Pre-Treatment and Fate of Chlorine. *Fuel Process. Technol.* **2022**, *233*, 107304. [CrossRef]
208. Zhou, H.; Meng, A.; Long, Y.; Li, Q.; Zhang, Y. An Overview of Characteristics of Municipal Solid Waste Fuel in China: Physical, Chemical Composition and Heating Value. *Renew. Sustain. Energy Rev.* **2014**, *36*, 107–122. [CrossRef]
209. Mendes, P.; Santos, A.C.; Nunes, L.M.; Teixeira, M.R. Evaluating Municipal Solid Waste Management Performance in Regions with Strong Seasonal Variability. *Ecol. Indic.* **2013**, *30*, 170–177. [CrossRef]
210. Yi, S.; Yoo, K.Y.; Hanaki, K. Characteristics of MSW and Heat Energy Recovery between Residential and Commercial Areas in Seoul. *Waste Manag.* **2011**, *31*, 595–602. [CrossRef] [PubMed]
211. Prajapati, P.; Varjani, S.; Singhania, R.R.; Patel, A.K.; Awasthi, M.K.; Sindhu, R.; Zhang, Z.; Binod, P.; Awasthi, S.K.; Chaturvedi, P. Critical Review on Technological Advancements for Effective Waste Management of Municipal Solid Waste—Updates and Way Forward. *Environ. Technol. Innov.* **2021**, *23*, 101749. [CrossRef]
212. Ochieng, R.; Gebremedhin, A.; Sarker, S. Integration of Waste to Bioenergy Conversion Systems: A Critical Review. *Energies* **2022**, *15*, 2697. [CrossRef]
213. Olawade, D.B.; Fapohunda, O.; Wada, O.Z.; Usman, S.O.; Ige, A.O.; Ajisafe, O.; Oladapo, B.I. Smart Waste Management: A Paradigm Shift Enabled by Artificial Intelligence. *Waste Manag. Bull.* **2024**, *2*, 244–263. [CrossRef]
214. Chintagunta, A.D.; Jacob, S.; Banerjee, R. Integrated Bioethanol and Biomanure Production from Potato Waste. *Waste Manag.* **2016**, *49*, 320–325. [CrossRef] [PubMed]
215. Nishimura, H.; Tan, L.; Sun, Z.Y.; Tang, Y.Q.; Kida, K.; Morimura, S. Efficient Production of Ethanol from Waste Paper and the Biochemical Methane Potential of Stillage Eluted from Ethanol Fermentation. *Waste Manag.* **2016**, *48*, 644–651. [CrossRef] [PubMed]
216. Blank, L.M.; Narancic, T.; Mampel, J.; Tiso, T.; O'Connor, K. Biotechnological Upcycling of Plastic Waste and Other Non-Conventional Feedstocks in a Circular Economy. *Curr. Opin. Biotechnol.* **2020**, *62*, 212–219. [CrossRef] [PubMed]
217. Bayard, R.; Benbelkacem, H.; Gourdon, R.; Buffière, P. Characterization of Selected Municipal Solid Waste Components to Estimate Their Biodegradability. *J. Environ. Manag.* **2018**, *216*, 4–12. [CrossRef] [PubMed]
218. Werkneh, A.A. Biogas Impurities: Environmental and Health Implications, Removal Technologies and Future Perspectives. *Heliyon* **2022**, *8*, e10929. [CrossRef] [PubMed]

219. Nandhini, R.; Berslin, D.; Sivaprakash, B.; Rajamohan, N.; Vo, D.V.N. Thermochemical Conversion of Municipal Solid Waste into Energy and Hydrogen: A Review. *Environ. Chem. Lett.* **2022**, *20*, 1645–1669. [CrossRef] [PubMed]
220. Wang, B.; Gupta, R.; Bei, L.; Wan, Q.; Sun, L. A Review on Gasification of Municipal Solid Waste (MSW): Syngas Production, Tar Formation, Mineral Transformation and Industrial Challenges. *Int. J. Hydrogen Energy* **2023**, *48*, 26676–26706. [CrossRef]
221. Yang, Y.; Liew, R.K.; Tamothran, A.M.; Foong, S.Y.; Yek, P.N.Y.; Chia, P.W.; Van Tran, T.; Peng, W.; Lam, S.S. Gasification of Refuse-Derived Fuel from Municipal Solid Waste for Energy Production: A Review. *Environ. Chem. Lett.* **2021**, *19*, 2127–2140. [CrossRef] [PubMed]
222. Yaashikaa, P.R.; Kumar, P.S.; Saravanan, A.; Varjani, S.; Ramamurthy, R. Bioconversion of Municipal Solid Waste into Bio-Based Products: A Review on Valorisation and Sustainable Approach for Circular Bioeconomy. *Sci. Total Environ.* **2020**, *748*, 141312. [CrossRef] [PubMed]
223. Elektorowicz, M.; Habibi, S.; Chifrina, R. Effect of Electrical Potential on the Electro-Demulsification of Oily Sludge. *J. Colloid Interface Sci.* **2006**, *295*, 535–541. [CrossRef] [PubMed]
224. Rao, R.; Basak, N. Development of Novel Strategies for Higher Fermentative Biohydrogen Recovery along with Novel Metabolites from Organic Wastes: The Present State of the Art. *Biotechnol. Appl. Biochem.* **2021**, *68*, 421–444. [CrossRef] [PubMed]
225. Rao, R.; Basak, N. Sequential Dark-Photo Batch Fermentation and Kinetic Modelling for Biohydrogen Production Using Cheese Whey as a Feedstock. *Appl. Biochem. Biotechnol.* **2022**, *194*, 3930–3960. [CrossRef] [PubMed]
226. Rao, R.; Basak, N. Process Optimization and Mathematical Modelling of Photo-Fermentative Hydrogen Production from Dark Fermentative Cheese Whey Effluent by Rhodobacter Sphaeroides O.U.001 in 2-L Cylindrical Bioreactor. *Biomass Convers. Biorefin.* **2023**, *13*, 3929–3952. [CrossRef]
227. Opatokun, S.A.; Kan, T.; Al Shoaibi, A.; Srinivasakannan, C.; Strezov, V. Characterization of Food Waste and Its Digestate as Feedstock for Thermochemical Processing. *Energy Fuels* **2016**, *30*, 1589–1597. [CrossRef]
228. Eboibi, B.E.; Lewis, D.M.; Ashman, P.J.; Chinnasamy, S. Integrating Anaerobic Digestion and Hydrothermal Liquefaction for Renewable Energy Production: An Experimental Investigation. *Environ. Prog. Sustain. Energy* **2015**, *34*, 1662–1673. [CrossRef]
229. Wang, D.; Tang, Y.-T.; He, J.; Yang, F.; Robinson, D. Generalized Models to Predict the Lower Heating Value (LHV) of Municipal Solid Waste (MSW). *Energy* **2021**, *216*, 119279. [CrossRef]
230. Zhou, H.; Meng, A.; Long, Y.; Li, Q.; Zhang, Y. Classification and Comparison of Municipal Solid Waste Based on Thermochemical Characteristics. *J. Air Waste Manag. Assoc.* **2014**, *64*, 597–616. [CrossRef] [PubMed]
231. Sørum, L.; Grønli, M.G.; Hustad, J.E. Pyrolysis Characteristics and Kinetics of Municipal Solid Wastes. *Fuel* **2001**, *80*, 1217–1227. [CrossRef]
232. US DOE EERE. Waste-to-Energy from Municipal Solid Wastes. Available online: https://www.energy.gov/eere/bioenergy/articles/waste-energy-municipal-solid-wastes-report (accessed on 27 October 2024).
233. Ding, L.; Cheng, M.H.; Lin, Y.; Lin, K.T.; Sale, K.L.; Sun, N.; Donohoe, B.S.; Ray, A.E.; Li, C. Understanding the Impacts of Inorganic Species in Woody Biomass for Preprocessing and Pyrolysis—A Review. *Energy* **2025**, *322*, 135697. [CrossRef]
234. Gomes, H.I.; Mayes, W.M.; Rogerson, M.; Stewart, D.I.; Burked, I.T. Alkaline Residues and the Environment: A Review of Impacts, Management Practices and Opportunities. *J. Clean. Prod.* **2016**, *112*, 3571–3582. [CrossRef]
235. Zhao, D.; Wang, Y.; Wang, G.; Han, W.; Liu, H.; Wang, H.; Liu, H.; Guo, S. Exploring the Mechanism of Alkali Metal K-Catalyzed Biomass Char Gasification Using in-Situ DRIFTS and Molecular Simulation. *Chem. Eng. J.* **2024**, *500*, 157367. [CrossRef]
236. Wongmat, Y.; Wagner, D.R.; Wongmat, Y.; Wagner, D.R. Effect of Potassium Salts on Biochar Pyrolysis. *Energies* **2022**, *15*, 5779. [CrossRef]
237. Pienihäkkinen, E.; Lindfors, C.; Ohra-Aho, T.; Oasmaa, A. Improving Fast Pyrolysis Bio-Oil Yield and Quality by Alkali Removal from Feedstock. *Energy Fuels* **2022**, *36*, 3654–3664. [CrossRef] [PubMed]
238. Zhang, S.; Ma, J.; Jiang, F. Monitoring Street-Level Improper Dumpsites via a Multi-Modal and LLM-Based Framework. *Resour. Conserv. Recycl.* **2025**, *218*, 108227. [CrossRef]
239. Pham, P.T.H.; Pham, C.Q.; Dam, T.T.; Nguyen, Q.A.; Nguyen, T.M. A Comprehensive Review of Catalyst Deactivation and Regeneration in Heavy Oil Hydroprocessing. *Fuel Process. Technol.* **2025**, *267*, 108170. [CrossRef]
240. Shahabuddin, M.; Alam, M.T.; Krishna, B.B.; Bhaskar, T.; Perkins, G. A Review on the Production of Renewable Aviation Fuels from the Gasification of Biomass and Residual Wastes. *Bioresour. Technol.* **2020**, *312*, 123596. [CrossRef] [PubMed]
241. Zhang, L.; Oladejo, J.; Dawodu, A.; Yang, L.; Xiao, Y. Sustainable Jet Fuel from Municipal Solid Waste–Investigation of Carbon Negativity and Affordability Claims. *Resour. Conserv. Recycl.* **2024**, *210*, 107819. [CrossRef]
242. Rockey, J.; Venkataraman, V. Technology Developers Report CTL Jet Fuel Project. Available online: https://www.nationalcarboncapturecenter.com/wp-content/uploads/2021/01/Southern-Research-Coal-to-Liquid-Jet-Fuel-Project-2017.pdf (accessed on 5 October 2024).
243. Fulcrum BioEnergy, Inc. Available online: https://www.prnewswire.com/news-releases/fulcrum-targets-northwest-indiana-for-the-location-of-its-next-waste-to-fuel-plant-300765266.html (accessed on 5 October 2024).

244. Velocys, British Airways & Shell. Available online: https://velocys.com/2019/08/20/plans-submitted-for-the-first-waste-to-jet-fuel-plant-in-the-uk-and-europe/ (accessed on 5 October 2024).
245. Green Car Congress Altalto Waste-to-Jet Fuel Plant Advances in UK; BA, Shell, Velocys. Available online: https://www.greencarcongress.com/2019/08/20190822-altalto.html (accessed on 5 October 2024).
246. Montoya Sánchez, N.; Link, F.; Chauhan, G.; Halmenschlager, C.; El-Sayed, H.E.M.; Sehdev, R.; Lehoux, R.; de Klerk, A. Conversion of Waste to Sustainable Aviation Fuel via Fischer–Tropsch Synthesis: Front-End Design Decisions. *Energy Sci. Eng.* **2022**, *10*, 1763–1789. [CrossRef]
247. Agwe, T.M.; Twesigye-omwe, M.N.; Ukundimana, Z.; Rotimi, D.; Gupta, S. Effects of Seasonal Variations of the Physio-Chemical Properties of Municipal Solid Waste on Effective Materials and Resources Recovery. *Sci. Rep.* **2025**, *15*, 4548. [CrossRef] [PubMed]
248. Vrabie, C.; Vrabie, C. Converting Municipal Waste to Energy through the Biomass Chain, a Key Technology for Environmental Issues in (Smart) Cities. *Sustainability* **2021**, *13*, 4633. [CrossRef]
249. Chang, C.Y.; Wang, C.F.; Mui, D.T.; Cheng, M.T.; Chiang, H.L. Characteristics of Elements in Waste Ashes from a Solid Waste Incinerator in Taiwan. *J. Hazard. Mater.* **2009**, *165*, 766–773. [CrossRef] [PubMed]
250. Puri, L.; Hu, Y.; Naterer, G. Critical Review of the Role of Ash Content and Composition in Biomass Pyrolysis. *Front. Fuels* **2024**, *2*, 1378361. [CrossRef]
251. Lehmusto, J.; Tesfaye, F.; Karlström, O.; Hupa, L. Ashes from Challenging Fuels in the Circular Economy. *Waste Manag.* **2024**, *177*, 211–231. [CrossRef] [PubMed]
252. Ng, K.S.; Farooq, D.; Yang, A. Global Biorenewable Development Strategies for Sustainable Aviation Fuel Production. *Renew. Sustain. Energy Rev.* **2021**, *150*, 111502. [CrossRef]
253. Nguyen, N.; Tyner, W.E. Assessment of the Feasibility of the Production of Alternative Jet Fuel and Diesel Using Catalytic Hydrothermolysis Technology: A Stochastic Techno-Economic Analysis. *Biofuels Bioprod. Biorefining* **2022**, *16*, 91–104. [CrossRef]
254. Scown, C.D.; Baral, N.R.; Tanjore, D.; Rapp, V. Matching Diverse Feedstocks to Conversion Processes for the Future Bioeconomy. *Curr. Opin. Biotechnol.* **2023**, *84*, 103017. [CrossRef] [PubMed]
255. Thiyagarajan, R.; Rao, R.; Salas, M.; Haque, N.; Sarker, A.; Kumar, R.; Tripathy, A.; Srinivasan, V.; Wang, Y.; Yarbrough, J.; et al. Techno-Economics of Hydrocarbon Fuel Production and Recyclables Recovery from Landfill-Destined Municipal Solid Waste: AI-Enhanced Materials Recovery Facility Design. *J. Clean. Prod.* **2025**, *525*, 146643. [CrossRef]
256. Zhang, Q.; Dor, L.; Yang, W.; Blasiak, W. Eulerian Model for Municipal Solid Waste Gasification in a Fixed-Bed Plasma Gasification Melting Reactor. *Energy Fuels* **2011**, *25*, 4129–4137. [CrossRef]
257. Veksha, A.; Giannis, A.; Yuan, G.; Tng, J.; Chan, W.P.; Chang, V.W.C.; Lisak, G.; Lim, T.T. Distribution and Modeling of Tar Compounds Produced during Downdraft Gasification of Municipal Solid Waste. *Renew. Energy* **2019**, *136*, 1294–1303. [CrossRef]
258. Hu, M.; Guo, D.; Ma, C.; Hu, Z.; Zhang, B.; Xiao, B.; Luo, S.; Wang, J. Hydrogen-Rich Gas Production by the Gasification of Wet MSW (Municipal Solid Waste) Coupled with Carbon Dioxide Capture. *Energy* **2015**, *90*, 857–863. [CrossRef]
259. Jayanarasimhan, A.; Pathak, R.M.; Shivapuji, A.M.; Rao, L. Tar Formation in Gasification Systems: A Holistic Review of Remediation Approaches and Removal Methods. *ACS Omega* **2024**, *9*, 2060–2079. [CrossRef] [PubMed]
260. Ungureanu, N.; Vlăduț, N.-V.; Biriș, S.-Ștefan; Ionescu, M.; Gheorghiță, N.-E. Municipal Solid Waste Gasification: Technologies, Process Parameters, and Sustainable Valorization of By-Products in a Circular Economy. *Sustainability* **2025**, *17*, 6704. [CrossRef]
261. Nagar, V.; Kaushal, R. A Review of Recent Advancement in Plasma Gasification: A Promising Solution for Waste Management and Energy Production. *Int. J. Hydrogen Energy* **2024**, *77*, 405–419. [CrossRef]
262. Saputro, B.A.; Dafiqurrohman, H.; Supriatna, N.K.; Yan, M.; Aji Nugroho, R.A.; Wang, W.-C.; Surjosatyo, A. Steam Gasification of Municipal Solid Waste (MSW) Using Fe2O3/Al2O3, and Zeolite Catalysts in a Fixed-Bed Gasifier for Hydrogen-Rich Syngas Production. *Int. J. Hydrogen Energy* **2025**, *158*, 150446. [CrossRef]
263. Kun, U.H.; Ksepko, E. Advancing Municipal Solid Waste Management Through Gasification Technology. *Processes* **2025**, *13*, 2000. [CrossRef]
264. Koritár, M.; Haydary, J. Reduction of Tar, Sulfur, Chlorine and CO2 in Syngas Produced by Gasification of Refuse-Derived Fuel Pellets. *Sci. Rep.* **2025**, *15*, 18446. [CrossRef] [PubMed]
265. Salem, K.S.; Kasera, N.K.; Rahman, M.A.; Jameel, H.; Habibi, Y.; Eichhorn, S.J.; French, A.D.; Pal, L.; Lucia, L.A. Comparison and Assessment of Methods for Cellulose Crystallinity Determination. *Chem. Soc. Rev.* **2023**, *52*, 6417–6446. [CrossRef] [PubMed]
266. Rao, R.; Pena, L.; Haque, N.; Salas, M.; Bera, S.; Mittal, A.; Yarbrough, J.; Pal, L. Upconversion of Non-Recycled MSW Paper Fractions into Biochar via Slow Pyrolysis and Life Cycle Analysis: Pathways to Net Negative GHG Emission. *J. Environ. Manag.* **2026**, *397*, 128341. [CrossRef]
267. US EPA. Landfill Methane Outreach Program Frequent Questions About Landfill Gas. Available online: https://www.epa.gov/lmop/frequent-questions-about-landfill-gas (accessed on 5 August 2025).
268. Salehiyoun, A.R.; Zilouei, H.; Safari, M.; Di Maria, F.; Samadi, S.H.; Norouzi, O. An Investigation for Improving Dry Anaerobic Digestion of Municipal Solid Wastes by Adding Biochar Derived from Gasification of Wood Pellets. *Renew. Energy* **2022**, *186*, 1–9. [CrossRef]

269. Singh, E.; Kumar, A.; Mishra, R.; You, S.; Singh, L.; Kumar, S.; Kumar, R. Pyrolysis of Waste Biomass and Plastics for Production of Biochar and Its Use for Removal of Heavy Metals from Aqueous Solution. *Bioresour. Technol.* **2021**, *320*, 124278. [CrossRef] [PubMed]
270. Xu, X.; Hu, X.; Ding, Z.; Chen, Y.; Gao, B. Waste-Art-Paper Biochar as an Effective Sorbent for Recovery of Aqueous Pb(II) into Value-Added PbO Nanoparticles. *Chem. Eng. J.* **2017**, *308*, 863–871. [CrossRef]
271. Saleem, H.; Ahmad, M.; Rashid, J.; Ahmad, M.; Al-Wabel, M.I.; Amin, M. Carbon Potentials of Different Biochars Derived from Municipal Solid Waste in a Saline Soil. *Pedosphere* **2022**, *32*, 283–293. [CrossRef]
272. Ghorbannezhad, P.; Soleymani, N.; Abbasi, M. Co-Pyrolysis of Municipal and Horticultural Wastes for Enhanced Biochar and Bio-Oil Production: A Response Surface Methodology Approach. *Fuel* **2023**, *350*, 128795. [CrossRef]
273. Wang, Z.; Burra, K.G.; Lei, T.; Gupta, A.K. Co-Pyrolysis of Waste Plastic and Solid Biomass for Synergistic Production of Biofuels and Chemicals-A Review. *Prog. Energy Combust. Sci.* **2021**, *84*, 100899. [CrossRef]
274. Razzak, S.A. Municipal Solid and Plastic Waste Derived High-Performance Biochar Production: A Comprehensive Review. *J. Anal. Appl. Pyrolysis* **2024**, *181*, 106622. [CrossRef]
275. Gao, N.; Humphrey Milandile, M.; Tariq Sipra, A.; Su, S.; Miskolczi, N.; Quan, C. Co-Pyrolysis of Municipal Solid Waste (MSW) and Biomass with Co/Sludge Fly Ash Catalyst. *Fuel* **2022**, *322*, 124127. [CrossRef]
276. Zhang, S.; Gu, W.; Geng, Z.; Bai, J.; Dong, B.; Zhao, J.; Zhuang, X.; Shih, K. Immobilization of Heavy Metals in Biochar by Co-Pyrolysis of Sludge and CaSiO3. *J. Environ. Manag.* **2023**, *326*, 116635. [CrossRef]
277. Mohamed, B.A.; Ruan, R.; Bilal, M.; Khan, N.A.; Awasthi, M.K.; Amer, M.A.; Leng, L.; Hamouda, M.A.; Vo, D.N.; Li, J. Co-Pyrolysis of Sewage Sludge and Biomass for Stabilizing Heavy Metals and Reducing Biochar Toxicity: A Review. *Environ. Chem. Lett.* **2023**, *21*, 1231–1250. [CrossRef]
278. Zhang, H.; Yu, H.; Sun, W.; Lin, S.; Zhang, C. Beneficiation of Silver and Silver-Bearing Lead–Zinc Ores: A Review. *Miner. Eng.* **2024**, *208*, 108608. [CrossRef]
279. Vasileiadou, A. From Organic Wastes to Bioenergy, Biofuels, and Value-Added Products for Urban Sustainability and Circular Economy: A Review. *Urban Sci.* **2024**, *8*, 121. [CrossRef]
280. Bhatt, A.; Tao, L.; Zhang, Y.; Smolinski, S.; Tan, E.; Klein, B.; Wiatrowski, M.; Quiroz, D. SAF: A Promising Approach to Meet Growing Jet Fuel Demand. *Appl. Energy* **2026**, *415*, 127894. [CrossRef]
281. Park, M.J.; Yun, S.; Jeong, D.W.; Won, W. Upcycling Municipal Solid Waste: Scenario-Based Techno-Economic Evaluation and Life Cycle Assessment. *Energy* **2025**, *329*, 136786. [CrossRef]
282. Bozorgirad, M.A.; Zhang, H.; Haapala, K.R.; Murthy, G.S. Environmental Impact and Cost Assessment of Incineration and Ethanol Production as Municipal Solid Waste Management Strategies. *Int. J. Life Cycle Assess.* **2013**, *18*, 1502–1512. [CrossRef]
283. Hafyan, R.H.; Mohanarajan, J.; Uppal, M.; Kumar, V.; Narisetty, V.; Maity, S.K.; Sadhukhan, J.; Gadkari, S. Integrated Biorefinery for Bioethanol and Succinic Acid Co-Production from Bread Waste: Techno-Economic Feasibility and Life Cycle Assessment. *Energy Convers. Manag.* **2024**, *301*, 118033. [CrossRef]
284. Brandt, K.L.; Martinez-Valencia, L.; Wolcott, M.P. Cumulative Impact of Federal and State Policy on Minimum Selling Price of Sustainable Aviation Fuel. *Front. Energy Res.* **2022**, *10*, 828789. [CrossRef]
285. Klimczyk, W.; Jasiński, R.; Niklas, J.; Siedlecki, M.; Ziółkowski, A. Sustainable Aviation Fuels: A Comprehensive Review of Production Pathways, Environmental Impacts, Lifecycle Assessment, and Certification Frameworks. *Energies* **2025**, *18*, 3705. [CrossRef]
286. Yang, F.; Yao, Y. Sustainable Aviation Fuel Pathways: Emissions, Costs and Uncertainty. *Resour. Conserv. Recycl.* **2025**, *215*, 108124. [CrossRef]
287. Tang, Y.; Dong, J.; Li, G.; Zheng, Y.; Chi, Y.; Nzihou, A.; Weiss-Hortala, E.; Ye, C. Environmental and Exergetic Life Cycle Assessment of Incineration- and Gasification-Based Waste to Energy Systems in China. *Energy* **2020**, *205*, 118002. [CrossRef]
288. Wang, H.; Wang, L.; Shahbazi, A. Life Cycle Assessment of Fast Pyrolysis of Municipal Solid Waste in North Carolina of USA. *J. Clean. Prod.* **2015**, *87*, 130–138. [CrossRef]
289. Li, Q.; Jin, Q. Holistic Comparison of Hydrothermal Carbonization versus Slow Pyrolysis for Biochar Production: Techno-Economic Analysis and Life Cycle Assessment. *ACS Sustain. Chem. Eng.* **2025**, *13*, 12382–12395. [CrossRef]
290. Rahman, K.F.; Abrar, M.F.; Tithi, S.S.; Kabir, K.B.; Kirtania, K. Life Cycle Assessment of Hydrothermal Carbonization of Municipal Solid Waste for Waste-to-Energy Generation. *J. Environ. Manag.* **2024**, *370*, 122850. [CrossRef]
291. Mahadevan Subramanya, S.; Savage, P.E.; Shi, R. Integrated Life Cycle Assessment and Techno-Economic Analysis for Hydrothermal Liquefaction of Carbonaceous Municipal Solid Waste with Variable Composition. *ACS Sustain. Chem. Eng.* **2026**, *14*, 57–71. [CrossRef]
292. Rahman, W.U.; Patel, M.; Kurian, V.; Kumar, A. A Comparative Techno-Economic Assessment of Fast Pyrolysis, Hydrothermal Liquefaction, and Intermediate Pyrolysis of Municipal Solid Waste for Liquid Transportation Fuels Production. *Energy Convers. Manag.* **2022**, *267*, 115877. [CrossRef]

293. Iaquaniello, G.; Centi, G.; Salladini, A.; Palo, E.; Perathoner, S.; Spadaccini, L. Waste-to-Methanol: Process and Economics Assessment. *Bioresour. Technol.* **2017**, *243*, 611–619. [CrossRef] [PubMed]
294. US EPA. Advancing Sustainable Materials Management: 2015 Fact Sheet. Available online: https://www.epa.gov/sites/default/files/2018-07/documents/2015_smm_msw_factsheet_07242018_fnl_508_002.pdf (accessed on 6 October 2024).
295. City of Phoenix Report Waste Characterization Study 2015. Available online: https://www.phoenix.gov/publicworkssite/Documents/WasteCharacterizationStudyCombined2014-15.pdf (accessed on 7 October 2024).
296. CDPHE. Colorado Department of Public Health and Environment—Solid Waste Management Data and Reports. Available online: https://cdphe.colorado.gov/hm/swreports (accessed on 30 December 2024).
297. CT DEEP. Connecticut Department of Energy and Environmental Protection (CT DEEP) Statewide Waste Characterization Study Final Report. Available online: https://portal.ct.gov/-/media/deep/waste_management_and_disposal/solid_waste_management_plan/cmmsfinal2015mswcharacterizationstudypdf.pdf (accessed on 21 February 2025).
298. Illinois EPA Waste Characterization Update-Final Report. Available online: https://illinoisrecycles.org/wp-content/uploads/2014/10/2015-Waste-Characterization-Update-FINAL.pdf (accessed on 27 October 2024).
299. VT ANR Vermont Waste Characterization Study 2018 Final Report. Available online: https://dec.vermont.gov/sites/dec/files/wmp/SolidWaste/Documents/2018-VT-Waste-Characterization.pdf (accessed on 21 February 2025).
300. Tennessee Department of Environment and Conservation 2015–2025 Solid Waste and Materials Management Plan. Available online: https://www.tn.gov/environment/program-areas/solid-waste/2015-2025-solid-waste-management-plan.html (accessed on 21 October 2024).
301. Vermont Department of Environmental Conservation 2023 Vermont Waste Composition Study. Available online: https://dec.vermont.gov/sites/dec/files/wmp/SolidWaste/Documents/2023-VT-Waste-Composition-Study.pdf (accessed on 21 October 2024).
302. Iowa Department of Natural Resources 2022 Iowa Statewide Material Characterization Study. Available online: http://www.scsengineers.com (accessed on 7 October 2024).
303. Pennsylvania Department of Environmental Protection Statewide Waste Composition Study. Available online: https://files.dep.state.pa.us/Waste/Recycling/RecyclingPortalFiles/Documents/wastecompositionstudy.pdf (accessed on 21 October 2024).

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.