



Proceedings Facile Microwave-Assisted Preparation of Hetero-Structured CuCo₂S₄/CuCo₂O₄ Nanoparticles Using Organic Agent of Thiourea ⁺

Mahdi Bahmani, Mina Imani and Azadeh Tadjarodi *

Department of Chemistry, Iran University of Science and Technology (IUST), 16846-13114 Tehran, Iran; mahdi73bhn@gmail.com (M.B.); imani.minaa@gmail.com (M.I.)

* Correspondence: tajarodi@iust.ac.ir

+ Presented at the 24th International Electronic Conference on Synthetic Organic Chemistry, 15 November–15 December 2020; Available online: https://ecsoc-24.sciforum.net/.

Abstract: Ultra-fast one-put microwave assisted strategy was introduced for the synthesis of heterostructured CuCo₂S₄/CuCo₂O₄ nanoparticles into a domestic microwave oven with the power of 900 W for 20 min. Thiourea as an organic agent was used as a sulfur source and driving agent to lead the solvent free combustion reaction to obtain this earth-abundant and low-cost mixed chalcogenide/oxide product. The structural and morphological specifications were studied in details using powder x-ray diffraction (XRD), Fourier transform infrared spectroscopy (FT–IR), scanning electron microscopy (SEM), and energy dispersion of x-ray spectrometry (EDX). The employed strategy relatively clarifies a new facile, rapid, and eco-friendly route to produce heterostructured nanocomposites for different functional purposes.

Keywords: microwave; nanoparticles; thiourea; chalcogenide

1. Introduction

Commonly, hetero-structured materials are defined as sandwich-like building blocks of two or more dissimilar layers with different features to create better functions than each component. One of the interesting heterostructures, is the growth of metal oxides in sulfide-based materials such as chalcogenides. Linnaeite compounds with a layered structure and general formula of AB₂X₄, where X is sulfur (S) or selenium (Se), A is divalent (Fe, Ni, Co, or Cu), and B is trivalent (Co, Ni), are promising candidates in the formation of the heterostructures' materials. These materials attracted lots of attention after their discovery by the Linnaeite group of the Swedish Carl Linnaeus in 1845, which caused more efforts in identification of more layered transition metal sulfides and also oxides. CuCo₂S₄ as a member of the carrollite compounds category is a notable material because of having low-cost, nontoxic, abundant, and available constituents [1,2]. On the other hand, metal oxide materials are widely available materials with crystalline structures and different applications in various fields, e.g., electrical/optical industry, redox reactions, catalyst production, agricultural industry, drug delivery/medicine, etc. They have significant properties in terms of efficiency, reactivity, selectivity, and cycle repeatability so that their combination with other materials such as CuCo₂S₄ can be led to prepare new multifunctional materials.

Various chemical methods were reported to synthesize variety of hetero-structured nanomaterials. The introduction of a simple, inexpensive, high efficiency, and rapid technique is notable to reduce production costs [3–5]. Amongst different techniques such as sol-gel, hydrothermal/solvothermal, and precipitation/calcination methods, microwave assisted-method is considered as a facile and rapid strategy to produce nanomaterials. [2–

Citation: Bahmani, M.; Imani, M.; Tadjarodi, A. Facile Microwave Assisted Preparation of Hetero-Structured CuCo₂S₄/CuCo₂O₄ Nanoparticles Using Organic Agent of Thiourea. *Chem. Proc.* **2021**, *3*, 60. https://doi.org/10.3390/ ecsoc-24-08347

Published: 14 November 2020

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/). 8]. As a matter of fact, the synthesis of hetero-structured CuCo₂S₄/CuCo₂O₄ nanoparticles using the ultra-fast solvent free microwave-assisted procedure has not yet been reported. Thiourea was selected as a suitable sulfur source and also driving agent in process due to its availability, cheapness, and ease of use.

2. Experimental

2.1. Materials and Method

All chemicals were purchased from Merck Co. and used without further purification. Metal sources with stoichiometric ratio in the presence of thiourea were mixed with each other, put into a microwave oven, and treated by microwave irradiation with a power of 900 W for 20 min. The obtained black powder was rinsed with distilled water and absolute ethanol for several times, dried at 70 °C, and then characterized.

2.2. Characterizations

X-ray diffraction (XRD) pattern was recorded by a DRON-8 powder diffractometer using Cu K α radiation (λ = 1.54060 Å). Fourier transform infrared (FT–IR) spectrum was obtained by a Shimadzu-8400S spectrometer in the range of 400–4000 cm⁻¹ using KBr pellets. Scanning electron microscopy (SEM) images and energy-dispersive x-ray were taken on a VEGA\\TESCAN S360 with gold coating.

3. Result and Discussion

The observed strong peaks at around 500–700 cm⁻¹ in the recorded FT-IR spectrum of the prepared product shown in Figure 1 can be related to the vibration frequencies of Co-O and Co-S and Cu-S bands of CuCo₂S₄/CuCo₂O₄ compound. The peaks at 3423 and 2360 cm⁻¹ can be assigned to the vibrations of the adsorbed H₂O and CO₂ molecules.


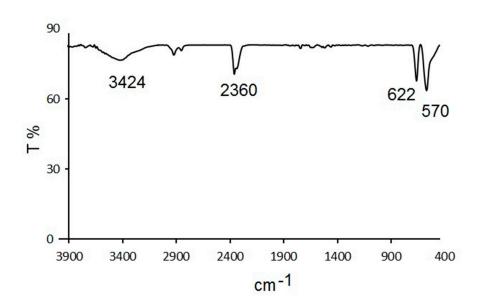


Figure 1. FT-IR spectrum of the synthesized nanoparticles.

Figure 2 exhibits XRD pattern of the prepared product. The appeared peaks at 16.8° , 31.19° , 35.50° , 38.76° , 41.58° , 47.17° , 50.23° , 54.91° , 59.24° , 62.21° , 64.02° , 65.13° , 68.70° , 71.13° , 75.10° , and 77.45° , which are in a good agreement with 111, 220, 311, 222, 004, 331, 422, 333, 440, 531, 620, 533, 622, 444, 711, 642, and 731 planes confirm the formation of cubic carrollite phase of CuCo₂S₄ (JCPDS card No. 75-1570). The diffraction lines at 2 Theta position of 31.36° , 36.95° , 38.94° , 45.06° , 56.02° , 59.60° , 65.70° , 69.00° , 77.55° are in a close

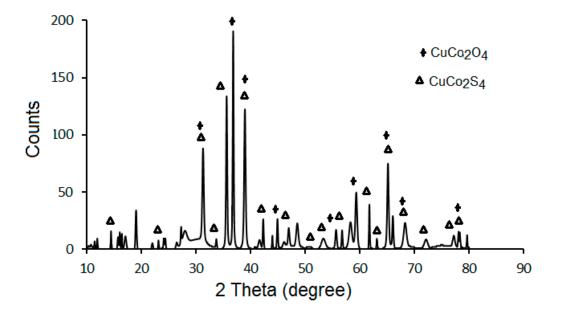

accordance with 220, 311, 222, 400, 422, 511, 440, 531, and 533 are related to cubic planes CuCo₂O₄ (JCPDS card No. 1-1155), which was formed alongside carrollite phase [6].

Figure 2. XRD pattern of the prepared CuCo₂S₄/CuCo₂O₄ nanoparticles.

The elemental EDX analysis shown in Figure 3 revealed the presence of Cu, Co, and S elements confirming the mentioned XRD data of the formation of layered building blocks of CuCo₂S₄/CuCo₂O₄.

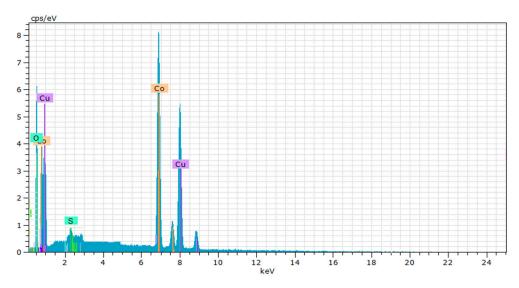


Figure 3. EDX analysis of the prepared product.

SEM images (Figure 4) recorded the resulting product depicted as a spherical particulate morphology with an average particle size of about 40 nm. It was observed that these fine nanoparticles were gathered together and formed a bundle-like texture consisting of particles. It can provide a large surface with more available active sites and efficiently contacts for various targets [7].

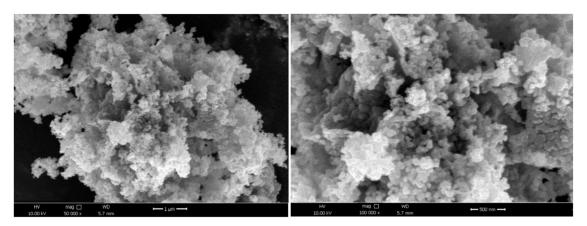


Figure 4. SEM images of resulting CuCo₂S₄/CuCo₂O₄ heterostructure.

4. Conclusions

In a summary, the hetero-structured CuCo₂S₄/CuCo₂O₄ nanoparticles were successfully synthesized by a rapid one-put microwave assisted strategy. This in situ treatment easily produced a suitable medium for the formation of heterostructure nanomaterial with a layered architecture. In fact, the microwave irradiation in the presence of proper chemicals created efficient interactions between reactants in solid state to reach this target. In addition, this procedure was carried out in a solid state without using any organic solvent, which can nominate it as an environment friendly method to prepare various nanomaterials.

Institutional Review Board Statement: This study did not involve humans or animals.

Informed Consent Statement: Not applicable.

Data Availability Statement: The necessary data has been given and this study does not report more data.

Acknowledgments: The financial support from IUST is gratefully acknowledged.

References

- Clark, A.H. Hypogene and supergene cobalt-copper sulfides, Carrizal Alto, Atacama, Chile. *Am. Mineral. J. Earth Planet. Mater.* 1974, 59, 302–306.
- Li, L.; Xu, J.; Ma, J.; Liu, Z.; Li, Y. A bimetallic sulfide CuCo₂S₄ with good synergistic effect was constructed to drive high performance photocatalytic hydrogen evolution. *J. Colloid Interface Sci.* 2019, 552, 17–26.
- 3. Zhu, Y.; Chen, X.; Zhou, W.; Xiang, K.; Hu, W.; Chen, H. Controllable preparation of highly uniform CuCo₂S₄ materials as battery electrode for energy storage with enhanced electrochemical performances. *Electrochim. Acta* **2017**, 249, 64–71.
- 4. Fan, L.Q.; Pan, F.; Tu, Q.M.; Gu, Y.; Huang, J.L.; Huang, Y.F.; Wu, J.H. Synthesis of CuCo₂S₄ nanosheet arrays on Ni foam as binder-free electrode for asymmetric supercapacitor. *Int. J. Hydrogen Energy* **2018**, *43*, 23372–23381.
- 5. Wang, F.; Zheng, J.; Li, G.; Ma, J.; Yang, C.; Wang, Q. Microwave synthesis of mesoporous CuCo₂S₄ nanoparticles for supercapacitor applications. *Mater. Chem. Phys.* **2018**, *215*, 121–126.
- Yang, Z.; Zhang, S.; Fu, Y.; Zheng, X.; Zheng, J. Shape-controlled synthesis of CuCo2S4 as highly-efficient electrocatalyst for nonenzymatic detection of H₂O₂. *Electrochim. Acta* 2017, 255, 23–30.
- Zequine, C.; Bhoyate, S.; Wang, F.; Li, X.; Siam, K.; Kahol, P.K.; Gupta, R.K. Effect of solvent for tailoring the nanomorphology of multinary CuCo₂S₄ for overall water splitting and energy storage. J. Alloys Compd. 2019, 784, 1–7.
- 8. Miao, F.; Li, X.; Tao, B.; Chu, P.K. Heterostructured Co(OH)₂ nanosheet-coated CuCo₂S₄ nanopencils on nickel foam for electrodes in high-performance supercapacitors. *Ionics* **2020**, *26*, 5241–5249.