Supplementary Material

Pseudospherical Bismuth Oxychloride-Modified Carbon Paste Electrode for the Determination of Quinine in Beverages

Tijana Mutić [1,*], Vesna Stanković [1], Miloš Ognjanović [2], Vladimir B. Nikolić [3], Guanyue Gao [4,5], Neso Sojic [6] and Dalibor Stanković [3]

[1] Institute of Chemistry, Technology and Metallurgy, National Institute of the Republic of Serbia, University of Belgrade, Studentski trg 12-16, 11000 Belgrade, Serbia; vesna.stankovic@ihtm.bg.ac.rs
[2] Vinča Institute of Nuclear Sciences, University of Belgrade, Mike Petrovića Alasa 12–14, 11000 Belgrade, Serbia; miloso@vin.bg.ac.rs
[3] Faculty of Chemistry, University of Belgrade, Studentski trg 12–16, 11000 Belgrade, Serbia; nikolicv@chem.bg.ac.rs (V.N.); dalibors@chem.bg.ac.rs (D.S.)
[4] Key Laboratory of Photochemical Conversion and Optoelectronic Materials, Technical Institute of Physics and Chemistry, Chinese Academy of Sciences, Beijing 100190, China; gaoguanyue@mail.ipc.ac.cn
[5] University of Chinese Academy of Sciences, Beijing 100049, China
[6] Institut des Sciences Moléculaires, University of Bordeaux, CNRS, Bordeaux INP, UMR 5255, 33607 Pessac, France; sojic@u-bordeaux.fr
* Correspondence: tijana.mutic@ihtm.bg.ac.rs

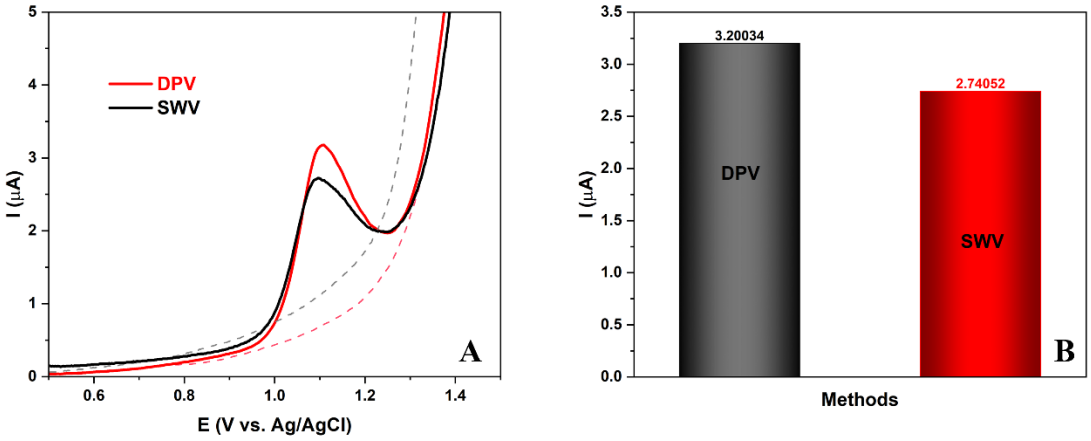

Figure S1. (A) Comparison between DPV and SWV methods for QN quantification with corresponding bar graph (B)

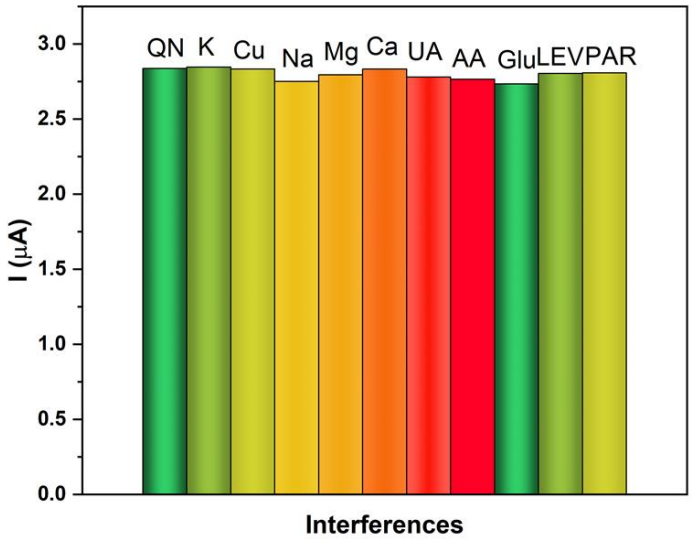

Figure S2. Bar graph of the peak currents of QN without and with the addition of potential interfering species