fibers

MDPI

Article

Surface modification of commingled flax/PP and flax/PLA fibres by silane or atmospheric argon plasma exposure to improve fibre-matrix adhesion in composites

Wiwat Pornwannachai [1,2], A. Richard Horrocks [1] and Baljinder K. Kandola [1,*]

[1] Institute for Materials Research and Innovation, University of Bolton, Deane Road, Bolton BL3 5AB, UK; wiwatpor@scg.com (W.P.); A.R.Horrocks@bolton.ac.uk (A.R.H.)
[2] SCG Chemicals Co.,Ltd., 1 Siam Cement Road., Bang Sue, Bangkok 10800, Thailand
* Correspondence: B.Kandola@bolton.ac.uk; Tel.: +44-120-490-3517

Supplementary Materials:

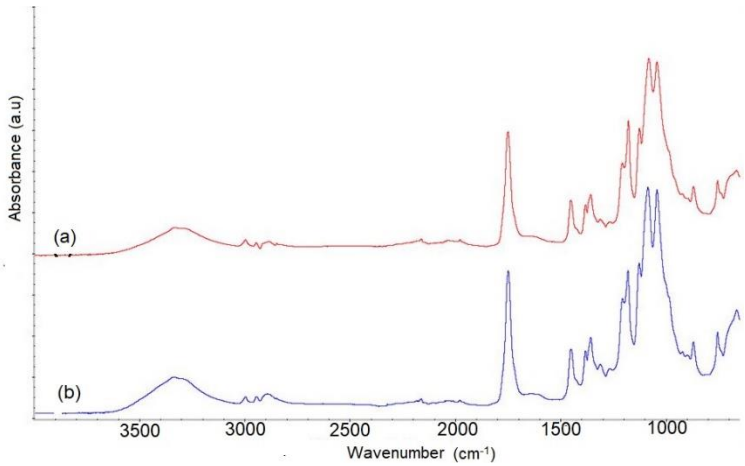


Figure S1: IR spectra of (a) Flax/PLA and (b) Pm-Flax/PLA (150 W) fabrics

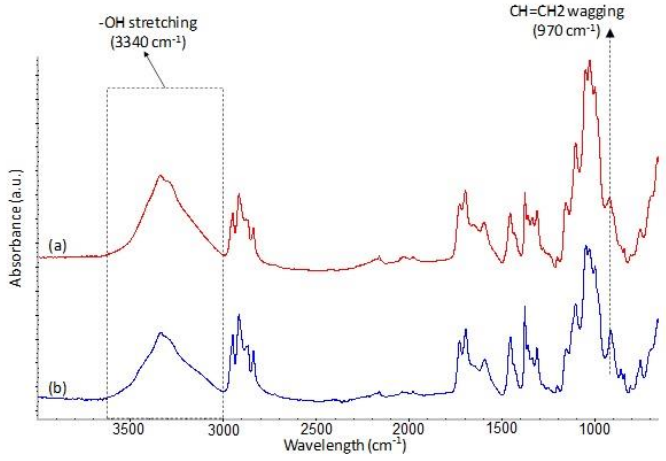


Figure S2: IR spectra of (a) FR-Si-Flax/PP and (b) FR-Pm-Si-Flax/PP (150 W) fabrics

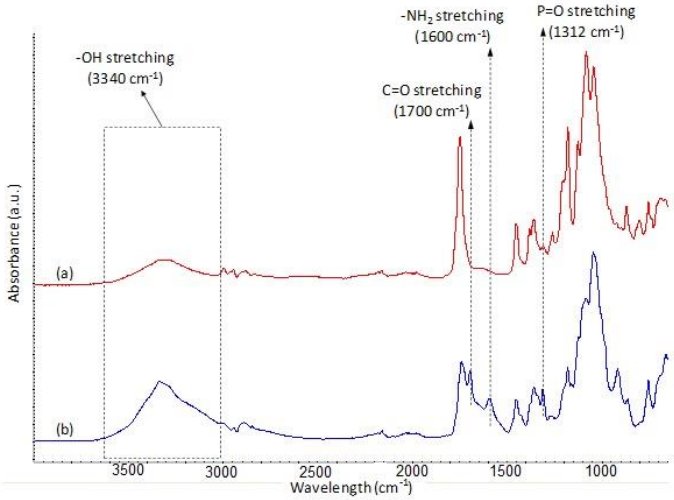


Figure S3: IR spectra of (a) Flax/PLA and (b) FR-Flax/PLA fabrics