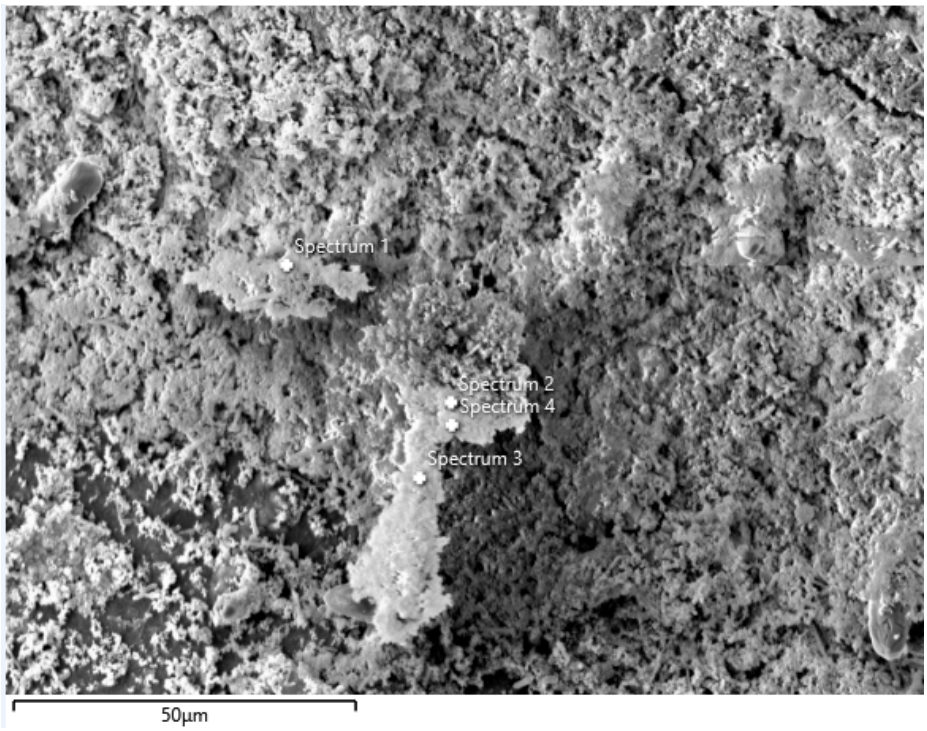
Supplementary Material

for

Durable Hydrophilic PVDF Hollow Fiber Membrane for Dissolved Organics Separation from High-Salinity Produced Water

Samuel Oppong [1,2], Zongjie He [2,3], Gabriela Torres Fernandez [1,2], Guoyin Zhang [2] and Jianjia Yu [2,4,*]

[1] Department of Civil and Environmental Engineering, New Mexico Institute of Mining and Technology, Socorro, NM 87801, USA; samuel.oppong@student.nmt.edu (S.O.); gabriela.torresfernandez@student.nmt.edu (G.T.F.)
[2] Petroleum Recovery Research Center, New Mexico Institute of Mining and Technology, Socorro, NM 87801, USA; zongjie.he@student.nmt.edu (Z.H.); guoyin.zhang@nmt.edu (G.Z.)
[3] Department of Materials Engineering, New Mexico Institute of Mining and Technology, Socorro, NM 87801, USA
[4] Department of Chemical Engineering, New Mexico Institute of Mining and Technology, Socorro, NM 87801, USA
* Correspondence: jianjia.yu@nmt.edu



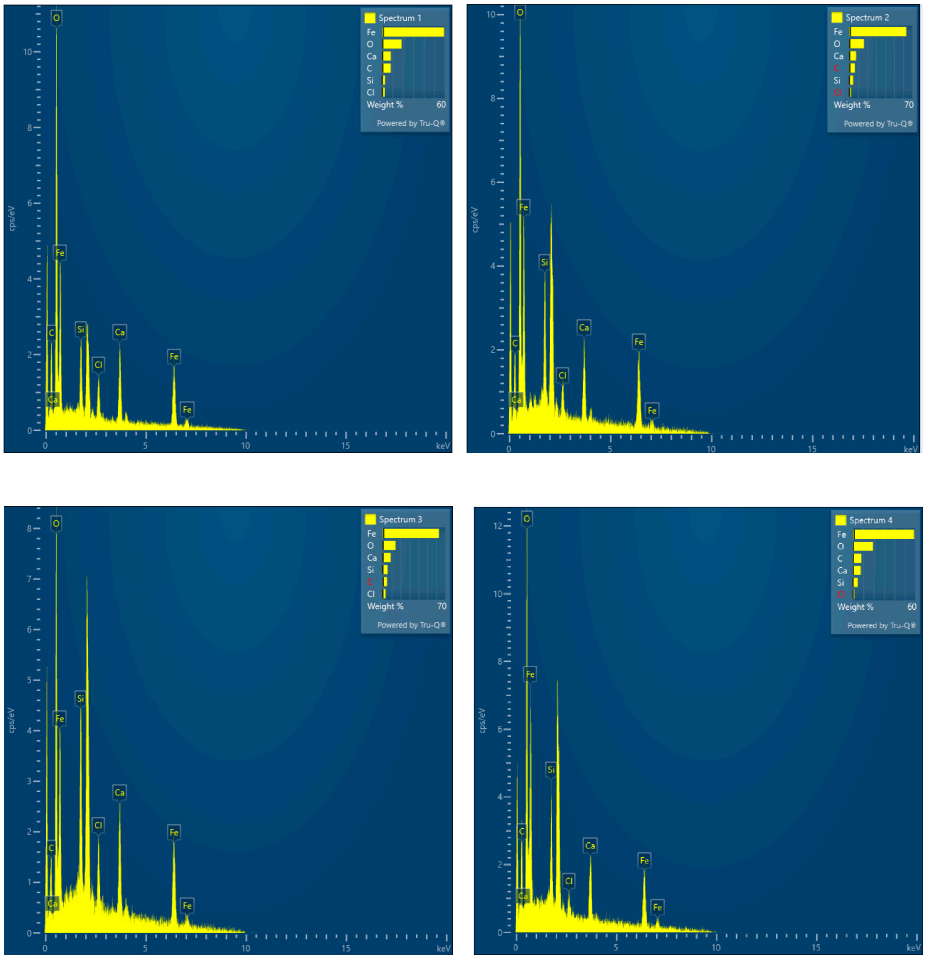


Figure S1. EDX images acquired from different position on the inner surface of the used hydrophilic PVDF HF membranes.

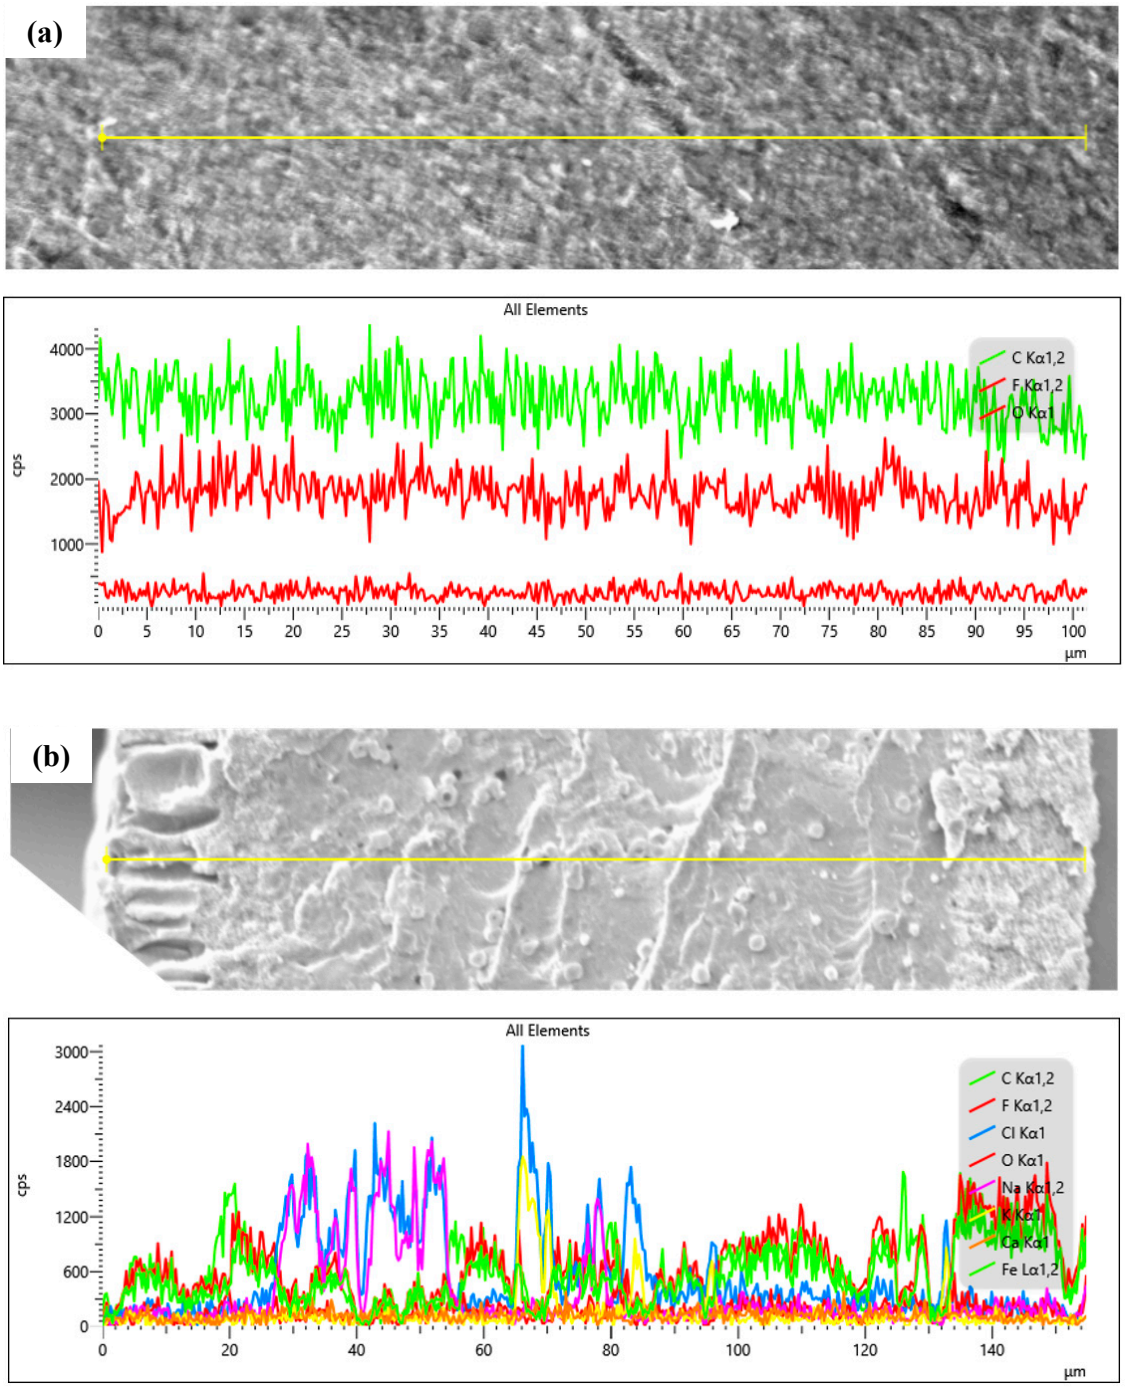


Figure S2. EDX spectra of the cross section of the hydrophilic PVDF HF membranes before and after OS experiments.