

Supplementary Materials

Enhancing the thermoelectric performance of n-type PbTe via Mn doping

Tingting Chen ¹, Yaqi Shao ¹, Ruilin Feng ¹, Junxiang Zhang ¹, Qidong Wang ¹, Yanan Dong ¹, Hongan Ma ²,
Bing Sun ^{1,*} and Dongwei Ao ^{3,*}

¹ School of Physics and Electronic Information, Weifang University, Weifang 261061, China; chentingting@wfu.edu.cn (T.C.); 15563423102@163.com (Y.S.); z969600069@163.com (R.F.); 15553612871@163.com (J.Z.); wangqidong2001@163.com (Q.W.); yndong@wfu.edu.cn (Y.D.)

² National Key Lab of Superhard Materials, Jilin University, Changchun 130012, China; maha@jlu.edu.cn

³ School of Machinery and Automation, Weifang University, Weifang 261061, China

* Correspondence: wywdsunbing@wfu.edu.cn (B.S.); aodongwei@wfu.edu.cn (D.A.)

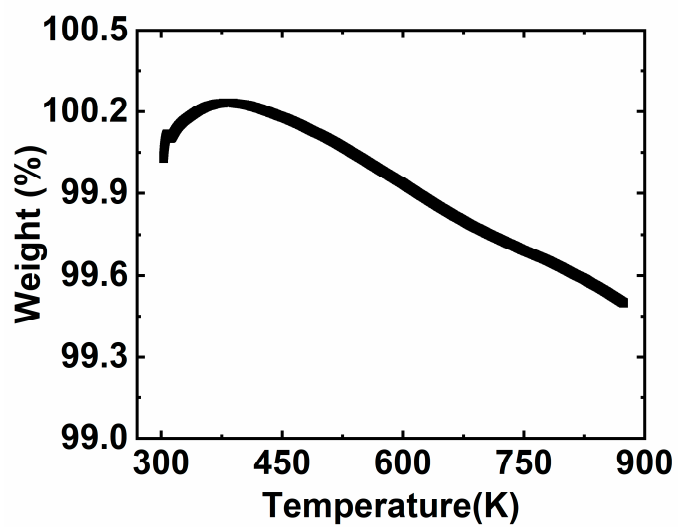


Figure S1 The TGA curves of $\text{Pb}_{0.985-x}\text{Sb}_{0.015}\text{Mn}_x\text{Te}$ ($x=1.0\%$) alloy heating to 873 K in N_2 at a rate of 10 K/min