

Highly effective anti-organic fouling performance of a modified PVDF membrane using a triple-component copolymer of $P(\text{St}_x\text{-co-MAA}_y)\text{-g-fPEG}_z$ as the additive

X.J. Zhou^{1,2,3}, Y.Z. Sun^{1,2}, S.S. Shen^{1,2,3}, Y. Li¹, R.B. Bai^{1,2,3} *

1 Center for Separation and Purification materials & Technologies, Suzhou University of Science and Technology, Suzhou 215009, China, zhou-xiaoj@163.com (X.Z.); sunyizhuo2019@163.com (Y.S.); shusushen@mail.usts.edu.cn (S.S.); liyan370403@163.com (Y.L.);

2 School of Environmental Science and Engineering, Suzhou University of Science and Technology, Suzhou 215009, China

3 Jiangsu Collaborative Innovation Center for Technology and Material of Water Treatment, Suzhou 215009, China

*Correspondence: ceebairb@live.com

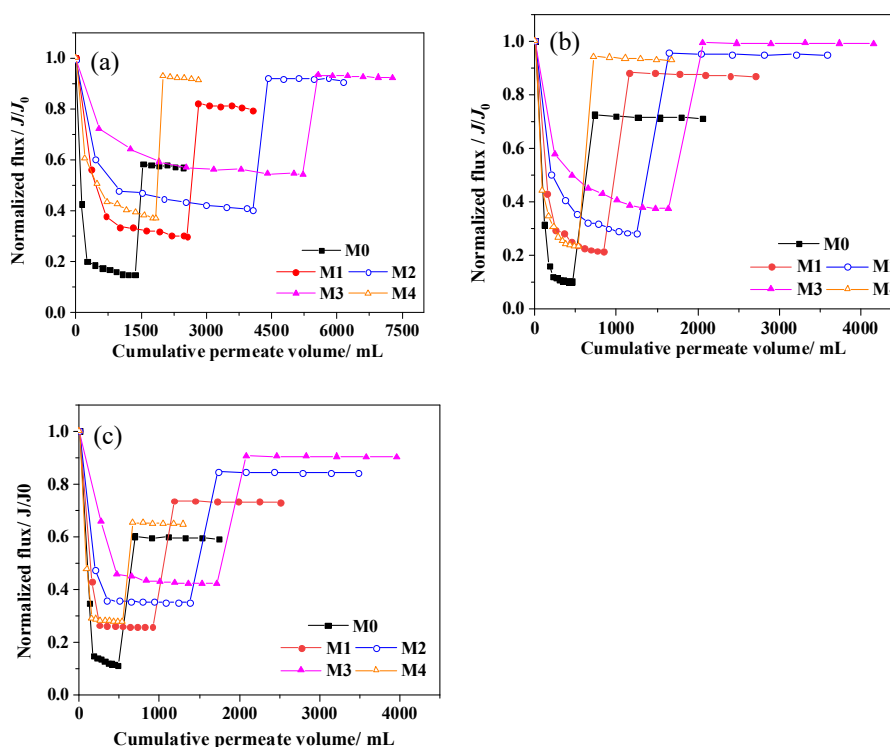


Figure S1 Normalized flux with cumulative permeate volume for the various prepared membranes during the filtration of (a) ($c_f = 1000$ mg/L), (b) HA solution ($c_f = 1000$ mg/L) and (c) oil emulsion ($c_f = 100$ mg/L).