Article

An analysis of foams produced from recycled polyolefins and low-cost foaming agents: Benchmarking using pore size, distribution, shear effects and thermal properties

Krishnamurthy Prasad [1], Fareed Tamaddoni Jahromi [1], Shammi Sultana Nisha [1], John Stehle [2], Emad Gad [1], Mostafa Nikzad [1,*]

[1] School of Engineering, Swinburne University of Technology, Hawthorn, VIC, 3122, Australia; krishnamurthyprasad@swin.edu.au (K.P.); ftamaddonijahromi@swin.edu.au (F.T.J.); snisha@swin.edu.au (S.S.N.); egad@swin.edu.au (E.G.)
[2] Robovoid Pty Ltd, Australia; johnstehle@robovoid.com (J.S.)
* Correspondence: mnikzad@swin.edu.au (M.N.)

Supplementary Material S1

Thermogravimetry analysis of the recycled polymers

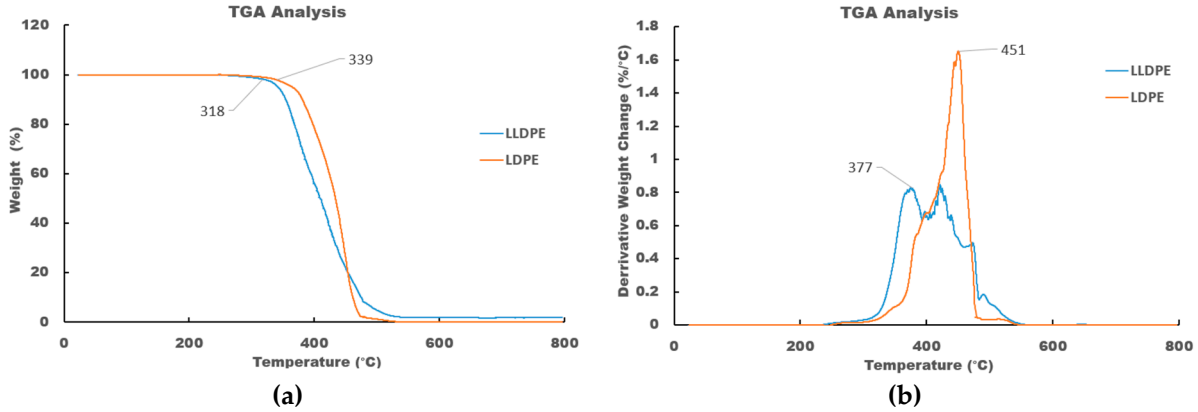


Figure S 1 TGA analysis of recycled LLDPE and LDPE, a) changes of weight vs temperature and, b) Differential Thermal Analysis (DTA) curve