Supplementary Information

Evaluating Disinfection Performance and Energy Efficiency of a Dual-Wavelength UV-LED Flow-Through Device for Point-of-Use Water Treatment

Yoontaek Oh [1,2], Hyun-Chul Kim [3], Laura Boczek [1], Hodon Ryu [1,*]

[1] United States Environmental Protection Agency, Office of Research and Development, 26 W. Martin Luther King Dr., Cincinnati, Ohio 45268

[2] Pegasus Technical Services, Inc., 26 W. Martin Luther King Dr., Cincinnati, Ohio 45268

[3] Research Institute for Advanced Industrial Technology, College of Science and Technology, Korea University, Sejong 30019, Republic of Korea

* Correspondence: ryu.hodon@epa.gov

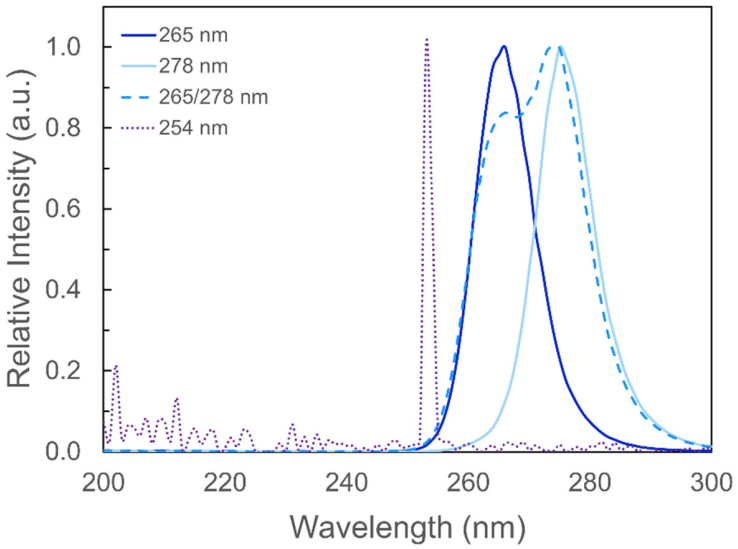


Figure S1. Emission spectra of UV light sources.

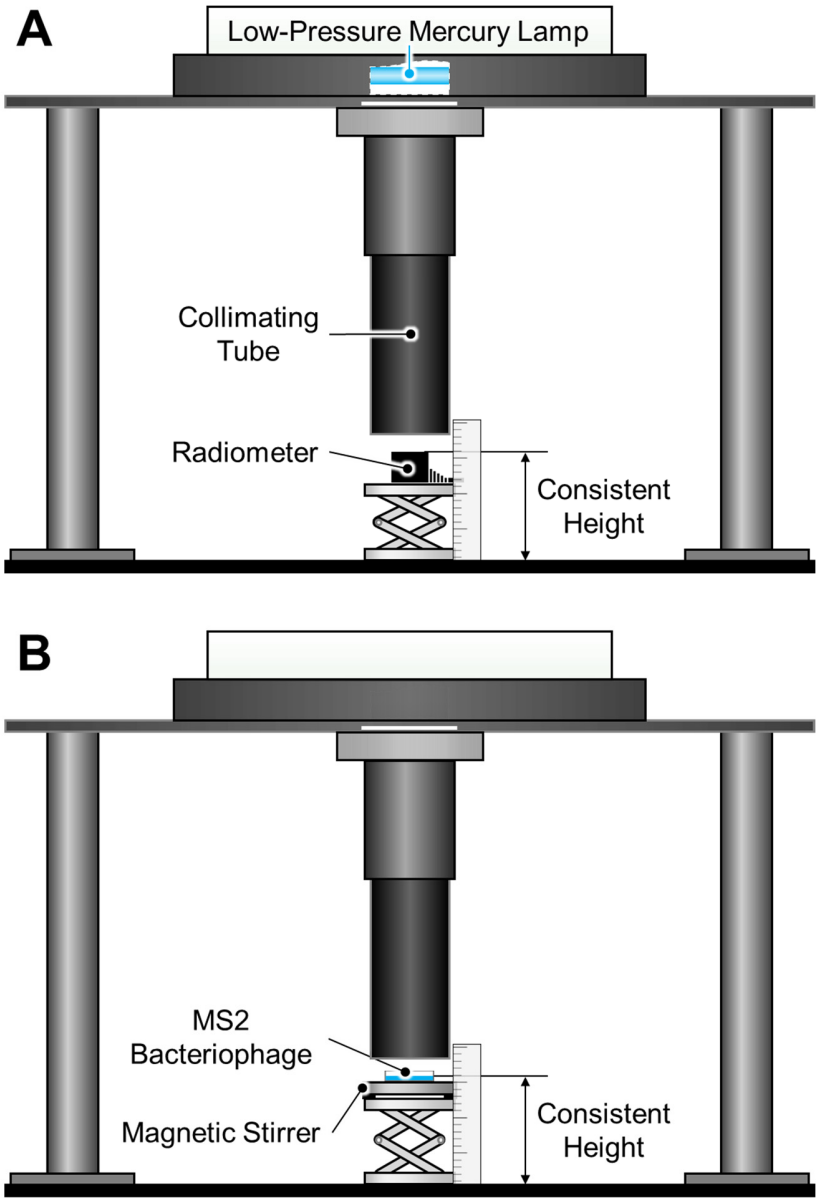


Figure S2. Custom-built low-pressure UV mercury lamp collimated beam apparatus.

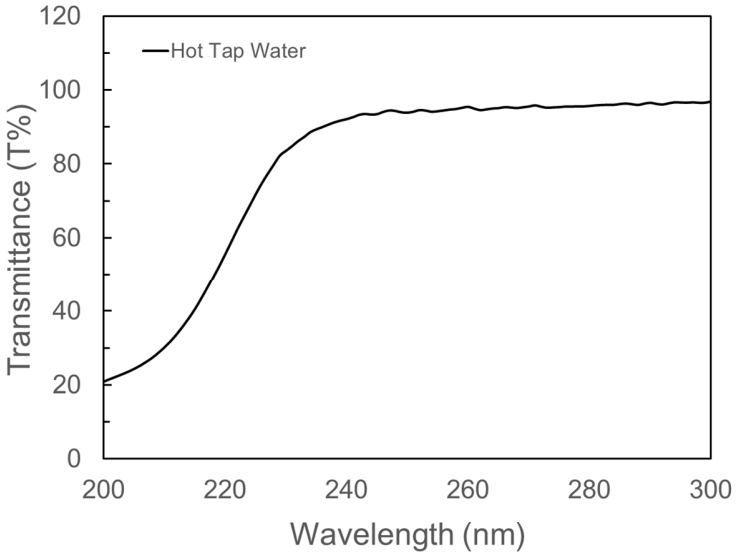


Figure S3. UV transmittance of hot tap water.