

# Systematic Review of Decision Making Algorithms in Extended Neutrosophic Sets

Mohsin Khan <sup>1</sup>, Le Hoang Son <sup>2,\*</sup>, Mumtaz Ali <sup>3</sup>, Hoang Thi Minh Chau <sup>4</sup>, Nguyen Thi Nhu Na <sup>5</sup> and Florentin Smarandache <sup>6</sup>

<sup>1</sup> Department of Mathematics, Abdul Wali Khan University, Mardan 23200, Pakistan; mohsinkhan7284@gmail.com

<sup>2</sup> VNU Information Technology Institute, Vietnam National University, Hanoi 122400, Vietnam

<sup>3</sup> Institute of Agriculture and Environment, School of Agricultural, Computational and Environmental Sciences, University of Southern Queensland, Springfield, QLD 4300, Australia; Mumtaz.Ali@usq.edu.au

<sup>4</sup> Center for Informatics and English Training, University of Economics and Technical Industries, Hanoi 113400, Vietnam; htmchau@uneti.edu.vn

<sup>5</sup> Dien Bien Teacher Training College, Dien Bien 381100, Vietnam; nhuna.cdsp@gmail.com

<sup>6</sup> Department of Mathematics, University of New Mexico, Albuquerque, NM 87131, USA; fsmarandache@gmail.com

\* Correspondence: sonlh@vnu.edu.vn; Tel.: +84-904-171-284

Received: 10 July 2018; Accepted: 20 July 2018; Published: 1 August 2018



**Abstract:** The Neutrosophic set (NS) has grasped concentration by its ability for handling indeterminate, uncertain, incomplete, and inconsistent information encountered in daily life. Recently, there have been various extensions of the NS, such as single valued neutrosophic sets (SVNSs), Interval neutrosophic sets (INSs), bipolar neutrosophic sets (BNSs), Refined Neutrosophic Sets (RNSs), and triangular fuzzy number neutrosophic set (TFNNs). This paper contains an extended overview of the concept of NS as well as several instances and extensions of this model that have been introduced in the last decade, and have had a significant impact in literature. Theoretical and mathematical properties of NS and their counterparts are discussed in this paper as well. Neutrosophic-set-driven decision making algorithms are also overviewed in detail.

**Keywords:** multi attribute algorithms; decision making; neutrosophic set; literature review

## 1. Introduction

The Neutrosophic set (NS) originates from neutrosophy, which is a branch of philosophy that provides a means to imitate the possibility and neutralities that refer to the grey area between the affirmative and the negative common to most real-life situations [1]. Let  $\langle M \rangle$  be an element, which can be an idea, an element, a proposition, or a theorem, etc.; with  $\langle \text{anti } M \rangle$  being the opposite of  $\langle M \rangle$ ; while  $\langle \text{neut } M \rangle$  is neither  $\langle M \rangle$  nor  $\langle \text{anti } M \rangle$  but is the neutral linked to  $\langle M \rangle$ ; e.g.,  $\langle M \rangle = \text{success}$ ,  $\langle \text{anti } M \rangle = \text{loss}$ , and  $\langle \text{neut } M \rangle = \text{tie game}$ . Another example to understand this concept is to let  $\langle M \rangle = \text{voting for a candidate}$ , we would have  $\langle \text{anti } M \rangle = \text{voting against}$ , and  $\langle \text{neut } M \rangle = \text{blank vote}$ . If  $\langle \text{anti } M \rangle$  does not exist,  $\{m \langle \text{anti } M \rangle\} = 0$ . Similarly, if  $\langle \text{neut } M \rangle$  does not exist,  $\{m \langle \text{neut } M \rangle\} = 0$  [1]. This type of issue is an example of a Fuzzy Set (FS) and Intuitionistic Fuzzy Set (IFS) that can be handled by a NS with indeterminacy membership [2,3]. Therefore, for addressing many decision making problems that involve human knowledge, which is often pervaded with uncertainty, indeterminacy, and inconsistency in information, the concept of NS can be useful. Areas such as artificial intelligence, applied physics, image processing, social science, and topology also suffer from the same problems.

On the basis of the FS and its extended concepts (interval valued FS, intuitionistic FS, and so on), by accumulation an independent indeterminacy association function to the existing IFs model proposed by Atanassov [2], Smarandache [3] proposed the concept of NS. Several extensions and special cases of NSs have been proposed in the literature. These cases include the single valued neutrosophic sets (SVNS) [3,4], interval neutrosophic sets (INs) [5], Neutrosophic Soft Set (NSS) [6], INSS [7], Refined Neutrosophic Set (RNS) [8], INRS [9], IVNSRS [10], CNS [11], bipolar neutrosophic sets (BNS) [12], and neutrosophic cube set [13]. Recently, NSs have become a fascinating research topic and have drawn wide attention. Some of the most significant developments in the study of NS include the introduction of SVNSs and INs. Wang et al. [14] suggested a SVNS to accommodate engineering and scientific problems. The authors also proposed INs in which association, indeterminacy, and non-association are extended to interval numbers [15]. The SVNS and IN models are the most renowned and most ordinarily used among the neutrosophic models in literature. Many different characteristics of these models have been studied in the literature. These include decision making methods, correlation coefficients, information measures and optimization techniques.

In the extent of natural science, operations research, economics, management science, military affairs, and urban planning, NSs have a broad application. They also can be applied to decision making problems when the ambiguity and complexity of the attributes make the problems impossible to be expressed or valued with real numbers. There were some studies of multi-criteria decision-making methods based on SVNS [16–27], INs [28–35], BNs [36–38], generalized neutrosophic soft set [39,40], neutrosophic refined set [41–44], and triangular fuzzy neutrosophic number set (TFNNs) [45–49]. This paper presents an overview of NSs and some of the most significant instances and extensions of NS, as well as the application of these models in multiple attribute decision-making (MADM) problems. The neutrosophic models that will be reviewed in this paper include the SVNS [14], IN [15], BNS [12], ReNS [31], and the aggregation of TFNS [47]. The neutrosophic set has been also applied to various applications [50] such as e-learning [51], medical image denoising [52], Strogatz's spirit [53].

Section 2 presents an overview of NS that includes its background and the origin of the concept, the formal definition of neutrosophic sets, and the motivation behind the introduction of neutrosophic sets. Section 3 presents an overview of several instances and extensions of neutrosophic sets including the definition and properties while Section 4 presents decision making approaches for these models. Section 5 presents the concluding remarks, followed by the acknowledgements and the list of references.

## 2. Preliminary

**Definition 1 ([1]).** Let a space of discourse be  $U$  with a general element  $\ddot{h} \in U$ . A NS  $\ddot{Y}$  in  $U$  is described by a truth-association function  $t_{\ddot{Y}}$ , an indeterminacy-association function  $i_{\ddot{Y}}$  and a non-association function  $f_{\ddot{Y}}$ , where  $t_{\ddot{Y}}(\ddot{h})$ ,  $i_{\ddot{Y}}(\ddot{h})$ ,  $f_{\ddot{Y}}(\ddot{h})$ , are real standard or non-standard subsets of  $]^{-0}, 1^{+}[$  so that  $t_{\ddot{Y}} : U \rightarrow ]^{-0}, 1^{+}[$ ,  $i_{\ddot{Y}} : U \rightarrow ]^{-0}, 1^{+}[$ ,  $f_{\ddot{Y}} : U \rightarrow ]^{-0}, 1^{+}[$ . The sum of three independent association degrees  $t_{\ddot{Y}}(\ddot{h})$ ,  $i_{\ddot{Y}}(\ddot{h})$ ,  $f_{\ddot{Y}}(\ddot{h})$ , satisfies the following condition/constraint:

$$0^{-} \leq \sup t_{\ddot{Y}}(\ddot{h}) + \sup i_{\ddot{Y}}(\ddot{h}) + \sup f_{\ddot{Y}}(\ddot{h}) \leq 3^{+}$$

**Definition 2 ([14]).** Let a space of discourse be  $U$  with a general element  $\ddot{h} \in U$ . A SVNS  $\ddot{M}$  in  $U$  is categorized by a truth association function  $t_{\ddot{M}}$ , indeterminacy association function  $i_{\ddot{M}}$  and non-association function  $f_{\ddot{M}}$  such that for each point  $\ddot{h} \in U$ ,  $t_{\ddot{M}}(\ddot{h})$ ,  $i_{\ddot{M}}(\ddot{h})$ ,  $f_{\ddot{M}}(\ddot{h}) \in [0, 1]$ , i.e., their cardinality is 1. When  $U$  is continuous, a SVNS  $\ddot{M}$  can be stated as:

$$\ddot{M} = \int_U \frac{\langle t_{\ddot{M}}(\ddot{h}), i_{\ddot{M}}(\ddot{h}), f_{\ddot{M}}(\ddot{h}) \rangle}{\ddot{h}}, \ddot{h} \in U.$$

When  $U$  is discrete, a SVNS  $\ddot{M}$  can be stated as:

$$\ddot{M} = \sum_{i=1}^n \frac{\langle t(\ddot{h}), i(\ddot{h}), f(\ddot{h}) \rangle}{\ddot{h}_i}, \ddot{h}_i \in U.$$

**Definition 3 ([5]).** Let a space of discourse be  $U$  with a general element  $\ddot{h} \in U$ . An INS  $\ddot{M}$  in  $U$  is defined as:  $\ddot{M} = \left\{ \ddot{h} \left( t_{\ddot{M}}(\ddot{h}), i_{\ddot{M}}(\ddot{h}), f_{\ddot{M}}(\ddot{h}) \right) \mid \ddot{h} \in U \right\}$ , where  $t_{\ddot{M}}$ ,  $i_{\ddot{M}}$  and  $f_{\ddot{M}}$  are the truth interval association function, indeterminacy interval association function, and the non interval association function, respectively. For each point  $\ddot{h}$  in  $U$ , we have interval values  $f_{\ddot{M}}(\ddot{h}), i_{\ddot{M}}(\ddot{h}), t_{\ddot{M}}(\ddot{h}) \subseteq [0, 1]$ , and  $0 \leq \sup(t_{\ddot{M}}(\ddot{h})) + \sup(i_{\ddot{M}}(\ddot{h})) + \sup(f_{\ddot{M}}(\ddot{h})) \leq 3$ .

For closeness, the following notation is used to represent an interval neutrosophic value (INV):

$$\ddot{h} = \left( [t^L, t^U], [i^L, i^U], [f^L, f^U] \right).$$

**Definition 4 ([12]).** Let a space of discourse be  $U$ , then a BNS  $\ddot{M}$  in  $U$  is defined as follows:  $\ddot{M} = \left\{ \ddot{h}, \left\langle t_{\ddot{M}}^+(\ddot{h}), i_{\ddot{M}}^+(\ddot{h}), f_{\ddot{M}}^+(\ddot{h}), t_{\ddot{M}}^-(\ddot{h}), i_{\ddot{M}}^-(\ddot{h}), f_{\ddot{M}}^-(\ddot{h}) \right\rangle \mid \ddot{h} \in U \right\}$  where,

$$t_{\ddot{M}}^+(\ddot{h}), i_{\ddot{M}}^+(\ddot{h}), f_{\ddot{M}}^+(\ddot{h}) : U \rightarrow [0, 1]$$

$$t_{\ddot{M}}^-(\ddot{h}), i_{\ddot{M}}^-(\ddot{h}), f_{\ddot{M}}^-(\ddot{h}) : U \rightarrow [-1, 0]$$

Analogous to a BNS  $\ddot{M}$ , the positive association degrees  $t_{\ddot{M}}^+(\ddot{h}), i_{\ddot{M}}^+(\ddot{h})$  and  $f_{\ddot{M}}^+(\ddot{h})$  represent the truth-association, indeterminate association, and non-association of an element  $\ddot{h} \in U$ , whereas the negative association degrees  $t_{\ddot{M}}^-(\ddot{h}), i_{\ddot{M}}^-(\ddot{h})$  and  $f_{\ddot{M}}^-(\ddot{h})$  represent the truth-association, indeterminate association, and non-association of the implicit counter-property of set  $\ddot{M}$ . For closeness, a BNS is denoted as  $\ddot{r}_{pq} = \langle t_{pq}^+, i_{pq}^+, f_{pq}^+, t_{pq}^-, i_{pq}^-, f_{pq}^- \rangle$ .

**Definition 5 ([6]).** Let a preliminary space set be  $U$  and  $\ddot{M} \subset \ddot{T}$  be a set of constraints. Let the set of all neutrosophic subsets of  $U$  were denoted by  $NS(U)$ . The collection  $(L, \ddot{M})$  is named as the NSS over  $U$ , where  $L$  is a mapping given by  $L : \ddot{M} \rightarrow NS(U)$ .

**Definition 6 ([6]).** Let a preliminary space set be  $U$  and  $\ddot{M} \subset \ddot{T}$  be a set of constraints. Let the set of all IN subsets of  $U$  were denoted by  $INS$ . The collection  $(L, \ddot{M})$  is named to be the INSS over  $U$ , where  $L$  is a mapping given by  $L : \ddot{M} \rightarrow NS(U)$ .

**Definition 7 ([6]).** Let a preliminary space set be  $U$  and  $\ddot{M} \subset \ddot{T}$  be a set of constraints. Let  $NS(U)$  be the set of all neutrosophic subsets of  $U$ . A GNSS  $L^{\tilde{\mu}}$  over  $U$  is defined by the set of ordered pairs.

$$L^{\tilde{\mu}} = \left\{ (L(\ddot{s}), \tilde{\mu}(\ddot{s})) : \ddot{s} \in \ddot{M}, L(\ddot{s}) \in \widetilde{N}(U), \tilde{\mu}(\ddot{s}) \in [0, 1] \right\} \quad (7)$$

where  $L$  is a mapping given by  $L : \ddot{M} \rightarrow NS(U) \times P$  and  $\tilde{\mu}$  is a fuzzy set such that  $\tilde{\mu} : \ddot{M} \rightarrow P = [0, 1]$ . Here,  $L^{\tilde{\mu}}$  is a mapping defined by  $L^{\tilde{\mu}} : \ddot{M} \rightarrow NS(U) \times P$ .

For any parameter  $\ddot{s}, \ddot{h} \in \ddot{M}$ ,  $L(\ddot{h})$  is referred to as the neutrosophic value set of parameter  $\ddot{s}$ , i.e.,  $L(\ddot{s}) = \left\{ \left\langle \ddot{h}, t_{L(\ddot{s})}(\ddot{h}), i_{L(\ddot{s})}(\ddot{h}), f_{L(\ddot{s})}(\ddot{h}) \right\rangle : \ddot{h} \in U \right\}$ , where  $t, i, f : U \rightarrow [0, 1]$  are the associations functions of truth, indeterminacy, and falsity respectively, of the element  $\ddot{h} \in U$ . For any  $\ddot{h} \in U$  and  $\ddot{s} \in \ddot{M}$ ,  $0 \leq t_{L(\ddot{s})}(\ddot{h}) + i_{L(\ddot{s})}(\ddot{h}) + f_{L(\ddot{s})}(\ddot{h}) \leq 3$ .  $L^{\tilde{\mu}}$  can be stated by:

$$L^{\tilde{\mu}}(\ddot{h}) = \left\{ \left( \frac{\ddot{h}_1}{L(\ddot{s})(\ddot{h}_1)}, \frac{\ddot{h}_2}{L(\ddot{s})(\ddot{h}_2)}, \dots, \frac{\ddot{h}_n}{L(\ddot{s})(\ddot{h}_n)} \right), \tilde{\mu}(\ddot{s}) \right\}.$$

**Definition 8 ([40]).** Let a preliminary space set be  $U$  and  $\ddot{M} \subset \ddot{T}$  be a set of constraints. Suppose that  $INS(U)$  is the set of all INSs over  $U$  defined over  $P$ , where  $P$  is the set of all closed subsets of  $[0, 1]$ . A GINSS  $L^{\tilde{\mu}}$  over  $U$  is defined by the set of ordered pairs of the form.

$$L^{\tilde{\mu}} = \{(L(\ddot{s}), \tilde{\mu}(\ddot{s})) : \ddot{s} \in \ddot{M}, L(\ddot{s}) \in INS(U), \tilde{\mu}(\ddot{s}) \in [0, 1]\}$$

where  $L$  is a mapping function given by  $L : \ddot{M} \rightarrow INS(U) \times P$  and  $\tilde{\mu}$  is a fuzzy set such that  $\tilde{\mu} : \ddot{M} \rightarrow P = [0, 1]$ . Here,  $L^{\tilde{\mu}}$  is a mapping defined by  $L^{\tilde{\mu}} : \ddot{M} \rightarrow NS(U) \times P$ .

For any parameter  $\ddot{s}$ ,  $\ddot{s} \in \ddot{M}$ ,  $L(\ddot{s})$  is mentioned to as the interval neutrosophic value set of parameter  $\ddot{s}$ , i.e.,  $L(\ddot{s}) = \left\{ \langle \ddot{h}, t_{L(\ddot{s})}(\ddot{h}), i_{L(\ddot{s})}(\ddot{h}), f_{L(\ddot{s})}(\ddot{h}) \rangle : \ddot{h} \in U \right\}$ ,

$$t_{L(\ddot{s})}(\ddot{h}), i_{L(\ddot{s})}(\ddot{h}), f_{L(\ddot{s})}(\ddot{h}) : U \rightarrow \text{int}[0, 1].$$

with the condition

$$0 \leq \sup t_{L(\ddot{s})}(\ddot{h}) + \sup i_{L(\ddot{s})}(\ddot{h}) + \sup f_{L(\ddot{s})}(\ddot{h}) \leq 3, \forall \ddot{h} \in U.$$

The intervals  $t_{L(\ddot{s})}(\ddot{h})$ ,  $i_{L(\ddot{s})}(\ddot{h})$ , and  $f_{L(\ddot{s})}(\ddot{h})$  are the interval-based membership functions for the truth, indeterminacy and falsity for each  $\ddot{h} \in U$ , respectively. For convenience, let us denote

$$\begin{aligned} t_{L(\ddot{s})}(\ddot{h}) &= [t_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), t_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})] \\ i_{L(\ddot{s})}(\ddot{h}) &= [i_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), i_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})] \\ f_{L(\ddot{s})}(\ddot{h}) &= [f_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), f_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})] \end{aligned}$$

$$\text{then } L(\ddot{s}) = \left\{ \langle \ddot{h}, [t_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), t_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})], [i_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), i_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})], [f_{L(\ddot{s})}^{\ddot{L}}(\ddot{h}), f_{L(\ddot{s})}^{\ddot{U}}(\ddot{h})] \rangle : \ddot{h} \in U \right\}.$$

**Definition 9 ([42]).** Let a neutrosophic refined set  $\ddot{K}$  is

$$\ddot{K} = \left\{ \langle \ddot{h}, (t_{\ddot{K}}^1(\ddot{h}_i), t_{\ddot{K}}^2(\ddot{h}_i), \dots, t_{\ddot{K}}^m(\ddot{h}_i)), (i_{\ddot{K}}^1(\ddot{h}_i), i_{\ddot{K}}^2(\ddot{h}_i), \dots, i_{\ddot{K}}^m(\ddot{h}_i)), (f_{\ddot{K}}^1(\ddot{h}_i), f_{\ddot{K}}^2(\ddot{h}_i), \dots, f_{\ddot{K}}^m(\ddot{h}_i)) \rangle : \ddot{h} \in U \right\}$$

where,

$$t_{\ddot{K}}^q(\ddot{h}_i) : U \in [0, 1], i_{\ddot{K}}^q(\ddot{h}_i) : U \in [0, 1], f_{\ddot{K}}^q(\ddot{h}_i) : U \in [0, 1], q = 1, 2, \dots, n$$

such that

$$0 \leq \sup t_{\ddot{K}}^q(\ddot{h}_i) + \sup i_{\ddot{K}}^q(\ddot{h}_i) + \sup f_{\ddot{K}}^q(\ddot{h}_i) \leq 3, q = 1, 2, \dots, n \text{ for any } \ddot{h} \in U.$$

Now,  $(t_{\ddot{K}}^q(\ddot{h}_i), i_{\ddot{K}}^q(\ddot{h}_i), f_{\ddot{K}}^q(\ddot{h}_i))$  is the truth-association sequence, indeterminacy association sequence and non-association sequence of the element  $\ddot{h}$ , respectively. The dimension of neutrosophic refined sets  $\ddot{K}$  is called  $n$ .

**Definition 10 ([45]).** Assume that  $U$  is the finite space of discourse and  $L[0, 1]$  is the set of all TFN on  $[0, 1]$ . A TFNNS  $\ddot{K}$  in  $U$  is represented by:

$$\ddot{K} = \{ \langle \ddot{h}, t_{\ddot{K}}(\ddot{h}), i_{\ddot{K}}(\ddot{h}), f_{\ddot{K}}(\ddot{h}) \rangle : \ddot{h} \in U \},$$

where  $t_{\ddot{K}}(\ddot{h}) : U \rightarrow L[0, 1]$ ,  $i_{\ddot{K}}(\ddot{h}) : U \rightarrow L[0, 1]$  and  $f_{\ddot{K}}(\ddot{h}) : U \rightarrow L[0, 1]$ .

The triangular fuzzy numbers  $t_{\ddot{K}}(\ddot{h}) = (t_{\ddot{K}}^1(\ddot{h}), t_{\ddot{K}}^2(\ddot{h}), t_{\ddot{K}}^3(\ddot{h}))$ ,  $i_{\ddot{K}}(\ddot{h}) = (i_{\ddot{K}}^1(\ddot{h}), i_{\ddot{K}}^2(\ddot{h}), i_{\ddot{K}}^3(\ddot{h}))$  and  $f_{\ddot{K}}(\ddot{h}) = (f_{\ddot{K}}^1(\ddot{h}), f_{\ddot{K}}^2(\ddot{h}), f_{\ddot{K}}^3(\ddot{h}))$ , denote the truth-association degree, indeterminacy-association degree, and non-association degree of  $\ddot{h} \in \ddot{K}$ , respectively, and  $\forall \ddot{h} \in U$ ,

$$0 \leq t_{\ddot{K}}^3(\ddot{h}) + i_{\ddot{K}}^3(\ddot{h}) + f_{\ddot{K}}^3(\ddot{h}) \leq 3.$$

For notational convenience, we consider  $\ddot{K} = \langle (\alpha, \beta, \gamma), (\mu, \nu, \rho), (\chi, \lambda, \delta) \rangle$  as trapezoidal fuzzy number neutrosophic values (TFNNVs), where

1.  $(t_{\ddot{K}}^1(\ddot{h}), t_{\ddot{K}}^2(\ddot{h}), t_{\ddot{K}}^3(\ddot{h})) = (\alpha, \beta, \gamma),$
2.  $(i_{\ddot{K}}^1(\ddot{h}), i_{\ddot{K}}^2(\ddot{h}), i_{\ddot{K}}^3(\ddot{h})) = (\mu, \nu, \rho),$
3.  $(f_{\ddot{K}}^1(\ddot{h}), f_{\ddot{K}}^2(\ddot{h}), f_{\ddot{K}}^3(\ddot{h})) = (\chi, \lambda, \delta).$

**Definition 11 ([45]).** Assume that  $\ddot{K}_1 = \langle (\alpha_1, \beta_1, \gamma_1), (\mu_1, \nu_1, \rho_1), (\chi_1, \lambda_1, \delta_1) \rangle$  is a TFNNV in the set of real numbers, the score function  $\ddot{S}(\ddot{K}_1)$  of  $\ddot{K}_1$  is

$$\ddot{S}(\ddot{K}_1) = \frac{1}{12} [8 + (\alpha_1 + 2\beta_1 + \gamma_1) - (\mu_1 + 2\nu_1 + \rho_1) - (\chi_1 + 2\lambda_1 + \delta_1)].$$

The value of the score function of TFNNV  $\ddot{K}^+ = \langle (1, 1, 1), (0, 0, 0), (0, 0, 0) \rangle$  is  $\ddot{S}(\ddot{K}^+) = 1$ , and value of the accuracy function of  $\ddot{K}^- = \langle (0, 0, 0), (1, 1, 1), (1, 1, 1) \rangle$  is  $\ddot{S}(\ddot{K}^-) = -1$ .

**Definition 12 ([45]).** Assume that  $\ddot{K}_1 = \langle (\alpha_1, \beta_1, \gamma_1), (\mu_1, \nu_1, \rho_1), (\chi_1, \lambda_1, \delta_1) \rangle$  is a TFNNV in the set of real numbers, and the accuracy function  $\ddot{H}(\ddot{K}_1)$  of  $\ddot{K}_1$  is defined as  $\ddot{H}(\ddot{K}_1) = \frac{1}{4} [(\alpha_1 + 2\beta_1 + \gamma_1) - (\chi_1 + 2\lambda_1 + \delta_1)]$ . The difference between truth and falsity determines the accuracy function  $\ddot{H}(\ddot{K}_1) \in [-1, 1]$ . As the difference increases, the more ideal the value of the TFNNV. The accuracy function  $\ddot{H}(\ddot{K}^-) = -1$  for  $\ddot{K}^+ = \langle (1, 1, 1), (0, 0, 0), (0, 0, 0) \rangle$ , and  $\ddot{H}(\ddot{K}^-) = -1$  for the TFNNV is  $\ddot{K}^- = \langle (0, 0, 0), (1, 1, 1), (1, 1, 1) \rangle$ .

### 3. Review of Multi-Attribute Decision Making Algorithms in Extended Neutrosophic Sets

Several theories have been proposed such as FST [53], IFST [2], Probabilistic fuzzy theory, and SST [54] to handle uncertainty, imprecision, and vagueness. But, to deal with indeterminate information existing in beliefs system, the NS was developed by Smarandache [1]; it generalizes FSs and IFSs and so on. On an instance of NS, they defined the set theoretic operators and called it SVN [4]. The SVN is a generalization of the classic set, FS, IVFS, IFS and a paraconsistent set. In recent years a subclass of NS called the SVN has been proposed. Multiple criteria decision-making (MCDM) problems are important applications to solve single-valued neutrosophic sets. INs were proposed to handle issues with a set of numbers in a real unit interval. However, aggregation operators and decision making methods have fewer reliable operations for INs. Based on the associated research of INs, two operators are developed on the basis of the operations and comparison approach. Therefore, applying the aggregation operators as a method for exploring MCDM problems was further explored.

Maji [6] presented the notion of NSS. On NSS some definitions and operations have been introduced. Some properties of this notion have been established. F Karaaslan [55] constructed a DM method and a GDM method by using these new definitions. Broumi [40] introduced the notion of GINSS. An application of GINSS in the DM problem was also presented. The notion of BNS with its operations was presented by Deli et al. [12]. The BNSs score, made up of certainty and accuracy functions, was also proposed by them. To aggregate the BN information, the authors developed the BNWA operator and BNWG operator. The  $A_w$  and  $G_w$  operators were based on accuracy, score, and certainty functions. Mondal et al. [41] proposed and studied some properties of the cotangent similarity measure of NRS. Broumi et al. [56] proposed correlation measure of NSs and IF multi-sets. To construct the decision method for medical diagnosis by using a neutrosophic refined set, A. Samuel et al. [42] proposed a new approach (cosecant similarity measure). A technique to diagnose which patient is suffering from what disease was also developed. TFNNs were developed by Biswas et al. [45]. Then, the TFNNWAA operator and TFNNWGA operator were defined to cumulate TFNNs. Some of their properties of the proposed operators had also established by them. The operator have been used to MADM the problem and aggregate the TFNN based rating values of each alternative over the

attributes. There has been a substantial amount of work done on neutrosophic sets and their extensions. Table 1 presents a comprehensive summary of existing works related to neutrosophic sets as well as the instances and extensions of neutrosophic sets.

**Table 1.** Summary of works related to neutrosophic sets and its extensions.

No.	Type of Neutrosophic Model	Literature
(a)	Neutrosophic based models	1. Wang et al. (2005)—interval neutrosophic sets.
		2. Wang et al. (2010)—single valued neutrosophic sets.
		3. Bhowmik, Pal (2010)—intuitionistic neutrosophic set and its relations.
		4. Maji (2013)—neutrosophic soft set.
		5. Broumi and Smarandache (2013)—intuitionistic neutrosophic soft set.
		6. Sahin, Kucuk (2014)—generalised neutrosophic soft set.
		7. Broumi, Sahin, Smarandache (2014)—extended the GNSS model to INSSs to introduce the generalized interval neutrosophic soft set (GINSS) model.
		8. Broumi, Deli and Smarandache (2014)—neutrosophic parameterized soft set.
		9. Broumi, Smarandache and Dhar (2014)—rough neutrosophic set.
		10. Al-Quran and Hassan (2016)—fuzzy parameterized single valued neutrosophic soft expert set.
		11. Ali, Deli and Smarandache (2016)—neutrosophic cubic set.
		12. Karaaslan (2017)—possibility neutrosophic soft set (PNSS) and an accompanying PNSS based decision making method.
(b)	Neutrosophic based decision making methods for SVN, INS and SNS	1. Maji (2012)—a new decision making method based on NSS; applied it in an object recognition problem.
		2. Broumi and Smarandache (2013)—introduced several similarity measures between NSs based on type 1 and type 2 geometric distance and extended Hausdorff distance.
		3. Broumi and Smarandache (2013)—introduced several new correlation coefficients for INSSs.
		4. Ye (2013)—correlation coefficients for SVNNS.
		5. Chi and Liu (2013)—an extended TOPSIS method based on INSSs.
		6. Ye (2014)—correlation coefficients for SVNNS and INS to solve MADM.
		7. Broumi and Smarandache (2014)—a new cosine similarity measure on interval valued neutrosophic sets (IVNNS).
		8. Ye (2014)—MADM method based on simplified neutrosophic sets (SNSs).
		9. Ye and Zhang (2014)—similarity measures for SVNNS.
		10. Biswas, Pramanik and Giri (2014)—a MADM method to deal with single valued neutrosophic assessments using entropy based grey relational method.
		11. Ye (2014)—similarity measures between INSSs based on the relationship between distance and similarity measures between INSSs.
		12. Peng et al. (2014)—aggregation operators for SNSs and applied in MCGDM problems.
		13. Ye (2014)—a cross-entropy measure for SVNNS
		14. Biswas, Pramanik and Giri (2014)—a TOPSIS method for SVNNS to solve MAGDM problems.
		15. Sahin and Karabacak (2015)—an inclusion measure based decision making method for INSSs.
		16. Ye (2015)—extended TOPSIS method for MAGDM based on single valued neutrosophic linguistic numbers
		17. Sahin and Liu (2015)—maximizing deviation method for SVNNS.
		18. Zhang et al. (2015)—a weighted correlation coefficient based on integrated weight for INSSs.
		19. Ye (2015)—several improved cross-entropy measures for SVNNS and INSSs.
		20. Liu and Wang (2016)—a prioritized OWA operator for INSSs.

Table 1. Cont.

No.	Type of Neutrosophic Model	Literature
(b)	Neutrosophic based decision making methods for SVNS, INS and SNS	21. Deli and Subas (2016)—a ranking method for single valued neutrosophic numbers.
		22. Huang (2016)—several new formulae for the distance measures between SVNNSs.
		23. Ye (2016)—dimension root similarity measure of SVNNSs.
		24. Ye and Fu (2016)—a similarity measure based on tangent function for SVNNSs.
		25. Zhang et al. (2016)—constructed a decision making method based on the single valued neutrosophic multi-granulation rough sets.
		26. Tian et al. (2016)—a decision making method based on the cross-entropy measure for INSs.
		27. Karaaslan (2017)—correlation coefficient for single valued neutrosophic refined soft sets.
		28. Peng and Liu (2017)—three decision making methods for neutrosophic soft sets.
		29. Ye (2017)—several new similarity measures for SVNNSs that are based on the cotangent function.
		30. Thanh, Ali and Son (2017)—a new recommender system together with a clustering algorithm based on SVNNSs.
		31. Ye and Du (2017)—three types of information measures for INSs, namely the distance, similarity and entropy measures.
		32. Zhang, Li, Sangaiah and Broumi (2017)—an interval neutrosophic multigranulation rough set over two universes.
		33. Ali, Son, Thanh and Nguyen (2017)—a recommender system based on neutrosophic sets and a decision making algorithm.
		34. Huang, Wei and Wei (2017)—extended the VIKOR method for INSs.
(c)	Bipolar neutrosophic set	1. Deli et al. (2015)—a weighted average operator and weighted geometric operator for bipolar neutrosophic sets (BNSs).
		2. Ulucay, Deli and Sahin (2016)—similarity measures between BNSs.
		3. Dey, Pramanik and Giri (2016)—an extended TOPSIS method based on BNSs.
		4. Ali, Son, Deli and Tien (2017)—bipolar neutrosophic soft sets (BNSSs) and some aggregation operators.
(d)	Refined neutrosophic sets	1. Broumi and Smarandache (2014)—a similarity measure for neutrosophic refined sets.
		2. Mondal and Pramanik (2015)—a similarity measure for neutrosophic refined sets that is based on cotangent function.
		3. Deli, Broumi, Smarandache (2015)—neutrosophic refined sets in medical diagnosis.
		4. Broumi and Smarandache (2015)—extended Hausdorff distance and similarity measures for neutrosophic refined sets.
		5. Broumi and Deli (2016)—several correlation coefficients for neutrosophic refined sets.
		6. Chen, Ye, Du (2017)—vector similarity measure based on refined SNSs.
		7. Samuel and Narmadhagnanam (2017)—improved algorithm based on neutrosophic refined sets.
		8. Alkhazaleh and Hazaymeh (2018)—a similarity measure between n-valued refined neutrosophic soft sets.
(e)	Triangular fuzzy/trapezoidal neutrosophic sets	1. Biswas, Pramanik and Giri (2014)—a decision making method based on cosine similarity measure and trapezoidal fuzzy neutrosophic numbers.
		2. Ye (2015)—trapezoidal neutrosophic sets and a weighted arithmetic averaging operator and a weighted geometric averaging operator.
		3. Biswas, Pramanik and Giri (2016)—triangular fuzzy neutrosophic set (TrFNS), and weighted averaging arithmetic operator and weighted geometric aggregation operator.

#### 4. Some Typical Decision Making Methodson Extended Neutrosopic Sets

##### 4.1. Single Valued Neutrosophic Set (SVNS)

###### Algorithm 1

For rating the importance of measures and substitutes and to combine the opinions of each decision maker into one common opinion, a SVNS centered weighted averaging operator is used. For Multi Criteria Decision Making (MCDM) problems, TOPSIS method was extended by Boran et al. [57]. With SVNS information the notion of the TOPSIS method for Multi Attribute Group Decision Making (MAGDM) problems was extended by Biswas, Pramanik, and Giri [16]. Different domain experts in MAGDM problems provide the information regarding each substitute with respect to each parameter and take the form of SVNS. The TOPSIS method can be defined by the following procedures. Let the set of alternatives be  $\ddot{M} = (\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_a)$ , the set of criteria be  $\ddot{N} = (\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b)$ , and the performance ratings  $\ddot{J} = \{\ddot{j}_{ef} | f = 1, 2, \dots, b\}$  be  $\ddot{G} = \{\ddot{g}_{ef}\}$ ,  $e = 1, 2, \dots, a, f = 1, 2, \dots, b$ . In the following steps the TOPSIS procedure is obtained.

Step 1. The DM is normalized with the normalized value  $\overset{\cup N}{d}_{ij}$ :

- For benefit criteria (the better is larger),  $\ddot{g}_{ef}^{\ddot{N}} = (\ddot{g}_{ef} - \ddot{g}^-) / (\ddot{g}^+ - \ddot{g}^-)$ . where  $\ddot{g}_f^+ = \max_e(\ddot{g}_{ef})$  and  $\ddot{g}_f^- = \min_e(\ddot{g}_{ef})$  where  $\ddot{g}_f^+$  is the wanted or chosen level, and  $\ddot{g}_f^-$  is the poorest level.
- For cost criteria (the better is smaller),  $\ddot{g}_{ef}^{\ddot{N}} = (\ddot{g}_f^- - \ddot{g}_{ef}) / (\ddot{g}_f^- - \ddot{g}_f^+)$ .

Step 2. Calculation of weighted normalized decision matrix.

The modified ratings are calculated as follows in the weighted NDM:  $\ddot{j}_{ef}^{\ddot{N}} = \ddot{j}_f \times \ddot{g}_{ef}^{\ddot{N}}$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ , where  $\ddot{j}_f$  is the weight of the  $f$  criteria s.t.  $\ddot{j}_f \geq 0$  for  $b = 1, 2, \dots, f$  and  $\sum_{f=1}^b \ddot{j}_f = 1$ .

Step 3. Determination of positive and negative ideal solutions:

$$PIS = \ddot{M}^+ = \{\ddot{m}_1^+, \ddot{m}_2^+, \dots, \ddot{m}_b^+\} = \left\{ \left( \max_f \ddot{m}_{ef} | f \in Q_1 \right), \left( \min_f \ddot{m}_{ef} | f \in Q_2 \right) | f = 1, 2, \dots, b \right\}$$

and

$$NIS = \ddot{M}^- = \{\ddot{m}_1^-, \ddot{m}_2^-, \dots, \ddot{m}_b^-\} = \left\{ \left( \min_f \ddot{m}_{ef} | f \in Q_1 \right), \left( \max_f \ddot{m}_{ef} | f \in Q_2 \right) | f = 1, 2, \dots, b \right\}$$

where  $Q_1$  is the benefit criteria and  $Q_2$  is the cost type criteria.

Step 4. Compute the separation measures for each alternative, e.g., for PIS:

$$\ddot{g}_e^+ = \sqrt{\sum_{f=1}^b (\ddot{m}_{ef} - \ddot{m}_f^+)^2}, e = 1, 2, \dots, a.$$

Similarly, for the NIS the separation values are

$$\ddot{g}_e^- = \sqrt{\sum_{f=1}^b (\ddot{m}_{ef} - \ddot{m}_f^-)^2}, e = 1, 2, \dots, a.$$

Step 5. For alternative  $\ddot{M}_e$  with respect to  $\ddot{M}^+$ , the relative closeness coefficient is:

$$\ddot{N}_e = \frac{\ddot{G}_e^-}{\ddot{G}_e^+ + \ddot{G}_e^-}, e = 1, 2, \dots, a.$$

Step 6. The alternatives ranking: Based on the relative closeness coefficient for an alternative with respect to the ideal alternative, the larger the value of  $\ddot{N}_e$  indicates the better alternative  $\ddot{M}_e$ .

### TOPSIS Method for MADM with SVN Information

With  $\ddot{n}$  alternatives and  $\ddot{m}$  attributes a MADM problem is considered. Let a discrete set of alternatives be  $\ddot{M} = (\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_a)$ , and the set of attributes be  $\ddot{N} = (\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b)$ . The decision maker provided the rating which is performance of alternative  $\ddot{M}_e$  against attribute  $\ddot{N}_e$ . DM also assume that the weight vector  $\ddot{T} = \{\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_b\}$  assigned for the attributes  $\ddot{N} = (\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b)$ . The values related with the alternatives in the following decision matrix the MADM problems can be presented.

$$\ddot{G} = \langle \ddot{g}_{ef} \rangle_{a \times b} = \begin{matrix} & \ddot{N}_1 & \ddot{N}_2 & \dots & \ddot{N}_b \\ \begin{matrix} \ddot{M}_1 \\ \ddot{M}_2 \\ \dots \\ \ddot{M}_a \end{matrix} & \begin{pmatrix} \ddot{g}_{11} & \ddot{g}_{12} & \dots & \ddot{g}_{1b} \\ \ddot{g}_{21} & \ddot{g}_{22} & \dots & \ddot{g}_{2b} \\ \dots & \dots & \dots & \dots \\ \ddot{g}_{a1} & \ddot{g}_{a2} & \dots & \ddot{g}_{ab} \end{pmatrix} \end{matrix}$$

Step 1. The best significant attribute is determined.

Generally, in decision making problems there are many criteria or attributes; some of them are important and others may not be so important. For any decision making scenario it is critical that the proper criteria or attributes are selected. With the help of expert opinions, or another technically sound technique, the best significant attributes may be taken.

Step 2. With SVNSs the decision matrix was constructed.

For a MADM problem, the rating of each substitute w r to each attribute is supposed to be stated as SVNS. In the following decision matrix for MADM problems, the neutrosophic values related with the substitutes can be represented as:

$$\ddot{G}_{\ddot{N}} = \langle \ddot{g}_{ef}^{\ddot{s}} \rangle_{a \times b} = \langle t_{ef}, i_{ef}, f_{ef} \rangle_{a \times b} = \begin{matrix} & \begin{matrix} \langle t_{11}, i_{11}, f_{11} \rangle & \langle t_{12}, i_{12}, f_{12} \rangle & \dots & \langle t_{1b}, i_{1b}, f_{1b} \rangle \\ \langle t_{21}, i_{21}, f_{21} \rangle & \langle t_{22}, i_{22}, f_{22} \rangle & \dots & \langle t_{2b}, i_{2b}, f_{2b} \rangle \\ \dots & \dots & \dots & \dots \\ \langle t_{a1}, i_{a1}, f_{a1} \rangle & \langle t_{a2}, i_{a2}, f_{a2} \rangle & \dots & \langle t_{ab}, i_{ab}, f_{ab} \rangle \end{matrix} \\ \begin{matrix} \dots \\ \ddot{M}_a \end{matrix} \end{matrix}$$

In  $\ddot{G}_{\ddot{N}} = \langle t_{ef}, i_{ef}, f_{ef} \rangle_{a \times b}$ ,  $t_{ef}, i_{ef}, f_{ef}$  denote the degree of the truth-association value, the indeterminacy-association value, and the non-association value of substitute  $\ddot{M}_e$  with respect to attribute  $\ddot{N}_f$  satisfying the following properties:

1.  $0 \leq t_{ef} \leq 1; 0 \leq i_{ef} \leq 1; 0 \leq f_{ef} \leq 1;$
2.  $0 \leq t_{ef} + i_{ef} + f_{ef} \leq 3;$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ .

The neutrosophic cube are best illustrated by Dezert [58], proposed the ranking of each alternative with respect to each of the attributes. The vertices of the neutrosophic cube are  $(1, 0, 0), (0, 0, 0), (0, 0, 1), (0, 1, 0), (1, 1, 0), (0, 1, 1), (1, 0, 1)$  and  $(1, 1, 1)$ . The ratings are divided into three categories as classified by the neutrosophic cube: 1. highly acceptable neutrosophic ratings, 2. tolerable neutrosophic rating, and 3. unacceptable neutrosophic ratings.

**Definition 13.** Highly Acceptable Neutrosophic Ratings: Area of highly acceptable neutrosophic ratings  $\ddot{Y}$  for decision making is represented by the sub-cube  $(\Phi)$  of a neutrosophic

cube ( $\Psi$ ) (i.e.,  $\Phi \subset \Psi$ ). The following eight points are the defined vertices of  $\Phi$  :  $(0.5, 0, 0), (1, 0, 0), (1, 0, 0.5), (0.5, 0, 0.5), (0.5, 0, 0.5), (1, 0, 0.5), (1, 0.5, 0.5)$  and  $\Phi$  :  $(0.5, 0.5, 0.5)$  for MADM,  $\ddot{Y}$  contains all the grades of the substitutes measured with an above average truth-association, below average indeterminacy-association rating, and below average falsity-association rating. In the decision making process,  $\ddot{Y}$  makes a significant contribution and can be defined as  $\ddot{Y} = \langle t_{ef}, i_{ef}, f_{ef} \rangle$ , where  $0.5 < t_{ef} < 1, 0 < i_{ef} < 0.5$  and  $0 < f_{ef} < 0.5$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ .

**Definition 14.** Unacceptable Neutrosophic Ratings: The rankings that are categorized by a 0% association degree, 100% indeterminacy degree, and 100% non-association degree is defined by the area  $\ddot{O}$  of unacceptable neutrosophic ratings  $\ddot{O}$ . Thus, the set of all rankings whose truth-association value is zero can be considered as the set of unacceptable ratings  $\ddot{O} = \langle t_{ef}, i_{ef}, f_{ef} \rangle$ , where  $t_{ef} = 0, 0 < i_{ef} \leq 1$  and  $0 < f_{ef} \leq 1$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ . In the decision making process,  $\ddot{O}$  should not be considered.

**Definition 15.** Tolerable Neutrosophic Ratings: Tolerable neutrosophic rating area  $\Theta (= \Psi \cap \neg\Phi \cap \neg\gamma)$   $\Theta (= \Phi \cap \neg\Phi \cap \neg\gamma)$  can be determined by excluding the area of highly acceptable ratings and unacceptable ratings from a neutrosophic cube. The tolerable neutrosophic rating ( $\ddot{R}$ ) with a below average truth-association degree, above average indeterminacy degree, and above average non-association degree are considered in the DM process. By the following expression  $\ddot{R} = \langle t_{ef}, i_{ef}, f_{ef} \rangle$  where  $0 < t_{ef} < 0.5, 0.5 < i_{ef} < 1$  and  $0.5 < f_{ef} < 1$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ ,  $\ddot{R}$  can be defined.

**Definition 16.** The fuzzification of SVNS  $\ddot{K} = \{(\ddot{h} | \langle t_{\ddot{K}}(\ddot{h}), i_{\ddot{K}}(\ddot{h}), f_{\ddot{K}}(\ddot{h}) \rangle) | \ddot{h} \in \ddot{Y}\}$  can be defined as a method of mapping  $\ddot{K}$  into fuzzy set  $\ddot{P} = \{\ddot{h} | \beta_{\ddot{K}}(\ddot{h}) | \ddot{h} \in \ddot{Y}\}$  i.e.,  $g : \ddot{K} \rightarrow \ddot{P}$  for  $\ddot{h} \in \ddot{Y}$ . From the notion of neutrosophic cube, the illustrative fuzzy association degree  $\beta_{\ddot{K}}(\ddot{h}) \in [0, 1]^1$  of the vector tetrads  $\{(\ddot{h} | \langle t_{\ddot{K}}(\ddot{h}), i_{\ddot{K}}(\ddot{h}), f_{\ddot{K}}(\ddot{h}) \rangle) | \ddot{h} \in \ddot{Y}\}$  is defined. The root mean square of  $1 - t_{\ddot{K}}(\ddot{h}), i_{\ddot{K}}(\ddot{h})$  and  $f_{\ddot{K}}(\ddot{h})$  for all  $\ddot{h} \in \ddot{Y}$  can be obtained by determining it. Therefore, the correspondent fuzzy membership degree is defined as:

$$\beta_{\ddot{K}}(\ddot{h}) = \begin{cases} 1 - \sqrt{\{(1 - t_{\ddot{K}}(\ddot{h}))^2 + i_{\ddot{K}}(\ddot{h})^2 + f_{\ddot{K}}(\ddot{h})^2\}}/3 & \text{for } \forall \ddot{h} \in \ddot{Y} \cup \ddot{R} \\ 0, & \forall \ddot{h} \in \ddot{O} \end{cases} \quad (1)$$

Step 3. The weights of decisionmakers are determined.

Let us assume that the group of  $\ddot{f}$  decision makers has their own decision weights. Thus, in a committee the importance of the DMs may not be equal to each other. Let us assume that the importance of each DM is considered with linguistic variables and stated by NNs. Let the rating of the  $\ddot{l}$ th DM can be demarcated for a NN  $\ddot{M}_{\ddot{l}} = \langle t_{\ddot{l}}, i_{\ddot{l}}, f_{\ddot{l}} \rangle$ . Then, the weight of the  $\ddot{l}$ th DM can be written as:

$$\tilde{\psi}_{\ddot{l}} = \frac{1 - \sqrt{\{(1 - t_{\ddot{l}}(\ddot{h}))^2 + (i_{\ddot{l}}(\ddot{h}))^2 + (f_{\ddot{l}}(\ddot{h}))^2\}}/3}{\sum_{\ddot{l}=1}^{\ddot{f}} \left( 1 - \sqrt{\{(1 - t_{\ddot{l}}(\ddot{h}))^2 + (i_{\ddot{l}}(\ddot{h}))^2 + (f_{\ddot{l}}(\ddot{h}))^2\}}/3 \right)} \text{ and } \sum_{\ddot{l}=1}^{\ddot{f}} \tilde{\psi}_{\ddot{l}} = 1$$

Step 4. Based on DM assessments the aggregated SVNS matrix can be constructed.

Let  $\ddot{G}^{(\ddot{l})} = (\ddot{g}_{ef}^{(\ddot{l})})_{a \times b}$  be the SVN decision matrix of  $\ddot{l}$ th decision maker and  $\tilde{\psi} = (\tilde{\psi}_1, \tilde{\psi}_2, \dots, \tilde{\psi}_{\ddot{f}})^{\ddot{T}}$  be the weight vector of decision maker such that each  $\tilde{\psi}_{\ddot{l}} \in [0, 1]$ . In a GDM method, all the specific assessments need to be joined into a group opinion to make an aggregated

neutrosophic DM. Ye [22] proposed the SVNWA aggregation operator, which is obtained by using this aggregated matrix for SVNSs as follows:

$$\ddot{G} = \left( \ddot{g}_{ef} \right)_{a \times b}$$

where

$$\begin{aligned} \ddot{g}_{ef} &= SVNWA_{\tilde{\psi}} \left( \ddot{g}_{ef}^{(1)}, \ddot{g}_{ef}^{(2)}, \dots, \ddot{g}_{ef}^{(\tilde{f})} \right) = \tilde{\psi}_1 \ddot{g}_{ef}^{(1)} \oplus \tilde{\psi}_2 \ddot{g}_{ef}^{(2)} \oplus \dots \oplus \tilde{\psi}_{\tilde{f}} \ddot{g}_{ef}^{(\tilde{f})} \\ &= \left\langle 1 - \prod_{i=1}^{\tilde{f}} \left( 1 - t_{ef}^{(\tilde{f})} \right)^{\tilde{\psi}_i}, \prod_{i=1}^{\tilde{f}} \left( i_{ef}^{(\tilde{f})} \right)^{\tilde{\psi}_i}, \prod_{i=1}^{\tilde{f}} \left( f_{ef}^{(\tilde{f})} \right)^{\tilde{\psi}_i} \right\rangle. \end{aligned}$$

Therefore, the ANDM is well-defined as follows:

$$\ddot{G} = \left\langle \ddot{g}_{ef} \right\rangle_{a \times b} = \left\langle t_{ef}, i_{ef}, f_{ef} \right\rangle_{a \times b}$$

where  $\ddot{G} = \left\langle t_{ef}, i_{ef}, f_{ef} \right\rangle$  is the aggregated element of NDM  $\ddot{G}$  for  $e = 1, 2, \dots, a$  and  $f = 1, 2, \dots, b$ .

Step 5. The weight of the attribute is determined.

DMs may feel that all features are not equally important in the DM process. Thus, regarding attribute weights, every DM may have a unique view. To get the grouped opinion of the picked attribute all DM views on the importance of each attribute must be aggregated. Let  $\tilde{\psi}_i = (\tilde{\psi}_i^{(1)}, \tilde{\psi}_i^{(2)}, \dots, \tilde{\psi}_i^{(\tilde{f})})$  be the NN assigned to the attribute  $\ddot{N}_f$  by the  $\tilde{i}$  the DM. By using the SVNWA aggregation operator [59], the combined weight  $\ddot{T} = \{\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_b\}$  of the attribute can be determined by Equation (2)

$$\begin{aligned} \ddot{t}_f &= SVNWA_{\tilde{\psi}} \left( \ddot{t}_f^{(1)}, \ddot{t}_f^{(2)}, \dots, \ddot{t}_f^{(\tilde{f})} \right) = \tilde{\psi}_1 \ddot{t}_f^{(1)} \oplus \tilde{\psi}_2 \ddot{t}_f^{(2)} \oplus \dots \oplus \tilde{\psi}_{\tilde{f}} \ddot{t}_f^{(\tilde{f})} \\ &= \left\langle 1 - \prod_{i=1}^{\tilde{f}} \left( 1 - t_f^{(\tilde{f})} \right)^{\tilde{\psi}_i}, \prod_{i=1}^{\tilde{f}} \left( i_f^{(\tilde{f})} \right)^{\tilde{\psi}_i}, \prod_{i=1}^{\tilde{f}} \left( f_f^{(\tilde{f})} \right)^{\tilde{\psi}_i} \right\rangle \end{aligned} \quad (2)$$

$\ddot{T} = \{\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_b\}$  where,  $\ddot{t}_f = \left\langle t_f, i_f, f_f \right\rangle$  for  $f = 1, 2, \dots, b$ .

Step 6. Aggregation of the weighted neutrosophic DM.

In this portion, to create the AWN decision matrix, the attained weights of the attributes and aggregated neutrosophic DM needs to be combined and integrated. The multiplication Formulae (2) of two neutrosophic sets can be obtained by using the AWNDM, which is defined as follows:

$$\ddot{G} \otimes \ddot{T} = \ddot{G}^{\ddot{T}} = \left\langle \ddot{t}_{ef}^{\ddot{T}} \right\rangle_{a \times b} = \left\langle t_{ef}^{\ddot{T}}, i_{ef}^{\ddot{T}}, f_{ef}^{\ddot{T}} \right\rangle_{a \times b}$$

Here, the aggregated weighted neutrosophic decision matrix  $\ddot{G}^{\ddot{T}}$  have an element

$$\ddot{t}_{ef}^{\ddot{T}} = \left\langle t_{ef}^{\ddot{T}}, i_{ef}^{\ddot{T}}, f_{ef}^{\ddot{T}} \right\rangle_{a \times b} \text{ for } e = 1, 2, \dots, a \text{ and } f = 1, 2, \dots, b.$$

Step 7. For SVNSs the RPIS and the RNIS is determined.

With respect to the alternative  $\ddot{M}_e$  for the attribute  $\ddot{N}_f$  let  $\ddot{G}_N = \left\langle \ddot{t}_{ef}^{\ddot{T}} \right\rangle_{a \times b} = \left\langle t_{ef}, i_{ef}, f_{ef} \right\rangle_{a \times b}$  be a SVNS-based decision matrix, where  $t_{ef}$ ,  $i_{ef}$  and  $f_{ef}$  are the association degree, indeterminacy degree, and non-association degree of valuation.

In practice, two multi attribute decision making problem attribute types exist: benefit type attribute (BTA) and cost type attribute (CTA) exist.

**Definition 17.** Let the BTA and the CTA are  $J_1$  and  $J_2$  respectively.  $\ddot{Q}_N^+$  is the RNPIS and  $\ddot{Q}_N^-$  is the RNNIS. Then  $\ddot{Q}_N^+$  can be defined as follows:

$$\ddot{Q}_N^+ = [\ddot{g}_1^+, \ddot{g}_2^+, \dots, \ddot{g}_a^+]$$

where  $\ddot{g}_f^+ = \langle t_f^+, i_f^+, f_f^+ \rangle$  for  $f = 1, 2, \dots, b$ , and

$$\begin{aligned} \chi_f^+ &= \left\{ \left( \max_e \{t_{ef}^+\} | f \in J_1 \right), \left( \min_e \{t_{ef}^+\} | f \in J_2 \right) \right\} \\ \kappa_f^+ &= \left\{ \left( \min_f \{\kappa_{ef}^+\} | f \in J_1 \right), \left( \max_e \{i_{ef}^+\} | f \in J_2 \right) \right\} \\ \rho_f^+ &= \left\{ \left( \min_f \{f_{ef}^+\} | f \in J_1 \right), \left( \max_f \{f_{ef}^+\} | f \in J_2 \right) \right\} \end{aligned}$$

$\ddot{Q}_N^-$  can be defined by  $\ddot{Q}_N^- = [\ddot{g}_1^-, \ddot{g}_2^-, \dots, \ddot{g}_a^-]$ , where  $\ddot{g}_f^- = \langle t_f^-, i_f^-, f_f^- \rangle$  for  $f = 1, 2, \dots, b$ , and

$$\begin{aligned} t_f^- &= \left\{ \left( \max_f \{t_{ef}^-\} | f \in J_1 \right), \left( \min_e \{t_{ef}^-\} | f \in J_2 \right) \right\} \\ i_f^- &= \left\{ \left( \min_e \{i_{ef}^-\} | f \in J_1 \right), \left( \max_e \{i_{ef}^-\} | f \in J_2 \right) \right\} \\ f_f^- &= \left\{ \left( \min_e \{f_{ef}^-\} | f \in J_1 \right), \left( \max_e \{f_{ef}^-\} | f \in J_2 \right) \right\} \end{aligned}$$

Step 8. From the RNPIS and the RNNIS, the distance value of each alternative for SVNSSs is determined.

From the RNPIS  $\langle t_f^+, i_f^+, f_f^+ \rangle$  for  $e = 1, 2, \dots, a, f = 1, 2, \dots, b$  the normalized Euclidean distance measure of each alternative  $\langle t_{ef}^+, i_{ef}^+, f_{ef}^+ \rangle$  can be written as follows:

$$\ddot{G}_{Eu}^+(\ddot{g}_{ef}^+, \ddot{g}_f^+) = \sqrt{\frac{1}{3b} \sum_{f=1}^b \left\{ \left( t_{ef}^+(\ddot{h}_f) - t_f^+(\ddot{h}_f) \right)^2 + \left( i_{ef}^+(\ddot{h}_f) - i_f^+(\ddot{h}_f) \right)^2 + \left( f_{ef}^+(\ddot{h}_f) - f_f^+(\ddot{h}_f) \right)^2 \right\}}.$$

Similarly, from the RNNIS  $\langle t_f^-, i_f^-, f_f^- \rangle$  the normalized Euclidean distance measure of each alternative  $\langle t_{ef}^-, i_{ef}^-, f_{ef}^- \rangle$  can be written as:

$$\ddot{G}_{Eu}^-(\ddot{g}_{ef}^-, \ddot{g}_f^-) = \sqrt{\frac{1}{3b} \sum_{f=1}^b \left\{ \left( t_{ef}^-(\ddot{h}_f) - t_f^-(\ddot{h}_f) \right)^2 + \left( i_{ef}^-(\ddot{h}_f) - i_f^-(\ddot{h}_f) \right)^2 + \left( f_{ef}^-(\ddot{h}_f) - f_f^-(\ddot{h}_f) \right)^2 \right\}}.$$

Step 9. For SVNSSs the relative closeness coefficient to the NIS is determined.

With respect to the NPIS  $\ddot{Q}_N^+$  the relative closeness coefficient for each alternative  $\ddot{M}_e$  is as defined below:

$$\ddot{N}_e^* = \frac{\ddot{G}_{Eu}^-(\ddot{g}_{ef}^-, \ddot{g}_f^-)}{\ddot{G}_{Eu}^+(\ddot{g}_{ef}^+, \ddot{g}_f^+) + \ddot{G}_{Eu}^-(\ddot{g}_{ef}^-, \ddot{g}_f^-)},$$

where  $0 \leq \ddot{N}_e^* \leq 1$ .

Step 10. Ranking the alternatives

Larger values of  $\ddot{N}_e^*$  reflect better alternative  $\ddot{M}_e$  for  $e = 1, 2, \dots, a$ , according to the relative closeness coefficient values.

#### 4.2. Interval Neutrosophic Set

##### Advantage

The interval-based belonging structure of the INS permits users to record their hesitancy in conveying values for the different components of the belonging function. This makes it more fit to be used in modeling the uncertain, unspecified, and inconsistent information that are commonly found in the most real-life scientific and engineering applications.

##### Algorithm 2

##### An Extended TOPSIS Method for MADM Based on INSs

Let a discrete set of alternatives be  $\ddot{M} = (\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_a)$ , the set of attributes be  $\ddot{N} = (\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b)$ , the weighting vector of the attributes be  $\ddot{T} = (\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_b)$  and meet  $\sum_{f=1}^b \ddot{t}_f = 1, \ddot{t}_f \geq 0$ , where  $\ddot{t}_f$  is unknown for a MADM problem. Suppose that  $\ddot{Y} = [\ddot{h}_{ef}]_{a \times b}$  is the decision matrix, where  $\ddot{h}_{ef} = \left( [t_{ef}^L, t_{ef}^U], [i_{ef}^L, i_{ef}^U], [t_{ef}^L, t_{ef}^U] \right)$  taking the form of the INVs for substitute  $\ddot{M}_a$  with respect to feature  $\ddot{N}_b^*$ .

On these conditions, the steps involved in determining the ranking of the alternatives built on the algorithm is presented as follows:

Step 1. Standardized decision matrix.

In common, there are 2 kinds of features: the BT and the CT. For BTAs, higher attribute values indicate better alternatives. For CTAs, higher attribute values indicate worse alternatives.

We need to convert the CT to a BT in order to remove the effect of the attribute type. Assume the identical matrix is stated by  $\ddot{R} = [\ddot{r}_{ef}]_{a \times b}$  where  $\ddot{r}_{ef} = \left( [t_{ef}^L, t_{ef}^U], [i_{ef}^L, i_{ef}^U], [t_{ef}^L, t_{ef}^U] \right)$ .

Then we have

$$\begin{cases} \ddot{r}_{ef} = \ddot{h}_{ef} & \text{if the attributes } f \text{ is BT} \\ \ddot{r}_{ef} = \ddot{\bar{h}}_{ef} & \text{if the attributes } f \text{ is CT} \end{cases}$$

where  $\ddot{\bar{h}}$  is the complement of  $\ddot{h}$ .

Step 2. Calculate attribute weights.

We need to define the attribute weights because they are completely unknown. For MADM problems Wang [59] proposed the maximizing deviation process to define the feature weights with numerical information. Following the principle of this method is termed. If an attribute has a small value for all of the substitutes, then this attribute has a very small effect on MADM problem. In this case, in ranking of the substitutes the attribute will only play a small role. Further, the attribute has no effect on the ranking results if the attribute values, for all substitutes are equal. Conversely, such a feature will show a significant part in ranking the substitutes if the feature values for all substitutes under a feature have clear changes. For a given attribute if the attribute values of all substitutes have small deviations, we can allot a small weight for the feature; otherwise, the feature that makes higher deviations should be allotted a larger weight. With respect to a specified feature, if the feature values of all substitutes are equal, then the weight of such a feature may be set to zero.

The deviation values of substitute  $\ddot{M}_e$  to all the other alternatives under the  $\ddot{N}_f$  can be defined for a MADM problem as  $\ddot{G}_{ef}(\ddot{t}_f) = \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf}) \ddot{t}_f$ , then

$$\ddot{G}_f(\ddot{t}_f) = \sum_{e=1}^a \ddot{G}_{ef}(\ddot{t}_f) = \sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf}) \ddot{t}_f$$

denotes the total deviation values of all substitutes to the other substitutes for the attribute  $\ddot{N}_f$ . The value of  $\ddot{G}_f(\ddot{t}_f) = \sum_{e=1}^a \ddot{G}_f(\ddot{t}_f) = \sum_{f=1}^b \sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf}) \ddot{t}_f$ , represent the deviation of all features for all alternatives to the other alternatives. The augmented model is created as follows:

$$\ddot{G}_f(\ddot{t}_f) = \sum_{e=1}^a \ddot{G}_f(\ddot{t}_f) = \sum_{f=1}^b \sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf}) \ddot{t}_f = \begin{cases} \max \ddot{G}(\ddot{t}_f) = \sum_{f=1}^b \sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf}) \ddot{t}_f \\ s.t. \sum_{f=1}^b \ddot{t}_f^2, \ddot{t}_f \geq 0, f = 1, 2, \dots, b \end{cases}$$

Then, we obtain

$$\ddot{t}_f = \frac{\sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf})}{\sqrt{\sum_{f=1}^b \sum_{e=1}^a \sum_{l=1}^a \ddot{g}^2(\ddot{r}_{ef}, \ddot{r}_{lf})}}$$

Furthermore, based on this model we can obtain the normalized attribute weight:

$$\ddot{t}_f = \frac{\sum_{e=1}^a \sum_{l=1}^a \ddot{g}(\ddot{r}_{ef}, \ddot{r}_{lf})}{\sqrt{\sum_{f=1}^b \sum_{e=1}^a \sum_{l=1}^a \ddot{g}^2(\ddot{r}_{ef}, \ddot{r}_{lf})}}$$

Step 3. To rank the alternatives use the extended TOPSIS process.

The finest substitute should have the shortest distance to the PIS and the extreme distance to the NIS. This is the basic principle of TOPSIS. The finest solution is that for which each attribute value is the best one of all alternatives in the PIS (labeled as  $\ddot{O}^+$ ). Similarly, the nastiest solution for which each attribute value is the nastiest value of all alternatives is the NIS (labeled as  $\ddot{O}^-$ ). Using the extended TOPSIS the steps of ranking the alternatives are presented as follows.

1. Compute the weighted matrix

$$\ddot{Y} = (\ddot{y}_{ef})_{a \times b} = \begin{bmatrix} \ddot{t}_1 \ddot{r}_{11} & \ddot{t}_2 \ddot{r}_{12} & \dots & \ddot{t}_b \ddot{r}_{1b} \\ \ddot{t}_1 \ddot{r}_{21} & \ddot{t}_2 \ddot{r}_{22} & \dots & \ddot{t}_b \ddot{r}_{2b} \\ \dots & \dots & \dots & \dots \\ \ddot{t}_1 \ddot{r}_{a1} & \ddot{t}_2 \ddot{r}_{a2} & \dots & \ddot{t}_b \ddot{r}_{ab} \end{bmatrix},$$

where  $\ddot{y}_{ef} = \left( \left[ \ddot{t}_{ef}^L, \ddot{t}_{ef}^U \right], \left[ \ddot{i}_{ef}^L, \ddot{i}_{ef}^U \right], \left[ \ddot{f}_{ef}^L, \ddot{f}_{ef}^U \right] \right)$ .

2. The PIS and NIS is determined.

We can define the absolute PIS and NIS according to the definition of INV, which is shown below.

$$\begin{cases} \ddot{y}_f^+ = ([1, 1], [0, 0], [0, 0]) \\ \ddot{y}_f^- = ([0, 0], [1, 1], [1, 1]) \end{cases} \quad f = 1, 2, \dots, b$$

Alternatively, we can pick the virtual PIS and NIS from all alternatives by picking the finest values for each attribute.

$$\begin{cases} \ddot{y}_f^+ = \left( \left[ \max_e \ddot{t}_{ef}^L, \max_e \ddot{t}_{ef}^U \right], \left[ \min_e \ddot{i}_{ef}^L, \min_e \ddot{i}_{ef}^U \right], \left[ \min_e \ddot{f}_{ef}^L, \min_e \ddot{f}_{ef}^U \right] \right) \\ \ddot{y}_f^- = \left( \left[ \min_e \ddot{t}_{ef}^L, \min_e \ddot{t}_{ef}^U \right], \left[ \max_e \ddot{i}_{ef}^L, \max_e \ddot{i}_{ef}^U \right], \left[ \max_e \ddot{f}_{ef}^L, \max_e \ddot{f}_{ef}^U \right] \right) \end{cases}$$

3. Compute the distance between the alternative  $\ddot{M}_e$  and PIS/NIS.

The distance between the alternative  $\ddot{M}_e$  and PIS/ NIS is described as follows:

$$\begin{cases} \ddot{g}_e^+ = \sum_{f=1}^b \ddot{g}(\ddot{y}_{ef}, \ddot{y}_f^+) \\ \ddot{g}_e^- = \sum_{f=1}^b \ddot{g}(\ddot{y}_{ef}, \ddot{y}_f^-) \end{cases} \quad e = 1, 2, \dots, a$$

4. The relative closeness coefficient is calculated as follows:

$$RCC_e = \frac{\ddot{g}_e^+}{\ddot{g}_e^- + \ddot{g}_e^+} (e = 1, 2, \dots, a)$$

5. Rank the alternatives.

To rank the alternatives the relative nearness coefficient is utilized. The smaller  $RCC_e$  is, the better alternative  $\ddot{M}_e$  is.

#### 4.3. Bipolar Neutrosophic Set

##### Algorithm 3

##### TOPSIS Method for MADM with Bipolar Neutrosophic Information

To address MADM problems under a bipolar neutrosophic environment, an approach based on TOPSIS method is utilized. Let be a discrete set of  $x$  possible substitutes be  $\ddot{M} = \{\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_a\}$ , ( $a \geq 2$ ), a set of features under consideration be  $\ddot{N} = \{\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b\}$ , ( $b \geq 2$ ) and the unknown weight vector of the features be  $\ddot{T} = \{\ddot{T}_1, \ddot{T}_2, \dots, \ddot{T}_b\}^T$  with  $0 \leq \ddot{T}_f \leq 1$  or  $\sum_{f=1}^b \ddot{T}_f = 1$ . The ranking of the performance value of alternative  $\ddot{M}$  ( $e = 1, 2, \dots, a$ ) with respect to the predefined feature  $\ddot{N}$  ( $f = 1, 2, \dots, b$ ) is presented by the DM, and they can be stated by BNNs. Therefore, using the following steps the suggested method is obtained:

Step 1. Construction of decision matrix with BNNs.

The ranking of the presentation value of alternative  $\ddot{M}$  ( $e = 1, 2, \dots, a$ ) with respect to the feature  $\ddot{N} = \{\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b\}$ , ( $b \geq 2$ ) is stated by BNNs and they can be obtained in the decision matrix  $\langle \widetilde{\ddot{r}}_{ef} \rangle_{a \times b}$ . Here,  $\ddot{r}_{ef}^{t_e} = \langle t_{ef}^{t_f^+}, i_{ef}^{t_f^+}, f_{ef}^{t_f^+}, t_{ef}^{t_f^-}, i_{ef}^{t_f^-}, f_{ef}^{t_f^-} \rangle$ .

Step 2. Determination of weights of the attributes.

The weight of the attribute  $\ddot{N}_f$  is defined as shown below:

$$\ddot{T}_f^* = \frac{\sum_{e=1}^a \sum_{k=1}^a z(\ddot{r}_{ef}, \ddot{r}_{kf})}{\sqrt{\sum_{f=1}^b \left( \sum_{e=1}^a \sum_{k=1}^a z(\ddot{r}_{ef}, \ddot{r}_{kf}) \right)}} \quad (3)$$

and the normalized weight of the feature  $\ddot{N}_f$  is defined as shown below:

$$\ddot{T}_f^* = \frac{\sum_{e=1}^a \sum_{k=1}^a \ddot{z}(\ddot{r}_{ef}, \ddot{r}_{kf})}{\sqrt{\sum_{f=1}^b \left( \sum_{e=1}^a \sum_{k=1}^a \ddot{z}(\ddot{r}_{ef}, \ddot{r}_{kf}) \right)}} \quad (4)$$

Step 3. Construction of weighted decision matrix.

By multiplying the weights of the features and the accumulated decision matrixes obtained by the accumulated weighted decision matrix

$$\langle \ddot{r}_{ef} \rangle_{a \times b} \otimes \ddot{t}_{ef} = \langle \ddot{r}_{ef}^{\ddot{t}_{ef}} \rangle_{a \times b}$$

$$\ddot{r}_{ef}^{\ddot{t}_{ef}} = \langle t_{ef}^{t_{ef}^+}, i_{ef}^{t_{ef}^+}, f_{ef}^{t_{ef}^+}, t_{ef}^{t_{ef}^-}, i_{ef}^{t_{ef}^-}, f_{ef}^{t_{ef}^-} \rangle \text{ with } t_{ef}^{t_{ef}^+}, i_{ef}^{t_{ef}^+}, f_{ef}^{t_{ef}^+}, t_{ef}^{t_{ef}^-}, i_{ef}^{t_{ef}^-}, f_{ef}^{t_{ef}^-} \in [0, 1], e = 1, 2, \dots, a; f = 1, 2, \dots, b.$$

Step 4. Classify the BNRPIs and BNRNIs.

Step 5. From BNRPIs and BNRNIs the distance of each substitute is calculated.

Step 6. Evaluate the relative closeness coefficient of each substitute  $M_e$  ( $e = 1, 2, \dots, a$ ) by taking into consideration the BNRPIs and BNRNIs.

Step 7. Rank the substitutes.

Rank the substitutes according to the descending order of the substitutes. The substitute with the largest value of the relative closeness coefficient is the best substitute for the problem.

#### 4.4. Refined Neutrosophic Set

Using a tangent function, a neutrosophic refined similarity measure was proposed by Mondal and Pramanik [41] and they applied it to MADM. Other notable works in this area are due to Pramanik et al. [43], who applied the neutrosophic refined similarity measure in a (MCGDM) problem related to teacher selection. Nadaban and Dzitac [60] on the other hand, presented an overview of the research related to the TOPSIS method based on neutrosophic sets, and the applications of TOPSIS methods in neutrosophic environments [43].

#### Advantage

A neutrosophic refined set can be applied to further physical MAGDM problems in RN environments, such as engineering, a banking system project, and organizations in the IT sectors. For MAGDM in a RN environment, this proposed approach is a new path that has the potential to be explored further.

#### Algorithm 4

##### TOPSIS Approach for MAGDM with NRS [31]

Step 1. Let us consider a group of  $\ddot{s}$  decision makers  $(\ddot{G}_1, \ddot{G}_2, \dots, \ddot{G}_{\ddot{s}})$  and  $\ddot{t}$  attributes  $(\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_{\ddot{t}})$

Step 2. Conversion of neutrosophic weight to real values.

The  $\ddot{s}$  decision makers have their own neutrosophic decision weight  $(\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_{\ddot{s}})$ . A neutrosophic number is represented by  $\ddot{t}_k = \langle \chi_k, \kappa_k, \rho_k \rangle$ . Using Equation (5), the equivalent crisp weight can be obtained:

$$\ddot{t}_k^c = \frac{1 - \sqrt{((1 - t_k)^2 + (i_k)^2 + (f_k)^2)/3}}{\sum_{k=1}^{\ddot{s}} \left\{ 1 - \sqrt{((1 - t_k)^2 + (i_k)^2 + (f_k)^2)/3} \right\}} \quad (5)$$

where  $\ddot{t}_k^c \geq 0$ ,  $\sum_{k=1}^{\ddot{s}} \ddot{t}_k^c = 1$ .

Step 3. Construction of ADM.

The ANDM can be created as follows:

	$\ddot{N}_1$	$\ddot{N}_2$	$\cdots$	$\ddot{N}_f$
$\ddot{M}_1$	$\ddot{g}_{11}$	$\ddot{g}_{12}$	$\cdots$	$\ddot{g}_{1f}$
$\ddot{M}_2$	$\ddot{g}_{21}$	$\ddot{g}_{22}$	$\cdots$	$\ddot{g}_{2f}$
$\cdots$	$\cdots$	$\cdots$	$\cdots$	$\cdots$
$\ddot{M}_e$	$\ddot{g}_{e1}$	$\ddot{g}_{e2}$	$\cdots$	$\ddot{g}_{ef}$

#### Step 4. Description of weights of attributes

On all attributes in a DM scenario, DMs would not like to place identical importance. Thus, regarding the weights of feature, each DM would have different opinions. By the aggregation operator for a specific attribute, all DM views need to be aggregated for a grouped opinion. The weight matrix can be written as follows:

	$\ddot{N}_1$	$\ddot{N}_2$	$\cdots$	$\ddot{N}_f$
$\ddot{M}_1$	$\ddot{t}_{11}$	$\ddot{t}_{12}$	$\cdots$	$\ddot{t}_{1f}$
$\ddot{M}_2$	$\ddot{t}_{21}$	$\ddot{t}_{22}$	$\cdots$	$\ddot{t}_{2f}$
$\cdots$	$\cdots$	$\cdots$	$\cdots$	$\cdots$
$\ddot{M}_e$	$\ddot{t}_{e1}$	$\ddot{t}_{e2}$	$\cdots$	$\ddot{t}_{ef}$

Here  $\ddot{t}_{ef} = \langle t_{ef}, i_{ef}, f_{ef} \rangle$ .

For the attribute  $\ddot{N}_f$  the aggregated weight is defined as follows:

$$\overline{\ddot{t}_f} = \left\langle \prod_{e=1}^{\ddot{s}} t_{ef}, \prod_{e=1}^{\ddot{s}} i_{ef}, \prod_{e=1}^{\ddot{s}} f_{ef} \right\rangle = \langle \overline{t_f}, \overline{i_f}, \overline{f_f} \rangle, f = 1, 2, \dots, g.$$

#### Step 5. Construction of AWDM.

The AWND matrix can be made as:

	$\ddot{N}_1$	$\ddot{N}_2$	$\cdots$	$\ddot{N}_f$
$\ddot{M}_1$	$\overline{\ddot{t}_1 \ddot{g}_{11}}$	$\overline{\ddot{t}_1 \ddot{g}_{12}}$	$\cdots$	$\overline{\ddot{t}_1 \ddot{g}_{1f}}$
$\ddot{M}_2$	$\overline{\ddot{t}_2 \ddot{g}_{21}}$	$\overline{\ddot{t}_2 \ddot{g}_{22}}$	$\cdots$	$\overline{\ddot{t}_2 \ddot{g}_{2f}}$
$\cdots$	$\cdots$	$\cdots$	$\cdots$	$\cdots$
$\ddot{M}_e$	$\overline{\ddot{t}_e \ddot{g}_{e1}}$	$\overline{\ddot{t}_e \ddot{g}_{e2}}$	$\cdots$	$\overline{\ddot{t}_e \ddot{g}_{ef}}$

#### Step 6. RPIS and RNIS.

Step 7. Determination of distances of each substitute from the RPIS and the RNIS.

Use the normalized Euclidean distance.

Step 8. Calculation of relative closeness coefficient.

Step 9. Ranking of alternatives.

The best substitute is the one for which the nearness coefficient is the lowermost.

#### Aggregation operator [45]

There are  $h$  alternatives in the present problem. The aggregation operator [45] functional to the neutrosophic refined set is defined as follows:

$$\ddot{P}(\ddot{G}_1, \ddot{G}_2, \dots, \ddot{G}_a) = \left\langle \prod_{e=1}^a (t_{ef}^k)^{\ddot{i}_e}, \prod_{e=1}^a (i_{ef}^k)^{\ddot{i}_e}, \prod_{e=1}^a (f_{ef}^k)^{\ddot{i}_e} \right\rangle$$

$$\ddot{g}_{kf} = \left\langle \prod_{e=1}^a (t_{ef}^k)^{\ddot{i}_e}, \prod_{e=1}^a (i_{ef}^k)^{\ddot{i}_e}, \prod_{e=1}^a (f_{ef}^k)^{\ddot{i}_e} \right\rangle, \text{ or } \ddot{g}_{kf} = \langle t_{kf}, i_{kf}, f_{kf} \rangle$$

where  $e = 1, 2, \dots, a$ ;  $f = 1, 2, \dots, b$ .

### Aggregation of Triangular Fuzzy Neutrosophic Set [45]

The SVNS model has attracted the attention of many researchers since it was first introduced by Wang et al. [4]. Since its inception, the SVNS model has been actively applied in numerous diverse areas such as engineering, economics, medical diagnosis, and MADM problems. For MADM the aggregation of SVNS information becomes a significant research topic in terms of SVNSs in which the rating values of substitutes are stated. Aggregation operators of SVNSs usually taking the form of mathematical functions are commonly used to fuse all the input individual data that are typically interpreted as the truth, indeterminacy, and the non-association degree in SVNS into a single one. In MADM problems, application of SVNS has been extensively studied.

However, the truth-association, indeterminacy-association, and non-association degrees of SVNS cannot be characterized with exact real numbers or interval numbers in uncertain and complex situations. Moreover, rather than interval number, a TFN can effectively manage fuzzy data. Therefore, in decision making problems for handling incomplete, indeterminacy, and uncertain information a combination of a triangular fuzzy number with SVNS can be used as an effective tool. In this regard, Ye [48] defined a TFNS and developed TFNNWAA operators, and TFNNWGA operators to solve MADM problems. The process for ATFIF information and its application to DM were presented by Zhang and Liu [46]. However, decision making problems that involve indeterminacy cannot address their approach. Thus, a new method is required to handle indeterminacy.

#### 4.5. Triangular Fuzzy Number Neutrosophic Set

The TFNNS model introduced by Biswas [45] combines triangular fuzzy numbers (TFNs) with SVNSs to develop a triangular fuzzy number neutrosophic set (TFNNS) in which the truth, indeterminacy, and non-association functions are expressed in terms of TFNs.

#### Aggregation of Triangular Fuzzy Number Neutrosophic Sets

**Definition 18.** Suppose that a collection of real numbers are  $\ddot{T} : (\ddot{R}\ddot{e})^n \rightarrow \ddot{R}\ddot{e}$  and  $\ddot{a}_f (f = 1, 2, \dots, b)$ . The weighted averaging operator  $\ddot{T}\ddot{A}_f$  is defined as  $\ddot{T}\ddot{A}_f(\ddot{a}_1, \ddot{a}_2, \dots, \ddot{a}_f) = \sum_{f=1}^b \ddot{t}_f \ddot{a}_f$ , where  $\ddot{R}\ddot{e}$  is the set of real numbers,  $\ddot{t} = (\ddot{t}_1, \ddot{t}_2, \dots, \ddot{t}_b)^T$  is the weighted vector of  $A_f (f = 1, 2, \dots, b)$  such that  $\ddot{t}_f \in [0, 1] (f = 1, 2, \dots, b)$  and  $\sum_{f=1}^b \ddot{t}_f = 1$ .

#### Triangular Fuzzy Number Neutrosophic Arithmetic Averaging Operator

**Definition 19.** Suppose that a collection of TFNNVs in the set of real numbers is  $\ddot{K}_f = \langle (\alpha_f, \beta_f, \gamma_f), (\mu_f, \nu_f, \rho_f), (\chi_f, \lambda_f, \delta_f) \rangle (f = 1, 2, \dots, b)$ , and let  $TFNNWA : \ddot{\Theta}^b \rightarrow \ddot{\Theta}$ . The triangular fuzzy number neutrosophic weighted averaging (TFNNWA) operator denoted by  $TFNNWA(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b)$  and is defined as:

$$TFNNWA(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b) = \ddot{t}_1 \ddot{M}_1 \hat{\oplus} \ddot{t}_2 \ddot{M}_2 \hat{\oplus} \dots \hat{\oplus} \ddot{t}_b \ddot{M}_b = \hat{\oplus}_{f=1}^b (\ddot{t}_f \ddot{M}_f),$$

where  $\ddot{t}_f \in [0, 1]$  is the weight vector of  $\ddot{M}_f (f = 1, 2, \dots, b)$  such that  $\sum_{f=1}^b \ddot{t}_f = 1$ .

In specific, if  $\ddot{t} = (1/f, 1/f, \dots, 1/f)^T$ , then the operator reduces to the TFNNA operator:

$$TFNNWG_{\ddot{t}}(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b) = \ddot{M}_1 \ddot{t}_1 \hat{\otimes} \ddot{M}_1 \ddot{t}_2 \hat{\otimes} \dots \hat{\otimes} \ddot{M}_1 \ddot{t}_b.$$

### Triangular Fuzzy Number Neutrosophic Geometric Averaging Operator

**Definition 20.** Suppose that a collection of TFNNVs in the set of real numbers is  $\ddot{K}_f = \langle (\alpha_f, \beta_f, \gamma_f), (\mu_f, \nu_f, \rho_f), (\chi_f, \lambda_f, \delta_f) \rangle (f = 1, 2, \dots, b)$ , and let  $TFNNWG : \ddot{\Theta}^a \rightarrow \ddot{\Theta}$ . The TFNNWG operator is denoted by  $TFNNWG_w(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b)$  and is defined as  $TFNNWG_w(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b) = \ddot{M}_1^{\ddot{t}_1} \otimes \ddot{M}_2^{\ddot{t}_2} \otimes \dots \otimes \ddot{M}_b^{\ddot{t}_b} = \bigotimes_{f=1}^b (\ddot{M}_f^{\ddot{t}_f})$ , where  $\ddot{t}_f \in [0, 1]$  is the exponential weight vector of  $\ddot{M}_f (f = 1, 2, \dots, b)$  such that  $\sum_{f=1}^b \ddot{t}_f = 1$ . In particular, if  $\ddot{t} = (1/f, 1/f, \dots, 1/f)^T$ , then the  $TFNNWG_w(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_b)$  operator reduces to the TNFG operator denoted as  $TFNNWA(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_f) = (\ddot{M}_1 \otimes \ddot{M}_2 \otimes \dots \otimes \ddot{M}_f)^{\frac{1}{f}}$ .

#### Advantage

The triangular fuzzy number neutrosophic values of the aggregation operator have been studied. However, to deal with uncertain information, this number can be used as an operative tool.

#### Algorithm 5

Application of TFNNWA and TFNNWG operators to multi attribute decision making in which  $\ddot{M} = \{\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_a\}$  is the set of possible substitutes and  $\ddot{N} = \{\ddot{N}_1, \ddot{N}_2, \dots, \ddot{N}_b\}$  is the set of features. Assume that  $\ddot{t} = (1/f, 1/f, \dots, 1/f)^T$  is the normalized weights of the features, where  $\ddot{t}_f$  denotes the importance degree of the feature  $\ddot{U} = (\ddot{h}_{ef})_{a \times b} M_f (f = 1, 2, \dots, b)$  such that  $\ddot{t}_f \geq 0$  and  $\sum_{f=1}^b \ddot{t}_f = 1$  for  $(f = 1, 2, \dots, b)$ . The ratings of all alternatives  $\ddot{M}_e (e = 1, 2, \dots, a)$  with respect to the features  $\ddot{M}_v (v = 1, 2, \dots, y)$  have been presented in a TFNNV based decision matrix  $\ddot{U} = (\ddot{h}_{uv})_{x \times y}$ .

Based on the TFNNWA and TFNNWG operators, for solving MADM problems we develop a practical approach. In this approach, the ratings of the alternatives over the attributes are expressed with TFNNVs (Figure 1).

#### Application of the TFNNWA Operator

Step 1. Aggregate the rating values of the substitute  $Y_u (u = i, ii, iii, iv)$  defined in the  $u$ -th row of decision matrix  $\ddot{k} = (\ddot{k}_{ef})_{4 \times 5}$  with the TFNNWA operator.

Step 2. The aggregated rating values  $\ddot{h}_u$  matching to the substitute  $\ddot{Y}_u$  are computed using Equation (6) which is as defined below:

$$TFNNWA_{\ddot{t}}(\ddot{M}_1, \ddot{M}_2, \dots, \ddot{M}_f) = \ddot{t}_1 \ddot{M}_1 \oplus \ddot{t}_2 \ddot{M}_2 \oplus \dots \oplus \ddot{t}_f \ddot{M}_f = \bigoplus_{f=1}^b (\ddot{t}_f \ddot{M}_f), \quad (6)$$

Step 3. By Equations (7) and (8) the score and accuracy values of alternatives  $Y_u (u = i, ii, iii, iv)$  are determined, both of which are defined below:

$$\ddot{H}(\ddot{K}_1) = \frac{1}{4}[(\alpha_1 + 2\beta_1 + \gamma_1) - (\chi_1 + 2\lambda_1 + \delta_1)] \quad (7)$$

$$\ddot{S}(\ddot{K}_1) = \frac{1}{12}[8 + (\alpha_1 + 2\beta_1 + \gamma_1) - (\mu_1 + 2\nu_1 + \rho_1) - (\chi_1 + 2\lambda_1 + \delta_1)] \quad (8)$$

Step 4. In Table 2, according to the descending order of the score and accuracy values the order of the substitutes  $Y_u (u = i, ii, iii, iv)$  is determined and is shown.

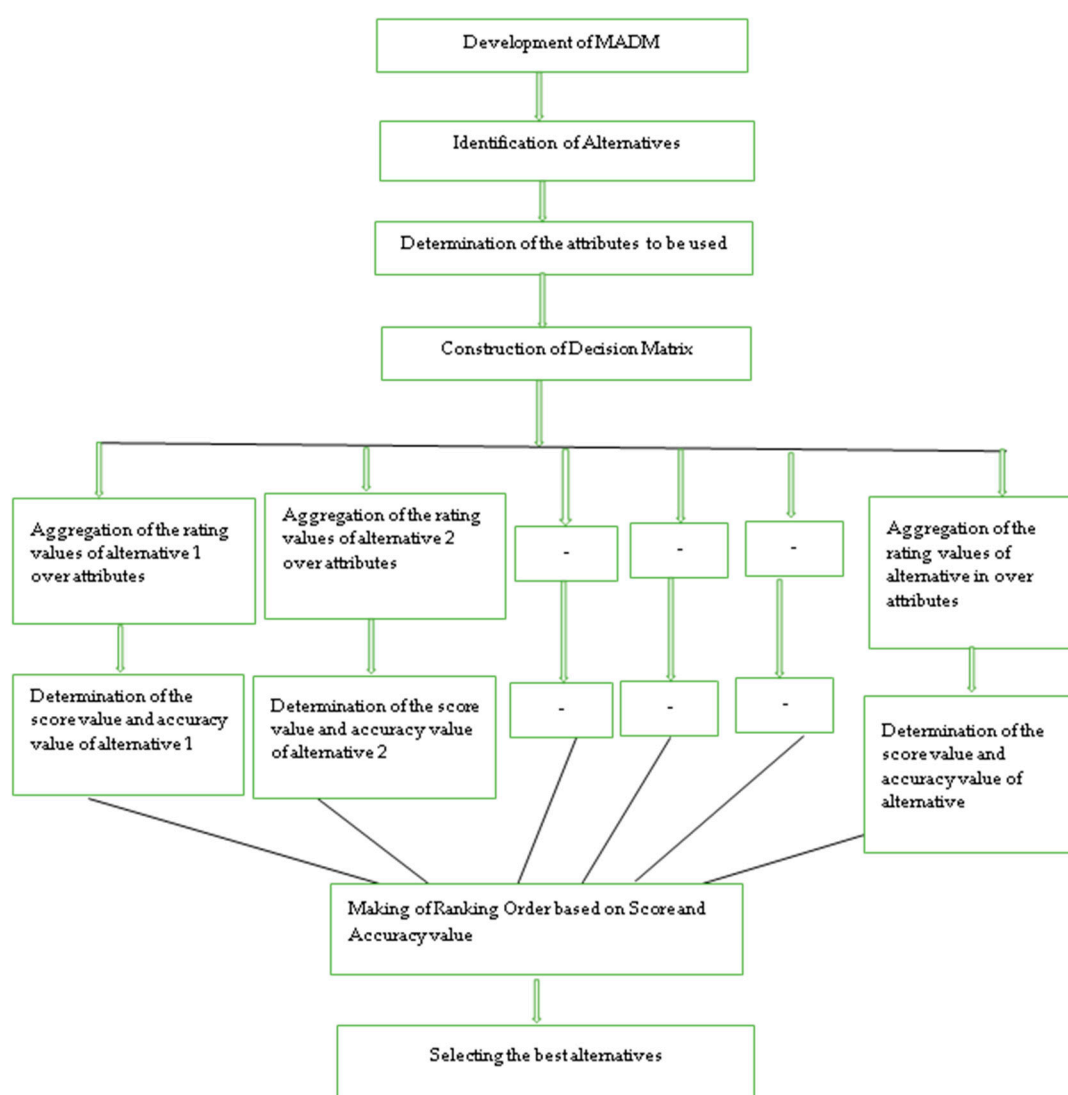


Figure 1. Framework for the proposed multiple attribute decision-making (MADM) method.

Table 2. Aggregated rating values of score and accuracy values.

Alternative	Score Values of $\ddot{S}(\ddot{K}_1)$	Accuracy Values of $\ddot{H}(\ddot{K}_1)$
$Y_i$	0.7960	0.5921
$Y_{ii}$	0.8103	0.6247
$Y_{iii}$	0.6464	0.1864
$Y_{iv}$	0.6951	0.3789

Therefore, following is the ranking order of the alternatives presented:

$$Y_{ii} \succ Y_i \succ Y_{iv} \succ Y_{iii}.$$

Step 5. The highest ranking order is the best medical representative. In this example,  $Y_{ii}$  would be the best candidate for the position of medical representative.

### Utilization of TFNNWG Operator

Step 1. By means of Equation (6)

$$TFNNWG_{\tilde{w}}(\tilde{A}_1, \tilde{A}_2, \dots, \tilde{A}_m) = \tilde{A}_1^{\tilde{w}_1} \otimes \tilde{A}_2^{\tilde{w}_2} \otimes \dots \otimes \tilde{A}_m^{\tilde{w}_m} = \bigotimes_{q=1}^m \left( \tilde{A}_q^{\tilde{w}_q} \right), \quad (9)$$

All the rating values of the alternatives  $Y_u (u = i, ii, iii, iv)$  for the  $u$ -th row of the decision matrix  $\ddot{k} = (\ddot{k}_{uv})_{4 \times 5}$  are aggregated.

Step 2. In the Table 3, corresponding to the alternative  $Y_u$  the aggregated rating values  $u_p$  are shown.

**Table 3.** Rating values of the aggregated triangular fuzzy number neutrosophic set (TFNN).

Aggregated Rating Values		
$u_1$	$\langle (0.6654, 0.7161, 0.7667), (0.1643, 0.2144, 0.2626), (0.1142, 0.1643, 0.2144) \rangle$	
$u_2$	$\langle (0.6998, 0.7502, 0.8002), (0.1485, 0.1986, 0.2486), (0.0984, 0.1485, 0.1986) \rangle$	
$u_3$	$\langle (0.4472, 0.4975, 0.5477), (0.3292, 0.3795, 0.4299), (0.2789, 0.3292, 0.3795) \rangle$	
$u_4$	$\langle (0.5291, 0.5804, 0.6316), (0.2707, 0.3214, 0.3721), (0.2202, 0.2707, 0.3215) \rangle$	

Step 3. We will put the Table 2 values in Equations (5) and (6) and the score and accuracy values of substitutes  $Y_u (u = i, ii, iii, iv)$  are computed. The results obtained in Table 4 are shown below.

**Table 4.** Score and Accuracy values of rating values.

Alternative	Score Value $S(u_p)$	Accuracy Values $\tilde{A}(u_p)$
$Y_i$	0.7791	0.5518
$Y_{ii}$	0.8010	0.6016
$Y_{iii}$	0.5962	0.1683
$Y_{iv}$	0.6627	0.3096

Step 4. According to the descending order of the score and accuracy values the order of alternatives  $Y_u (u = i, ii, iii, iv)$  has been determined. Following is the ranking order of the alternatives presented:

$$Y_{ii} \succ Y_i \succ Y_{iv} \succ Y_{iii}$$

Step 5. The highest ranking order is the best medical representative. In this example,  $Y_{ii}$  would be the best candidate for the position of medical representative.

### 5. Conclusions

In this paper, we gave an overview of a neutrosophic set, its extensions, and other hybrid frameworks of neutrosophic sets, fuzzy based models soft sets, and the application of these neutrosophic models in (MADM) problems. Further, the theoretical properties of the neutrosophic set with its other counterparts have been discussed. Based on the various instances of neutrosophic sets, decision making algorithms have been reviewed, and the utility of these algorithms have been demonstrated using illustrative examples. Aside from the general neutrosophic set, other instances and extensions of neutrosophic sets that were reviewed in this paper include the SVNS, INS, BNS, GINSS, and RNS.

The decision maker provides the information that is often incomplete, inconsistent, and indeterminate in real situations. For actual, logical, and engineering application, a single-valued neutrosophic set (SVNS) is more accurate, because it can handle all of the above information. SVNS was presented by Wang et al. [14], which is an illustration of NS. The classic set, FS, IVFS, IFS and

paraconsistent set are the generalization of the SVN. The INS was presented by H. Wang [15], which is an instance of NS. The classic set, FS, IVFS, IFS, IVFIS, interval type-2 FS and paraconsistent set are the generalized form of INS. Accuracy, score and certainty functions of a BNS was presented by Deli et al. [12] in which  $A_w$  and  $G_w$  operators were suggested to aggregate the bipolar neutrosophic information. Then, according to the values of accuracy, score, and certainty, functions of alternatives are ranked to choose the most desirable one(s).

A soft set was first introduced by Molodtsov [54]. In a decision making problem, they defined some operations on GNSS and presented an application of GNSS. The GNSS was extended by Sahin and Küçük [39] to the situation of IVNSS. In dealing with some decision making problems they also gave some application of GINSS. Some basic properties of a neutrosophic refined set were firstly defined by Broumi et al. [61]. A neutrosophic Refined Set (NRS) with a correlation measure was proposed. In a neutrosophic refined set, Surapati et al. [41] developed a MCGDM model and offered its use in teacher selection. In more basic form the tangent similarity function has been presented. To other GDM problems, the suggested method can also be applied under refined neutrosophic set environment.

For dealing with the vagueness and imperfectness of the DMs assessments, the triangular neutrosophic fuzzy number was used. To solve the MADM problem under a neutrosophic environment, aggregation operators were proposed. Finally, with medical representative selection, the efficiency and applicability of the recommended method has been clarified. In other DM problems, the proposed approach can be also applied to personnel selection, medical diagnosis, and pattern recognition [62–93].

**Author Contributions:** M.K. conceived of the presented idea and verified the analytical methods; L.H.S. started the literature findings, conceived the overview and background study and supervised the findings of this work; M.A. selected literature, discussed the findings and monitored the results; H.T.M.C. contributed in the overview and background study and explained various issues; N.T.N.N. checked and verified the mathematical models, the tables and figure; F.S. supervised the findings of this work and contributed to conclude the paper.

**Funding:** This research is funded by Vietnam National Foundation for Science and Technology Development (NAFOSTED) under grant number 102.05-2018.02.

**Conflicts of Interest:** The authors declare that they do not have any conflict of interests.

## References

1. Smarandache, F. Neutrosophic set—A generalization of the intuitionistic fuzzy set. *Int. J. Pure Appl. Math.* **2004**, *24*, 287.
2. Atanassov, K.T. Intuitionistic fuzzy sets. *Fuzzy Sets Syst.* **1986**, *20*, 87–96. [[CrossRef](#)]
3. Smarandache, F. *Neutrosophy: A Unifying Field in Logics: Neutrosophic Logic. Neutrosophy, Neutrosophic Set, Neutrosophic Probability*; American Research Press: Rehoboth, NM, USA, 2005.
4. Wang, H.; Smarandache, F.; Zhang, Y.; Sunderraman, R. Single valued neutrosophic sets. In Proceedings of the 10th International. Conference on Fuzzy Theory and Technology, Salt Lake City, UT, USA, 21–26 July 2005.
5. Wang, H.; Madiraju, P.; Zhang, Y.; Sunderraman, R. Interval neutrosophic sets. *arXiv* **2004**, arXiv:math/0409113.
6. Maji, P.K. Neutrosophic soft set. *Ann. Fuzzy Math. Inform.* **2013**, *5*, 157–168.
7. Broumi, S.; Smarandache, F. Intuitionistic neutrosophic soft set. *J. Comput. Inf. Sci. Eng.* **2013**, *8*, 130–140.
8. Broumi, S.; Smarandache, F.; Dhar, M. Rough neutrosophic sets. *Neutrosophic Sets Syst.* **2014**, *3*, 62–67.
9. Broumi, S.; Smarandache, F. Interval valued neutrosophic rough set. *J. New Res. Sci.* **2014**, *7*, 58–71.
10. Broumi, S.; Smarandache, F. Interval valued neutrosophic soft rough set. *Int. J. Comput. Math.* **2015**, 2015. [[CrossRef](#)]
11. Ali, M.; Smarandache, F. Complex neutrosophic set. *Neural Comput. Appl.* **2017**, *28*, 1817–1834. [[CrossRef](#)]
12. Deli, I.; Ali, M.; Smarandache, F. Bipolar neutrosophic sets and their application based on multi-criteria decision making problems. In Proceedings of the 2015 International Conference on Advanced Mechatronic Systems (ICAMechS), Beijing, China, 22–24 August 2015; pp. 249–254.
13. Ali, M.; Deli, I.; Smarandache, F. The theory of neutrosophic cubic sets and their applications in pattern recognition. *J. Intell. Fuzzy Syst.* **2016**, *30*, 1957–1963. [[CrossRef](#)]

14. Wang, H.; Smarandache, F.; Zhang, Y.; Sunderraman, R. Single valued neutrosophic sets. *Rev. Air Force Acad.* **2010**, *1*, 10.
15. Wang, H.; Smarandache, F.; Sunderraman, R.; Zhang, Y.Q. *Interval Neutrosophic Sets and Logic: Theory and Applications in Computing*; Hexis: Phoenix, AR, USA, 2005; Volume 5.
16. Biswas, P.; Pramanik, S.; Giri, B.C. TOPSIS method for multi-attribute group decision making under single-valued neutrosophic environment. *Neural Comput. Appl.* **2016**, *27*, 727–737. [[CrossRef](#)]
17. Ye, J. Multi-criteria decision making method using the correlation coefficient under single-valued neutrosophic environment. *Int. J. Gen. Syst.* **2013**, *42*, 386–394. [[CrossRef](#)]
18. Deli, I.; Subas, Y. Single valued neutrosophic numbers and their applications to multicriteria decision making problem. *Neutrosophic Sets Syst.* **2014**, *2*, 1–13.
19. Huang, H. New distance measure of single-valued neutrosophic sets and its application. *Int. J. Intell. Syst.* **2016**, *31*, 1021–1032. [[CrossRef](#)]
20. Yang, L.; Li, B. A Multi-Criteria Decision-Making Method Using Power Aggregation Operators for Single-valued Neutrosophic Sets. *Int. J. Database Theory Appl.* **2016**, *9*, 23–32. [[CrossRef](#)]
21. Ye, J. Single valued neutrosophic cross-entropy for multi-criteria decision making problems. *Appl. Math. Model.* **2014**, *38*, 1170–1175. [[CrossRef](#)]
22. Deli, I.; Şubaş, Y. A ranking method of single valued neutrosophic numbers and its applications to multi-attribute decision making problems. *Int. J. Mach. Learn. Cybern.* **2017**, *8*, 1309–1322. [[CrossRef](#)]
23. Ye, J. Improved correlation coefficients of single valued neutrosophic sets and interval neutrosophic sets for multiple attribute decision making. *J. Intell. Fuzzy Syst.* **2014**, *27*, 2453–2462.
24. Ye, J.; Zhang, Q. Single valued neutrosophic similarity measures for multiple attribute decision making. *Neutrosophic Sets Syst.* **2014**, *2*, 48–54.
25. Ye, J. An extended TOPSIS method for multiple attribute group decision making based on single valued neutrosophic linguistic numbers. *J. Intell. Fuzzy Syst.* **2015**, *28*, 247–255.
26. Ye, J. Improved cross entropy measures of single valued neutrosophic sets and interval neutrosophic sets and their multicriteria decision making methods. *Cybern. Inf. Technol.* **2015**, *15*, 13–26. [[CrossRef](#)]
27. Ye, J.; Fu, J. Multi-period medical diagnosis method using a single valued neutrosophic similarity measure based on tangent function. *Comput. Methods Programs Biomed.* **2016**, *123*, 142–149. [[CrossRef](#)] [[PubMed](#)]
28. Sahin, R.; Karabacak, M. A multi attribute decision making method based on inclusion measure for interval neutrosophic sets. *Int. J. Eng. Appl. Sci.* **2015**, *2*, 13–15.
29. Chi, P.; Liu, P. An extended TOPSIS method for the multiple attribute decision making problems based on interval neutrosophic set. *Neutrosophic Sets Syst.* **2013**, *1*, 63–70.
30. Huang, Y.; Wei, G.; Wei, C. VIKOR method for interval neutrosophic multiple attribute group decision-making. *Information* **2017**, *8*, 144. [[CrossRef](#)]
31. Liu, P.; Wang, Y. Interval neutrosophic prioritized OWA operator and its application to multiple attribute decision making. *J. Syst. Sci. Complex.* **2016**, *29*, 681–697. [[CrossRef](#)]
32. Tian, Z.P.; Zhang, H.Y.; Wang, J.; Wang, J.Q.; Chen, X.H. Multi-criteria decision-making method based on a cross-entropy with interval neutrosophic sets. *Int. J. Syst. Sci.* **2016**, *47*, 3598–3608. [[CrossRef](#)]
33. Ye, J. Similarity measures between interval neutrosophic sets and their applications in multi-criteria decision making. *J. Intell. Fuzzy Syst.* **2014**, *26*, 165–172.
34. Zhang, H.Y.; Wang, J.Q.; Chen, X.H. Interval neutrosophic sets and their application in multi-criteria decision making problems. *Sci. World J.* **2014**, *2014*, 1–15.
35. Zhang, H.Y.; Ji, P.; Wang, J.Q.; Chen, X.H. An improved weighted correlation coefficient based on integrated weight for interval neutrosophic sets and its application in multi-criteria decision-making problems. *Int. J. Comput. Intell. Syst.* **2015**, *8*, 1027–1043. [[CrossRef](#)]
36. Dey, P.P.; Pramanik, S.; Giri, B.C. TOPSIS for Solving Multi-Attribute Decision Making Problems under Bi-Polar Neutrosophic Environment. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016; p. 65.
37. Ali, M.; Son, L.H.; Deli, I.; Tien, N.D. Bipolar neutrosophic soft sets and applications in decision making. *J. Intell. Fuzzy Syst.* **2017**, *33*, 4077–4087. [[CrossRef](#)]
38. Uluçay, V.; Deli, I.; Şahin, M. Similarity measures of bipolar neutrosophic sets and their application to multiple criteria decision making. *Neural Comput. Appl.* **2018**, *29*, 739–748. [[CrossRef](#)]

39. Sahin, R.; Küçük, A. Generalised Neutrosophic Soft Set and its Integration to Decision Making Problem. *Appl. Math. Inf. Sci.* **2014**, *8*, 2751–2759. [[CrossRef](#)]
40. Broumi, S.; Sahin, R.; Smarandache, F. Generalized interval neutrosophic soft set and its decision making problem. *J. New Res. Sci.* **2014**, *3*, 29–47.
41. Mondal, K.; Pramanik, S. Neutrosophic refined similarity measure based on cotangent function and its application to multi-attribute decision making. *J. New Theory* **2015**, *8*, 41–50.
42. Samuel, A.E.; Narmadhagnanam, R. Neutrosophic refined sets in medical diagnosis. *Int. J. Fuzzy Math. Arch.* **2017**, *14*, 117–123.
43. Pramanik, S.; Banerjee, D.; Giri, B. TOPSIS Approach for Multi Attribute Group Decision Making in Refined Neutrosophic Environment. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016.
44. Chen, J.; Ye, J.; Du, S. Vector similarity measures between refined simplified neutrosophic sets and their multiple attribute decision-making method. *Symmetry* **2017**, *9*, 153. [[CrossRef](#)]
45. Biswas, P.; Pramanik, S.; Giri, B.C. Aggregation of triangular fuzzy neutrosophic set information and its application to multi-attribute decision making. *Neutrosophic Sets Syst.* **2016**, *12*, 20–40.
46. Zhang, X.; Liu, P. Method for aggregating triangular fuzzy intuitionistic fuzzy information and its application to decision making. *Technol. Econ. Dev. Econ.* **2010**, *16*, 280–290. [[CrossRef](#)]
47. Biswas, P.; Pramanik, S.; Giri, B.C. Cosine similarity measure based multi-attribute decision-making with trapezoidal fuzzy neutrosophic numbers. *Neutrosophic Sets Syst.* **2014**, *8*, 46–56.
48. Ye, J. Trapezoidal neutrosophic set and its application to multiple attribute decision making. *Neural Comput. Appl.* **2015**, *26*, 1157–1166. [[CrossRef](#)]
49. Mondal, K.; Surapati, P.; Giri, B.C. Role of Neutrosophic Logic in Data Mining. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016; pp. 15–23.
50. Radwan, N.M. Neutrosophic Applications in E-learning: Outcomes, Challenges and Trends. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016; pp. 177–184.
51. Koundal, D.; Gupta, S.; Singh, S. Applications of Neutrosophic Sets in Medical Image Diagnosing and segmentation. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016; pp. 257–275.
52. Patro, S.K. On a Model of Love dynamics: A Neutrosophic analysis. In *New Trends in Neutrosophic Theory and Applications*; Smarandache, F., Pramanik, S., Eds.; Pons asbl: Brussels, Belgium, 2016; pp. 279–287.
53. Zadeh, L.A. Fuzzy Sets. *Inf. Control* **1965**, *8*, 338–353. [[CrossRef](#)]
54. Molodtsov, D. Soft set theory—First result. *Comput. Math. Appl.* **1999**, *37*, 19–31. [[CrossRef](#)]
55. Karaaslan, F. Correlation coefficients of single-valued neutrosophic refined soft sets and their applications in clustering analysis. *Neural Comput. Appl.* **2017**, *28*, 2781–2793.
56. Broumi, S.; Smarandache, F. Extended Hausdorff distance and similarity measures for neutrosophic refined sets and their application in medical diagnosis. *J. New Theory* **2015**, *7*, 64–78.
57. Boran, F.E.; Genç, S.; Kurt, M.; Akay, D. A multi-criteria intuitionistic fuzzy group decision making for supplier selection with TOPSIS method. *Expert Syst. Appl.* **2009**, *36*, 11363–11368. [[CrossRef](#)]
58. Dezert, J. Open Questions on Neutrosophic Inference. *Mult.-Valued Log.* **2002**, *8*, 439–472.
59. Wang, Y.M. Using the method of maximizing deviations to make decision for multi-indices. *Syst. Eng. Electron.* **1998**, *7*, 31.
60. Nădăban, S.; Dzitac, S. Neutrosophic TOPSIS: A general view. In Proceedings of the 2016 6th International Conference on Computers Communications and Control (ICCCC), Oradea, Romania, 10–14 May 2016; pp. 250–253.
61. Broumi, S.; Smarandache, F. Neutrosophic refined similarity measure based on cosine function. *Neutrosophic Sets Syst.* **2014**, *6*, 42–48.
62. Broumi, S.; Smarandache, F. Correlation coefficient of interval neutrosophic set. In *Applied Mechanics and Materials*; Trans Tech Publications, Inc.: Zürich, Switzerland, 2013; pp. 511–517.
63. Broumi, S.; Smarandache, F. More on intuitionistic neutrosophic soft sets. *Comput. Sci. Inf. Technol.* **2013**, *1*, 257–268.
64. Ali, M.; Son, L.H.; Thanh, N.D.; Nguyen, V.M. A neutrosophic recommender system for medical diagnosis based on algebraic neutrosophic measures. *Appl. Soft Comput.* **2018**. [[CrossRef](#)]

65. Al-Quran, A.; Hassan, N. Fuzzy parameterized single valued neutrosophic soft expert set theory and its application in decision making. *Int. J. Appl. Decis. Sci.* **2016**, *9*, 212–227.
66. Ansari, A.Q.; Biswas, R.; Aggarwal, S. Proposal for applicability of neutrosophic set theory in medical AI. *Int. J. Comput. Appl.* **2011**, *27*, 5–11. [\[CrossRef\]](#)
67. Bhowmik, M.; Pal, M. Intuitionistic neutrosophic set relations and some of its properties. *J. Comput. Inform. Sci.* **2010**, *5*, 183–192.
68. Biswas, R.; Pandey, U.S. Neutrosophic Relational Database Decomposition. *Int. J. Adv. Comput. Sci. Appl.* **2011**, *2*, 121–125.
69. Broumi, S.; Smarandache, F. Cosine similarity measure of interval valued neutrosophic sets. *Neutrosophic Sets Syst.* **2014**, *5*, 15–20.
70. Broumi, S.; Smarandache, F. Several similarity measures of neutrosophic sets. *Neutrosophic Sets Syst.* **2013**, *1*, 54–62.
71. Broumi, S.; Deli, I.; Smarandache, F. Neutrosophic parameterized soft set theory and its decision making. *Ital. J. Pure Appl. Math.* **2014**, *32*, 503–514.
72. Deli, I.; Broumi, S.; Smarandache, F. On neutrosophic refined sets and their applications in medical diagnosis. *J. New Theory* **2015**, *6*, 88–98.
73. Karaaslan, F. Possibility neutrosophic soft sets and PNS-decision making method. *Appl. Soft Comput.* **2017**, *54*, 403–414. [\[CrossRef\]](#)
74. Maji, P.K. A neutrosophic soft set approach to a decision making problem. *Ann. Fuzzy Math Inform.* **2012**, *3*, 313–319.
75. Pawlak, Z.; Grzymala-Busse, J.; Slowinski, R.; Ziarko, W. Rough sets. *Commun. ACM* **1995**, *38*, 88–95. [\[CrossRef\]](#)
76. Peng, X.; Liu, C. Algorithms for neutrosophic soft decision making based on EDAS, new similarity measure and level soft set. *J. Intell. Fuzzy Syst.* **2017**, *32*, 955–968. [\[CrossRef\]](#)
77. Peng, J.J.; Wang, J.; Wang, J.; Zhang, H.; Chen, X. Simplified neutrosophic sets and their applications in multi-criteria group decision-making problem. *Int. J. Syst. Sci.* **2016**, *47*, 2342–2358. [\[CrossRef\]](#)
78. Sahin, R.; Liu, P. Maximizing deviation method for neutrosophic multiple attribute decision making with incomplete weight information. *Neural Comput. Appl.* **2015**, *27*, 2017–2029. [\[CrossRef\]](#)
79. Schweizer, B.; Sklar, A. Statistical metric spaces. *Pac. J. Math.* **1960**, *10*, 313–334. [\[CrossRef\]](#)
80. Thanh, N.D.; Ali, M.; Son, L.H. A novel clustering algorithm in a neutrosophic recommender system for medical diagnosis. *Cogn. Comput.* **2017**, *9*, 526–544. [\[CrossRef\]](#)
81. Ye, J. A multi-criteria decision making method using aggregation operators for simplified neutrosophic sets. *J. Intell. Fuzzy Syst.* **2014**, *26*, 2459–2466.
82. Ye, J. Fault diagnoses of hydraulic turbine using the dimension root similarity measure of single-valued neutrosophic sets. *Intell. Autom. Soft Comput.* **2016**, 1–8. [\[CrossRef\]](#)
83. Ye, J. Single-valued neutrosophic similarity measures based on cotangent function and their application in the fault diagnosis of steam turbine. *Soft Comput.* **2017**, *21*, 817–825. [\[CrossRef\]](#)
84. Ye, J.; Du, S. Some distances, similarity and entropy measures for interval valued neutrosophic sets and their relationship. *Int. J. Mach. Learn. Cybern.* **2017**, 1–9. [\[CrossRef\]](#)
85. Zhang, C.; Zhai, Y.; Li, D.; Mu, Y. Steam turbine fault diagnosis based on single-valued neutrosophic multigranulation rough sets over two universes. *J. Intell. Fuzzy Syst.* **2016**, *31*, 2829–2837. [\[CrossRef\]](#)
86. Zhang, C.; Li, D.; Sangaiah, A.K.; Broumi, S. Merger and acquisition target selection based on interval neutrosophic multi-granulation rough sets over two universes. *Symmetry* **2017**, *9*, 126. [\[CrossRef\]](#)
87. Jha, S.; Kumar, R.; Son, L.; Chatterjee, J.M.; Khari, M.; Yadav, N.; Smarandache, F. Neutrosophic soft set decision making for stock trending analysis. *Evolv. Syst.* **2018**. [\[CrossRef\]](#)
88. Dey, A.; Broumi, S.; Son, L.H.; Bakali, A.; Talea, M.; Smarandache, F. A new algorithm for finding minimum spanning trees with undirected neutrosophic graphs. *Granul Comput.* **2018**, 1–7. [\[CrossRef\]](#)
89. Ali, M.; Son, L.H.; Khan, M.; Tung, N.T. Segmentation of dental X-ray images in medical imaging using neutrosophic orthogonal matrices. *Expert Syst. Appl.* **2018**, *91*, 434–441. [\[CrossRef\]](#)
90. Ali, M.; Dat, L.Q.; Son, L.H.; Smarandache, F. Interval complex neutrosophic set: Formulation and applications in decision-making. *Int. J. Fuzzy Syst.* **2018**, *20*, 986–999. [\[CrossRef\]](#)
91. Nguyen, G.N.; Son, L.H.; Ashour, A.S.; Dey, N. A survey of the state-of-the-arts on neutrosophic sets in biomedical diagnoses. *Int. J. Mach. Learn. Cybern.* **2017**, 1–13. [\[CrossRef\]](#)

92. Thanh, N.D.; Son, L.H.; Ali, M. Neutrosophic recommender system for medical diagnosis based on algebraic similarity measure and clustering. In Proceedings of the 2017 IEEE International Conference on Fuzzy System (FUZZ-IEEE), Naples, Italy, 9–12 July 2017; pp. 1–6.
93. Broumi, S.; Bakali, A.; Talea, M.; Smarandache, F.; Selvachandran, G. Computing Operational Matrices in Neutrosophic Environments: A Matlab Toolbox. *Neutrosophic Sets Syst.* **2017**, *18*, 58–66.



© 2018 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).