electronics

MDPI

Article

Customized Weighted Ensemble of Modified Transfer Learning Models for the Detection of Sugarcane Leaf Diseases

Kaiwen Hu, Honghui Li *, Xueliang Fu and Shuncheng Zhou

College of Computer and Information Engineering, Inner Mongolia Agricultural University, Hohhot 010018, China; hkwailele@emails.imau.edu.cn (K.H.); fuxl_imau@163.com (X.F.); zhousc1121@163.com (S.Z.)

* Correspondence: lihh@imau.edu.cn

Abstract: Sugarcane is the primary crop in the global sugar industry, yet it remains highly susceptible to a wide range of diseases that significantly impact its yield and quality. An effective solution is required to address the issues caused by the manual identification of plant diseases, which is time-consuming and has low detection accuracy. This paper proposes the development of a robust Deep Ensemble Convolutional Neural Network (DECNN) model for the accurate detection of sugarcane leaf diseases. Initially, several transfer learning (TL) models, including EfficientNetB0, MobileNetV2, DenseNet121, NASNetMobile, and EfficientNetV2B0, were enhanced through the addition of specific layers. A comparative analysis was then conducted on the enlarged dataset of sugarcane leaf diseases, which was divided into six categories and 4800 images. The application of data augmentation, along with the addition of dense layers, batch normalization layers, and dropout layers, led to improved detection accuracy, precision, recall, and F1 scores for each model. Among the five enhanced transfer learning models, the modified EfficientNetB0 model demonstrated the highest detection accuracy, ranging from 97.08% to 98.54%. In conclusion, the DECNN model was developed by integrating the modified EfficientNetB0, MobileNetV2, and DenseNet121 models using a distinctive performance-based custom-weighted ensemble method, with weight optimization carried out using the Tree-structured Parzen Estimator (TPE) technique. This resulted in a model that achieved a detection accuracy of 99.17%, which outperformed the individual performance of the modified EfficientNetB0, MobileNetV2, and DenseNet121 models in detecting sugarcane leaf diseases.

Keywords: CNN; transfer learning; deep learning; ensemble learning; sugarcane leaf diseases

check for updates

Citation: Hu, K.; Li, H.; Fu, X.; Zhou, S. Customized Weighted Ensemble of Modified Transfer Learning Models for the Detection of Sugarcane Leaf Diseases. *Electronics* **2024**, *13*, 4715. https://doi.org/10.3390/electronics13234715

Academic Editor: José Carlos Castillo

Received: 12 October 2024
Revised: 24 November 2024
Accepted: 27 November 2024
Published: 28 November 2024

Copyright: © 2024 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

1. Introduction

Sugarcane (*Saccharum* spp.) is a perennial graminaceous plant belonging to the C4 class, known for its ability to accumulate substantial quantities of sucrose in specialized parenchyma storage cells [1]. As one of the most economically significant crops worldwide, sugarcane contributes approximately 80% of global sugar production, with an estimated annual market value of around USD 150 billion [2]. Besides sucrose, other by-products of sugarcane are bagasse, molasses, fiberboard, and different components that are utilized in the manufacturing of butanol, ethanol, and citric acid [3]. China, Thailand, Brazil, and India are the top producers of sugarcane [4]. When the average incidence of sugarcane disease reaches 50%, sugarcane stem yield declines by around 25%. If not detected and treated early, sugarcane diseases can lead to severe economic losses, particularly for smallholder farmers [5].

These diseases often become discernible to the eye only after the plant has already sustained significant damage. Therefore, it is crucial to develop technological solutions that enable early detection, assisting both farmers and agricultural experts in mitigating the impact of these diseases. In response to this challenge, several innovative technological approaches have been introduced. Traditional methods for plant disease detection involve

the use of chemical agents and plant maceration, but these processes require expert evaluation in specialized laboratories, making them time-consuming and resource-intensive. Non-invasive methods for tracking and identifying plant diseases have been developed in order to circumvent these restrictions, including computer-aided detection, remote sensing, spectral imaging, and image processing [6,7]. A variety of techniques have been used, including digital cameras, satellites, and unmanned aerial vehicles (UAVs), to obtain images of plant leaf diseases. However, satellite data often lack the resolution and detail necessary for analyzing individual plants, and the cost of acquiring satellite data is substantial. UAVs, while offering more flexibility, are limited by weather conditions, flight direction constraints, and the risk of crashes, which can degrade image quality. This field has made good use of image processing techniques, which include image acquisition, preprocessing, segmentation, feature extraction, and classification. Nevertheless, the experimental setups required for optical sensors and spectral imaging are costly, posing challenges for farmers [8,9].

As computational power continues to increase, advanced deep learning (DL) techniques are increasingly employed to enhance the performance of predictive models. Nevertheless, a significant amount of data is needed to train convolutional neural networks (CNNs), and this type of data is frequently lacking in agricultural research, especially when it comes to the investigation of illnesses that affect sugarcane leaves. A potential solution to this data scarcity is the combination of transfer learning (TL) and data augmentation. Data augmentation techniques help mitigate overfitting during the training phase of deep neural networks [10]. As noted in [11], the main benefits of transfer learning include decreased training times, enhanced neural network functionality, and reduced data consumption. Numerous studies have explored the use of CNNs, CNN-based deep learning techniques, and TL methods. However, the application of ensembles of modified TL models in this field remains relatively unexplored. Ensembles of such models have the potential to significantly improve the performance of crop disease identification systems. This serves as the motivation for this paper, which applies a weighted ensemble technique to various modified transfer learning models.

The main contributions of this paper are as follows:

- This study aims to enhance transfer learning (TL) models to improve the detection of sugarcane leaf diseases. To achieve this, the TL models are augmented with dense layers for regularization, batch normalization layers, and dropout layers to prevent overfitting.
- The application of five enhanced transfer learning models results in a notable improvement in test accuracy, as evidenced by the utilization of a public dataset of sugarcane leaf diseases for comparative evaluation.
- A novel Deep Ensemble Convolutional Neural Network (DECNN) model for the detection of sugarcane leaf diseases is proposed, utilizing a distinctive performance-based custom-weighted ensemble method. The model achieves an accuracy of 99.17%, outperforming individual models in detection accuracy.

The rest of this paper is structured as follows. Section 2 gives a summary of the relevant literature. The proposed methodology and dataset are described in Section 3. The results of our comparative evaluation are presented in Section 4. Section 5 provides a discussion of our findings. The conclusions and directions for future research are presented in Section 6.

2. Related Works

In agricultural research, artificial intelligence (AI) is a fast-developing field within the larger framework of the Fourth Industrial Revolution. It is frequently used in many different applications, such as yield prediction, pest detection, and disease categorization. In previous years, image classification was primarily conducted using traditional machine learning methods. In machine learning, the Support Vector Machine (SVM) is a traditional binary classification model. An SVM classifier was proposed by Yigit et al. [12] for the binary classification of healthy and damaged sugarcane leaves on a plain background.

Through examination of the images' color and texture characteristics, the researchers were able to obtain 92.91% accuracy. Additionally, algorithms such as Random Forest (RF) [13], the Backpropagation Neural Network (BPNN) [14], and K-Nearest Neighbors (KNN) [15] have been extensively utilized for leaf disease classification in various crops.

The application of machine learning in image classification is becoming less prevalent with the rise of artificial neural networks (ANNs) and convolutional neural networks (CNNs), as deep learning has become the dominant approach in this area. With an astounding accuracy of 95.48%, Wu et al. [16] developed a fine-grained disease classification approach based on a CNN to predict and categorize over 20,000 peach and tomato leaf illnesses from the Plant Village website. Similarly, Patil et al. [17] introduced "Rice Fusion", a novel multimodal data fusion framework combining a CNN and a multilayer perceptron (MLP) to diagnose rice diseases. The model was trained and tested on 3200 manually collected rice samples from four categories, ultimately demonstrating robust performance with a test accuracy of 95.31%. One enduring obstacle in agricultural research is the dearth of extensive databases. This problem has a potential remedy in transfer learning. Elfatimi et al. [18] identified the optimal configuration of MobileNetV2 for bean leaf disease classification using parameter tuning and transfer learning techniques. The model was trained on a public dataset of 1,296 bean leaf images across three categories, achieving an average classification accuracy exceeding 92%. In another study by Rahaman Yead et al. [19], five well-known deep learning architectures, including ResNet-50, VGG-16, DenseNet-201, VGG-19, and Inception V3, were utilized to build a dataset of 2511 images across five sugarcane leaf disease categories. After applying transfer learning and parameter tuning, the ResNet-50 model demonstrated the highest accuracy of 95.69%. In Ref. [20], the authors compared state-of-the-art deep learning benchmark models to create a new hybrid model combining EfficientNetB0, a custom-designed neural network, and CSP-Darknet53. This hybrid model was tailored to capture the distinctive characteristics of sugarcane diseases, achieving an accuracy of 96.80% on a dataset containing 2522 sugarcane leaf disease images across five categories from Mendeley. Sidana et al. [21] enhanced two well-known pre-trained models, DenseNet121 and InceptionV3, by adding extra layers at the end and achieved respectable accuracies of 96% and 97%, respectively, on a dataset containing 2569 images of sugarcane leaf diseases across five categories. The integration of ANNs and feature selection has been a focus for many researchers. Pham et al. [22] developed an ANN-based hybrid meta-heuristic approach for feature selection to detect early-stage diseases in mango leaves. The ANN was trained on a manually collected dataset containing 450 mango leaf images across four categories (three diseased and one healthy), achieving superior results (89.41%) compared to prevalent CNN models such as AlexNet, VGG16, and ResNet-50 (78.64%, 79.92%, and 84.88%, respectively). Another method for improving deep learning precision is the incorporation of attention mechanisms. A hybrid SE-ViT model was proposed by Sun et al. [23], which achieved a 97.26% accuracy rate on the PlantVillage dataset for the diagnosis of sugarcane leaf diseases. On a private dataset named SLD, comprising five categories (healthy, red-stripe, ring-spot, brown-stripe, and bacterial diseases), SE-ViT outperformed four classical neural network models, with an accuracy of 89.57%. Ensemble learning is a widely used approach for enhancing model accuracy. A real-time dataset containing five sugarcane leaf types—red rot, foliar, yellow leaf, healthy, and rust—was created by Daphal et al. [24]. They conducted a comparative study using transfer learning and ensemble methods to classify the dataset for sugarcane leaf diseases. An accuracy of 86.53% was attained by the ensemble model, which was composed of a sequential CNN and a deep CNN with spatial attention. Table 1 offers a thorough summary of the most recent state-of-the-art research findings in the field of plant leaf disease identification, emphasizing different architectural strategies in particular.

Table 1. Comparison of various architectural approaches proposed for different plants.

Reference	Model(s) Used	Dataset	Number of Images	Number of Classes	Transfer Learning	Ensemble Learning	Data Augmentation	Accuracy
[12]	SVM	Multi-plant (Folio)	637	32	No	No	No	92.91%
[16]	CNN(FGIA)	Peach, Tomato (PlantVillage)	2657, 18,162	2, 10	No	No	No	95.48%
[17]	CNN, MLP	Rice (own)	3200	4	No	Yes	No	95.31%
[18]	MobileNetV2	Bean (ibean)	1296	3	Yes	No	No	92.97%
[19]	ResNet50, VGG16,VGG19 DenseNet201, InceptionV3	Sugarcane (Mendeley)	2511	5	Yes	No	No	95.69%
[20]	EfficientNetB0, CSPDarknet53	Sugarcane (Mendeley)	2522	5	Yes	Yes	Yes	96.80%
[21]	DenseNet121, InceptionV3	Sugarcane (Kaggle)	2569	5	Yes	No	No	96.00%, 97.00%
[22]	ANN	Mango (own)	450	4	No	No	No	89.41%
[23]	SE-VIT	Multi-plant (PlantVillage), Sugarcane (own)	60,343, 1877	38, 5	Yes	No	Yes	89.57%
[24]	CNN,VGG19, ResNet50, Xception, MobileNetV2, EfficientNetB7	Sugarcane (own)	2569	5	Yes	Yes	No	86.53%

A review of the literature reveals five key machine learning approaches that have been employed for the classification of sugarcane leaf diseases. Initially, traditional machine learning methods were used, but their performance limitations led to the rise in popularity of convolutional neural network (CNN) models. Subsequently, hybrid models combining CNNs and multilayer perceptrons (MLPs) were developed. The third phase involved the implementation of CNN models that incorporated transfer learning. Finally, Daphal et al. [24] successfully classified sugarcane leaf disease using an average ensemble of transfer learning models in a recent study; however, the accuracy was only 86.53%.

3. Materials and Methods

In this paper, we propose a Deep Ensemble Convolutional Neural Network (DECNN) model consisting of three modified transfer learning (TL) models for the high-precision classification of sugarcane leaf diseases. The tests were carried out with an openly accessible dataset. The experimental setup and technique are explained in detail in the next section.

3.1. Dataset

The validity of the results from data science research is strongly reliant on the availability of correct and trustworthy data. The more precise and relevant the data in a model's dataset, the more accurate and useful the model becomes. In this study, a dataset related to sugarcane leaf diseases was obtained from Kaggle [25,26]. The dataset comprises six categories (illustrated in Figure 1), including healthy, mosaic, red rot, rust, yellow leaf, and bacterial blight, with a total of 2646 images across these categories. To ensure the dataset was both representative and diverse, the images were captured using various smartphones. The number of images per category varied significantly, as did their size and dimensions.



Figure 1. Some examples of sugarcane diseases.

3.2. Data Augmentation and Preprocessing

An existing dataset can be enhanced with new data points using a variety of methods known as data augmentation, which essentially artificially increases the amount of available

data. Conventional data augmentation methods help mitigate the issue of overfitting, facilitating smoother classifier training [27]. In the present study, the sugarcane leaf disease dataset was augmented exclusively through the use of the ImageDataGenerator module, a component of the Python software 3.10.12 version [28]. In order to achieve a more balanced dataset, a series of augmentation techniques were applied to images from each class in the dataset. These techniques included rotation, shift, shear, zoom, horizontal flip, and brightness effects. Table 2 shows the amplification parameters. As shown in Table 3, the augmented dataset comprised 4800 images, with approximately 800 images per category. Accurate data preprocessing forms the basis of precise data analysis [29]. Using the image processing capabilities of the OpenCV and Pandas libraries, all of the images in the expanded sugarcane leaf disease dataset were shrunk to 224 × 224 pixels in order to decrease computing costs and fulfill the input criteria of the network model utilized in this study. After that, the dataset was divided into training, validation, and testing sets in an 80-10-10 ratio.

Table 2. Specifications of the augmentation methods used in this study.

Serial No.	Augmentation Technique	Parameter with Value
1	Rotation	rotation_range = 20
2	Width shift	width_shift_range = 0.2
3	Height shift	height_shift_range = 0.2
4	Shear	shear_range = 0.2
5	Zoom	zoom_range = 0.2
6	Horizontal flip	horizontal_flip = True
7	Brightness	brightness_range = [0.5, 1.5]

Table 3. Sample size before and after augmentation of the sugarcane leaf disease dataset.

Classes	Original Dataset				Data Augmentation			
	Total	Training	Validation	Testing	Total	Training	Validation	Testing
Healthy	522	420	54	48	800	631	75	94
Mosaic	462	366	49	47	800	658	68	74
RedRot	518	413	49	56	800	653	77	70
Rust	514	416	45	53	800	644	83	73
Yellow	505	400	56	49	800	618	96	86
BacterialBlight	125	101	12	12	800	636	81	83
Total	2646	2116	265	265	4800	3840	480	480

3.3. Proposed DECNN Model

Figure 2 illustrates the customized weighted ensemble of the modified transfer learning (TL) model proposed in this study for the detection of sugarcane leaf diseases. Initially, the dataset of sugarcane leaf diseases was obtained from Kaggle, as described earlier. The OpenCV and Pandas libraries were utilized to perform a comprehensive statistical analysis of the dataset. After that, the dataset was increased, as explained in Section 3.2, and every image was adjusted to have a uniform size of 224 by 224 pixels. After that, the dataset was split into three subsets: training, validation, and testing sets. Subsequently, five TL models were enhanced by incorporating dense layers with ELN-Reg regularization, batch normalization layers, and dropout layers, respectively. These models were trained using the RMSprop optimizer and the categorical cross-entropy loss function. Finally, the three most effective modified TL models were combined using a uniquely customized weighted ensemble method to form the DECNN model.

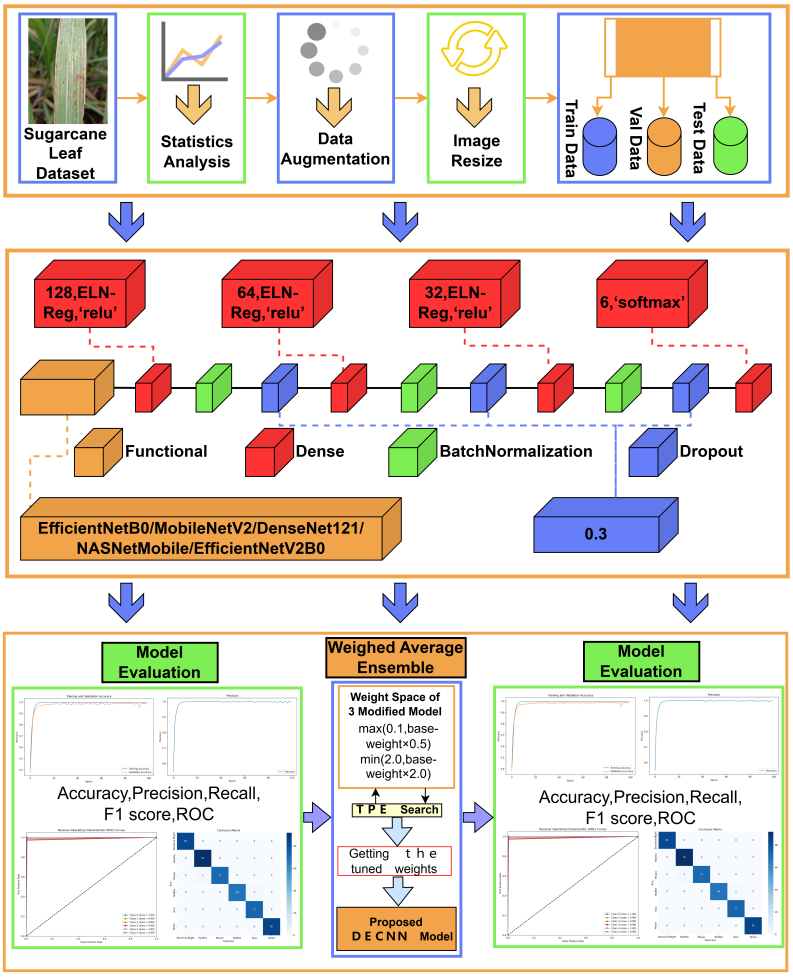


Figure 2. Flow diagram of the proposed DECNN model.

3.3.1. ELN-Reg Regularization

ELN-Reg regularization is a novel technique introduced in this paper that integrates the principles of Elastic Net [30] and DL-Reg regularization [31]. The primary objective of this approach is to enhance the model's generalization capabilities, particularly in high-dimensional datasets. This method incorporates L1 and L2 penalty terms into the loss function, effectively balancing the advantages of feature selection with model stability. Furthermore, by defining the linear mapping error from the input to the output as a linear constraint, ELN-Reg improves the model's linearity to a certain extent. This technique not only facilitates feature selection but also mitigates overfitting, thereby enhancing the predictive performance of the model in complex, high-dimensional environments. ELN-Reg regularization can be expressed mathematically as shown in Equation (1):

$$R(x) = \alpha\left(\rho \cdot \|x\|_1 + \frac{1-\rho}{2} \cdot \|x\|_2^2\right) + \gamma \cdot \mathrm{MSE}(x, \hat{x}) \tag{1}$$

In this context, $R(x)$ represents the total regularization term applied to the parameter x. The value of α determines the strength of the L1 and L2 regularization terms. The term ρ represents the relative weight of the L1 regularization term and the L2 regularization term. The variable $\|x\|_1$ can be understood as the L1 paradigm, which is defined as the sum of the absolute values of the elements of x. Similarly, the variable $\|x\|_2^2$ represents the square of the L2 paradigm, which is the sum of the squares of the elements of x. The parameter γ controls the strength of the DL-Reg regularization term. $\mathrm{MSE}(x, \hat{x})$ is the mean square error between the input x and its estimate $\hat{x}$.

The regularization coefficients α, ρ, and γ are pivotal parameters in ELN-Reg, influencing the efficacy of the network. An increase in the regularization coefficients α, ρ, and γ results in a reduction in the learning capacity of the network. Conversely, as the regularization/generalization coefficients approach zero, the impact of these processes on the learning process is reduced [31]. It is therefore essential to select appropriate values for α, ρ, and γ in order to achieve optimal performance. This allows the model to benefit from the feature selection power of L1 regularization, the ability of L2 regularization to enhance model stability, and the capacity of DL-Reg regularization to enforce linearity to enhance generalization. In this paper, we employ the hyperparameter tuning tool Optuna [32] to efficiently search for optimal parameter values within a given search space. This paper presents a comparative analysis of ELN-Reg regularization with other common regularization methods and without regularization on a data-augmented sugarcane leaf disease dataset using EfficientNetB0 as the base model. Table 4 illustrates the outcomes, demonstrating that ELN-Reg exhibits superior performance on the sugarcane leaf disease dataset. Furthermore, the combination of ELN-Reg and dropout attains a final test accuracy of 98.54%. Accordingly, the combination of ELN-Reg and dropout was selected as the regularization method for the present experiment.

Table 4. Comparison of common regularization methods with and without regularization in sugarcane leaf disease classification accuracy using EfficientNetB0 as the base model.

Method	Test Classification Accuracy
NULL	96.39
L1	97.92
L1 + Dropout	98.12
L2	97.50
L2 + Dropout	98.12
ELN-Reg	98.12
ELN-Reg + Dropout	98.54

3.3.2. Modified Transfer Learning Models

Transfer learning refers to the technique of modifying or reusing a model that has been trained for one task to be used for a similar task (see Figure 3). The objective of transfer learning is to improve the efficiency of target learners by leveraging knowledge from related source domains. It is a commonly used methodology for developing machine learning models without requiring large datasets [33]. The key advantages of transfer learning include reduced training time, improved neural network performance, and the need for only a modest amount of data [34–36].

As illustrated in the middle box in Figure 2, this research enhances five state-of-the-art transfer learning (TL) models: EfficientNetB0, MobileNetV2, DenseNet121, NASNetMobile, and EfficientNetV2B0 [37–41]. These models were imported directly from the Keras library (Keras applications). Table 5 lists the TL models employed for further enhancement.

Table 5. TL architectures utilized in this study.

Model	Total Number of Parameters	Trainable Parameters	Non-Trainable Parameters
EfficientNetB0	5,330,571	5,288,548	42,023
MobileNetV2	3,538,984	3,504,872	34,112
DenseNet121	8,062,504	7,978,856	83,648
NASNetMobile	5,326,716	5,289,978	36,738
EfficientNetV2B0	7,200,312	7,139,704	60,608

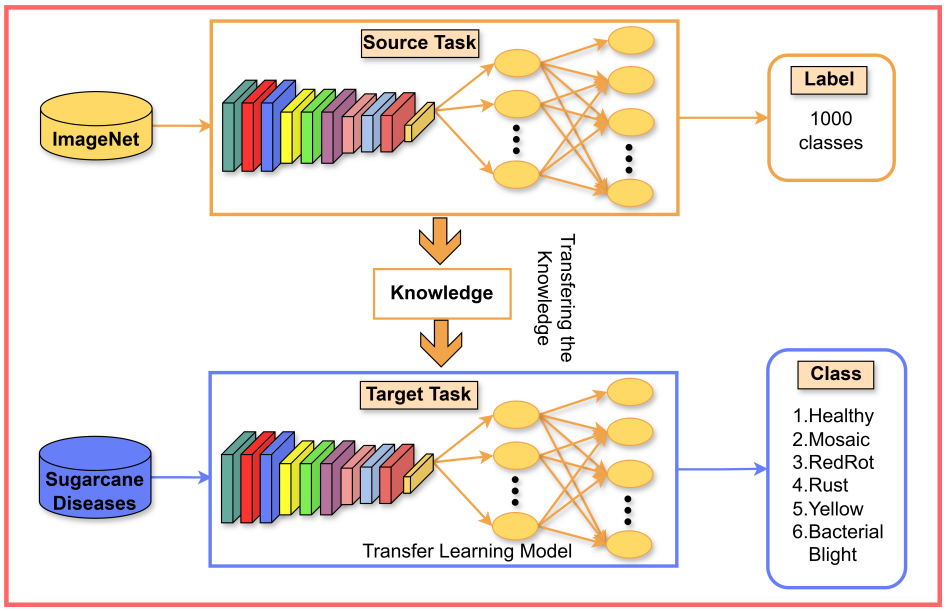


Figure 3. The concept of transfer learning.

Three dropout layers, three batch normalization layers, and four dense layers were used in place of the classification layers in each of the five models shown in Table 5. After ELN-Reg regularization, the first three dense layers were applied. Additionally, these layers utilized the Rectified Linear Unit (ReLU) activation function to enhance nonlinearity and facilitate feature extraction. The models were trained over 50 epochs, with early stopping techniques applied to obtain optimal weights. To mitigate overfitting, a dropout rate of 0.3 was used. All models were tested and validated using a fixed seed of 42, with a learning rate of 0.0001, the RMSprop optimizer, the categorical cross-entropy loss function, and a batch size of 32. An exhaustive list of all the layers and learning parameters in the modified EfficientNetB0 model can be found in Table 6.

Table 6. The modified EfficientNetB0's layers and learning settings.

Layer (Type)	Output Shape	Parameters
Input Layer	[(None, 224, 224, 3)]	0
EfficientNetB0	(None, 1280)	4,049,564
Dense	(None, 128)	163,968
Batch Normalization	(None, 128)	896
Dropout	(None, 128)	0
Dense	(None, 64)	8256
Batch Normalization	(None, 64)	448
Dropout	(None, 64)	0
Dense	(None, 32)	2080
Batch Normalization	(None, 32)	224
Dropout	(None, 32)	0
Dense	(None, 6)	198

3.3.3. Deep Ensemble Convolutional Neural Network (DECNN) Model

It is commonly acknowledged that ensemble learning techniques are a novel way to address many machine learning problems. Individual model predictive performance can be greatly enhanced by ensemble approaches [42] through training numerous models and aggregating their predictions. Two primary strategies are typically employed in the design of ensemble algorithms: the average ensemble and the weighted ensemble [43]. The average ensemble assumes that all models contribute equally and have similar accuracy, while the weighted ensemble acknowledges that some models may outperform others, allowing those with superior performance to have greater influence in the final prediction.

In this study, a weighted ensemble was constructed using the modified, high-performing EfficientNetB0, MobileNetV2, and DenseNet121 models.

In this paper, a customized weight search space was developed for each model based on its performance on the validation set (see Figure 4). The initial base weights and the corresponding weight search space were determined using the formulas presented in Equations (2) and (3).

$$bw_i = \frac{P_i}{\sum_{j=1}^{N} P_j} \tag{2}$$

$$WS_i = [\max(0.1, bw_i \times 0.5), \min(2.0, bw_i \times 2.0)] \tag{3}$$

In this context, the term bw_i represents the base weight of the ith model, i denotes the performance metric of the ith model, N signifies the total number of models, and WS_i stands for the weighted search space of the ith model. Algorithm 1 presents the algorithm for learning a weighted ensemble.

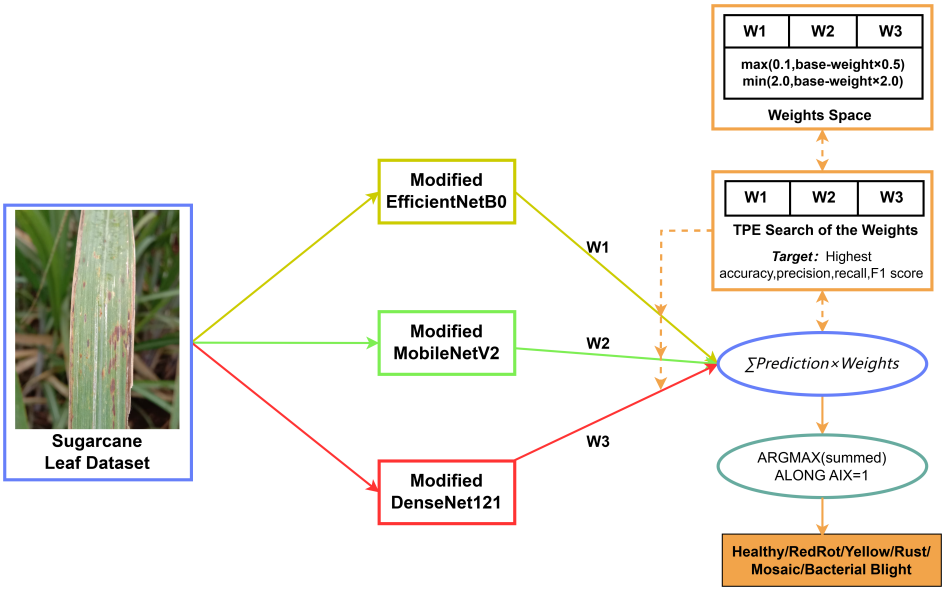


Figure 4. Proposed DECNN model.

Algorithm 1 Weighted ensemble.

Input: Test_set T, Models M_k and Weight_set W_k $(k = 1$ to $n)$ where k is the number of models
Output: F_o
Ensemble_model $E = [M_1, M_2, \ldots, M_k]$
For $i = 1$ to k **do**
    Predict, P = generate (T)
    S = add $(P * W_i,$ along y axis$)$
    F_o = index_max $(S,$ along x axis$)$
Confusion_matrix (F_o, T)
Classification_matrices (F_o, T)
End

In this paper, the ensemble of models to be ensembled, designated as E, is composed of the modified EfficientNetB0, MobileNetV2, and DenseNet121, each assigned optimal weights W_i, where i = 1, 2, 3, which were obtained in the search space through the application of the TPE [44] algorithm.

3.4. Model Performance Metrics

Model evaluation is a critical phase in the machine learning pipeline, serving to determine the model's ability to generalize to unseen data. As mentioned below, a confusion

matrix, a receiver operating characteristic (ROC) curve, and a number of performance measures are used in this work to assess the proposed model. These metrics include accuracy, precision, recall, and F1 score.

$$\text{Accuracy} = \frac{\sum TP + \sum TN}{\sum TP + \sum TN + \sum FP + \sum FN} \times 100\% \tag{4}$$

$$\text{Precision} = \frac{\sum TP}{\sum TP + \sum FP} \times 100\% \tag{5}$$

$$\text{Recall} = \frac{\sum TP}{\sum TP + \sum FN} \times 100\% \tag{6}$$

$$\text{F1 score} = 2 \times \left(\frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \right) \times 100\% \tag{7}$$

$$\text{Macro Avg Measure} = \frac{1}{N} \sum_{i=1}^{N} \text{Measure in class}_i \tag{8}$$

$$\text{Weighted Avg Measure} = \frac{\sum_{i=1}^{N} (\text{Measure} \times \text{weight}) \text{ in class}_i}{\text{Total number of samples}} \tag{9}$$

4. Results

The modified transfer learning (TL) models and the proposed DECNN model were trained and validated on Google Colaboratory using the Google Compute Engine with an NVIDIA Tesla T4 GPU, which provides 16 GB of GDDR6 memory. TensorFlow-Keras version 2.0 served as the deep learning framework for this study. The hyperparameter selection details and other relevant configuration information are available in Section 3.3.2. Table 7 summarizes the accuracies of the modified TL models on the augmented sugarcane leaf disease dataset, indicating the extent of modifications applied. Table 8 displays the results of the ablation experiments, which demonstrate how performance was affected by progressively increasing the model, with the enhanced EfficientNetB0 serving as the baseline. Additionally, Table 9 presents the key evaluation metrics, including precision, recall, and F1 score, along with the macro and weighted means for each model, assessed on the test set.

Table 7. Comparison of test results of the modified TL models on the augmented dataset.

Model	Original	Modified	Improvement
NASNetMobile	85.00	92.71	+%7.71
EfficientNetV2B0	90.21	94.17	+%3.96
MobileNetV2	92.50	96.67	+%4.17
DenseNet121	95.83	98.12	+%2.29
EfficientNetB0	97.08	98.54	+%1.46

Table 8. The ablation experiments on the enlarged dataset of sugarcane leaf diseases.

Trial	Test Classification Accuracy
EfficientNetB0 (Baseline)	98.54
+DenseNet121	98.75
+MobileNetV2 (DECNN)	99.17

Table 9. Comprehensive analysis of the performance of the models.

Model (Modified)	Macro Average			Weighted Average			Accuracy
	Precision	Recall	F1 Score	Precision	Recall	F1 Score	
NASNetMobile	93.24	92.78	92.80	93.31	92.71	92.78	92.71
EfficientNetV2B0	94.47	94.40	94.27	94.57	94.17	94.20	94.17
MobileNetV2	96.60	96.76	96.64	96.75	96.67	96.67	96.67
DenseNet121	98.22	98.11	98.16	98.14	98.12	98.12	98.12
EfficientNetB0	98.59	98.50	98.53	98.58	98.54	98.54	98.54
Proposed the DECNN	99.23	99.13	99.18	99.17	99.17	99.17	99.17

4.1. Results of Modified Transfer Learning Models

Five modified transfer learning (TL) models, specifically EfficientNetB0, MobileNetV2, DenseNet121, NASNetMobile, and EfficientNetV2B0, were trained on the expanded sugarcane leaf disease dataset. Figure 5 illustrates the accuracies of these modified TL models over time. The accuracies of these models on the dataset ranged from 92.71% to 98.54%. Notably, the modified EfficientNetB0 model exhibited the most linear trajectory, with substantial overlap between the training and validation accuracy curves, indicating superior generalization capability.

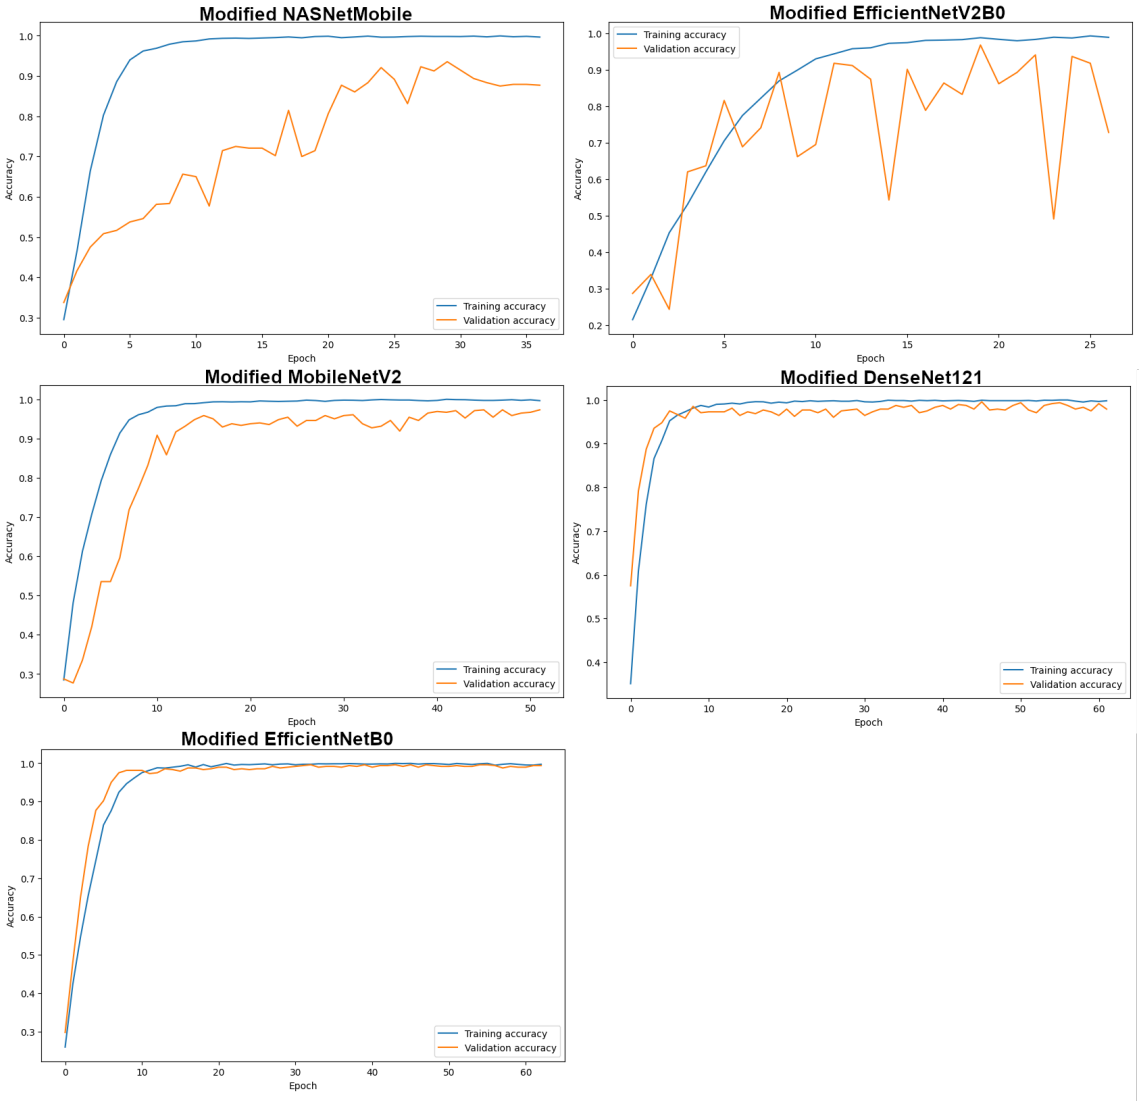


Figure 5. Accuracies of the modified models versus the number of epochs.

The receiver operating characteristic (ROC) curves for each improved transfer learning (TL) model are shown in Figure 6. This study's examination of the micro-averaged ROC curve highlights how well the model differentiates between cases in each category, both positive and negative. A thorough assessment of the model's performance can be attained through a close inspection of the form of the ROC curve, its distance from the upper left corner, and the area under the curve (AUC). Perfect discrimination is shown by an AUC value of 1, which is a crucial sign of model performance. With the exception of NASNetMobile and EfficientNetV2B0, all modified TL models achieved AUC values closer to 1 across each category, suggesting a high degree of accuracy in correctly classifying all forms of sugarcane leaf disease.

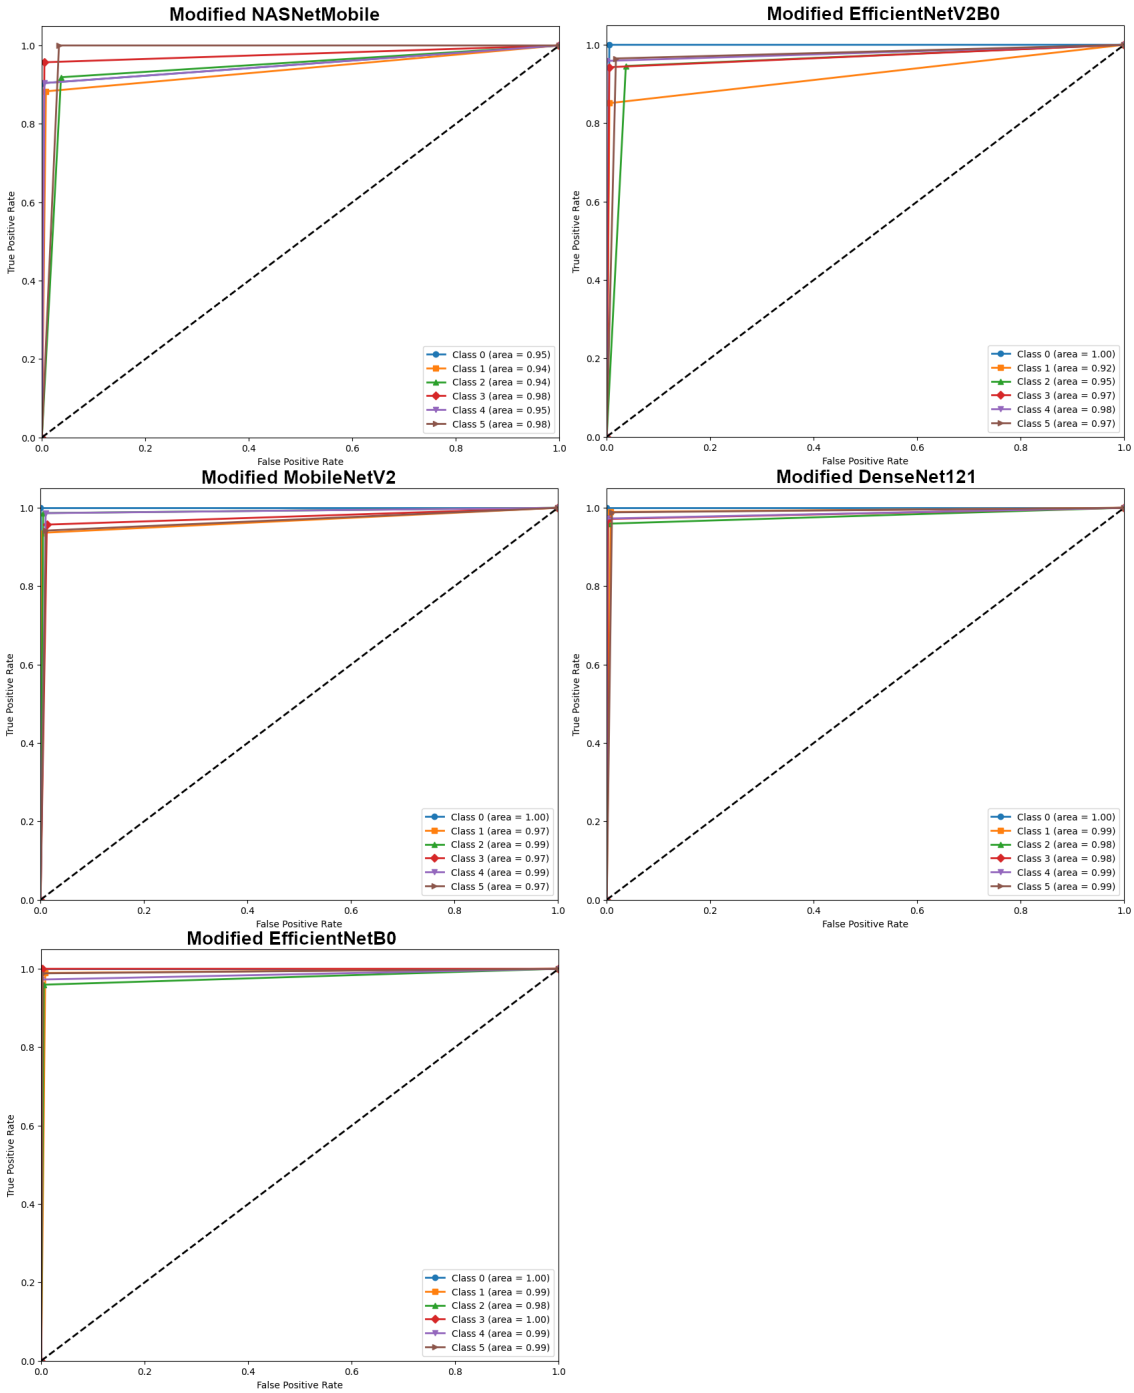


Figure 6. ROC curves of modified TL models.

Presented in Figure 7 are the confusion matrices produced from 480 test cases. The matrices of the modified transfer learning (TL) models for sugarcane leaf diseases are shown in this figure, along with their classification results. The matrices include true positives, false positives, true negatives, and false negatives for each model. As depicted in Figure 7, the modified NASNetMobile and EfficientNetV2B0 models achieved relatively low classification accuracies, correctly identifying only 446 and 452 out of the 480 sugarcane leaf disease cases, respectively. In contrast, the remaining models—the modified MobileNetV2, DenseNet121, and EfficientNetB0 models—demonstrated progressive improvements in performance. Among these, the modified EfficientNetB0 model achieved the highest accuracy, correctly identifying 453 out of 480 cases, thereby showcasing the best overall classification performance among the five models.

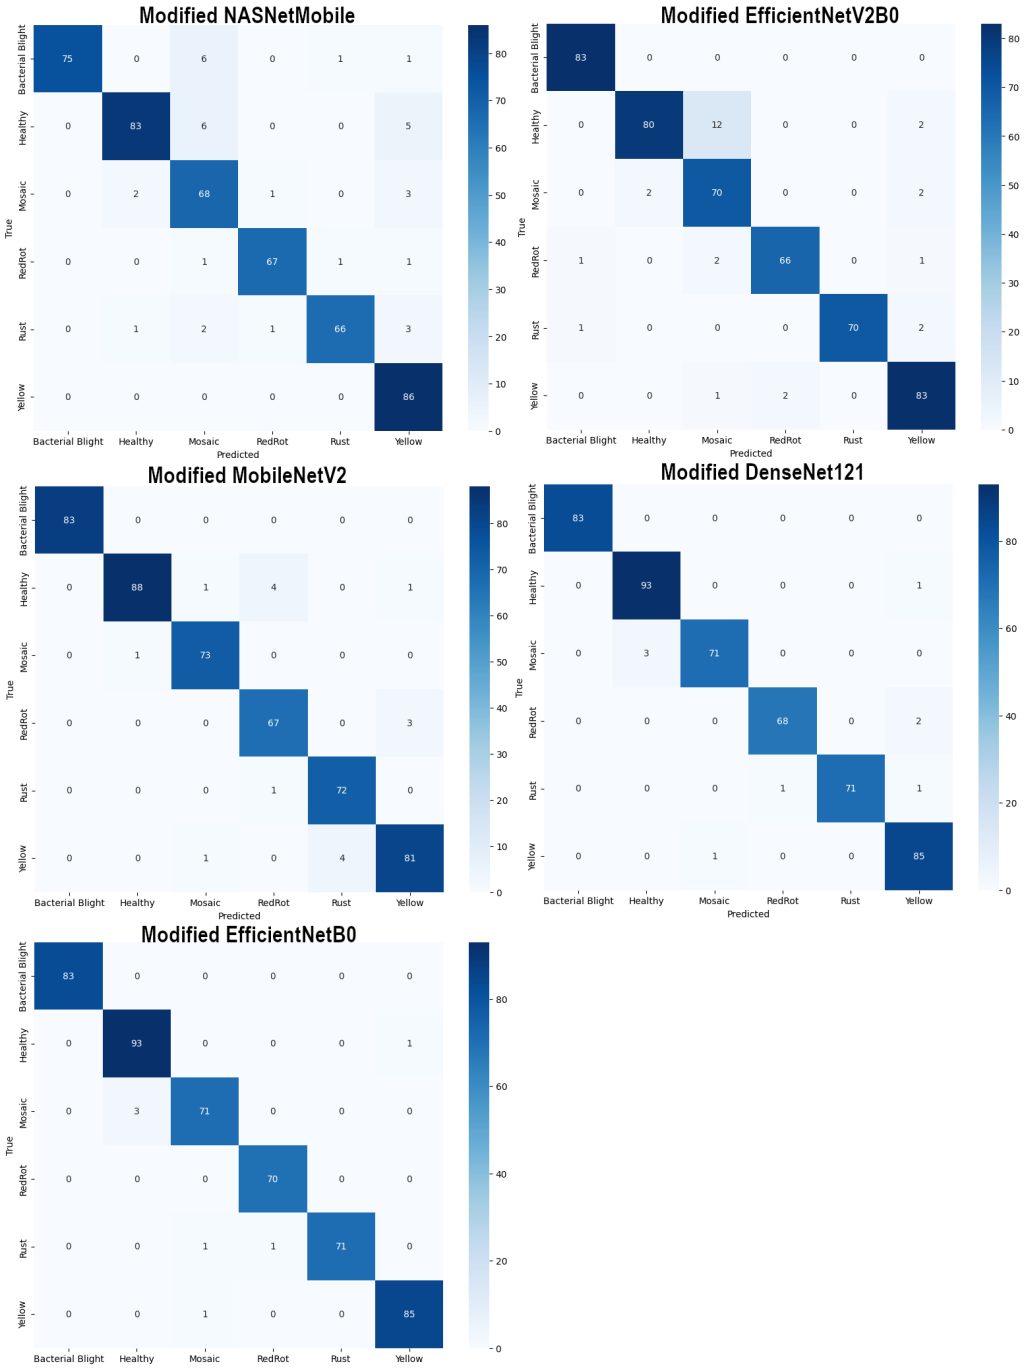


Figure 7. Confusion matrices of the modified TL models.

As shown in Table 7, the specific accuracies of the modified TL models—namely NASNetMobile, EfficientNetV2B0, MobileNetV2, DenseNet121, and EfficientNetB0—were 92.71%, 94.17%, 96.67%, 98.12%, and 98.54%, respectively. These results indicate varying degrees of performance improvements across the five modified TL models, with the modified EfficientNetB0 model demonstrating clear superiority over the others. The adjusted EfficientNetB0 model outperformed the other five modified TL models in terms of precision, recall, F1 score, and prediction accuracy in the thorough performance evaluation presented in Table 9.

4.2. Results of Proposed the DECNN Model

The DECNN model is composed of the three most accurate modified versions of EfficientNetB0, MobileNetV2, and DenseNet121, utilizing a custom-weighted ensemble strategy. As shown in Table 9, the DECNN model achieved an accuracy of 99.17%, a precision of 99.23%, a recall of 99.13%, and an F1 score of 99.18%. These results surpassed the performance of all modified TL models, representing the most remarkable outcome in this study. Figure 8 illustrates the receiver operating characteristic (ROC) curves and confusion matrix of the DECNN model, which exhibited the highest performance overall. The ROC curve for the DECNN model indicates four categories with an area under the curve (AUC) of 1, while the remaining two categories had an AUC approaching 1. The model correctly classified 476 out of 480 images of sugarcane leaf diseases, resulting in only four misclassifications. The efficiency of the DECNN model presented in this research in detecting and classifying sugarcane leaf diseases is well demonstrated through the thorough analysis of the performance indicators.

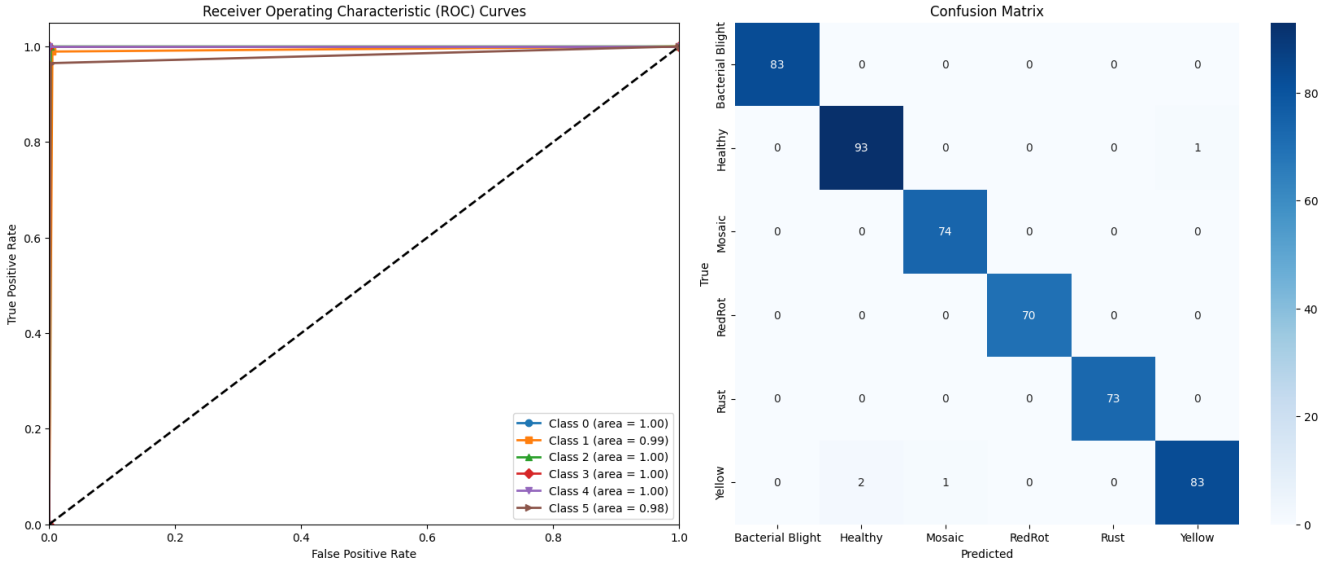


Figure 8. ROC curves and confusion matrix of proposed the DECNN model.

5. Discussion

The Kaggle dataset comprises six categories and a total of 2646 images, which this study utilized to develop a computer vision-based technique for classifying sugarcane leaf diseases.

Developing learning models on relatively small datasets presents significant challenges. To mitigate the limitations associated with the availability of extensive datasets, this paper introduces a series of data augmentation techniques, including scaling, rotation, cropping, width shifting, height shifting, brightness adjustment, and horizontal flipping. These augmentation techniques expand the dataset and reduce the likelihood of overfitting [28]. Additionally, this study employs transfer learning, which enhances model performance despite limited data availability. As an illustration, Bagchi et al. [20] created a novel hy-

brid model with excellent accuracy, although the authors did not use data augmentation approaches. Had they done so, they might have achieved even higher accuracy. In this study, five modified transfer learning (TL) models were utilized, incorporating dense layers and batch normalization layers at the base of each model to minimize overfitting and improve accuracy. Regularization techniques, such as ELN-Reg and dropout, were also employed to prevent overfitting due to the limited training data. Furthermore, Rahman Yead et al. [31] utilized several classical deep learning architectures, including ResNet50, VGG16, DenseNet201, VGG19, and Inception V3, without modifications to the TL model. While designing their models, Daphal et al. [24] used average ensemble techniques instead of weighted ensemble learning. To further enhance performance, this paper adopts a bespoke weighted ensemble strategy for the top three modified models—EfficientNetB0, MobileNetV2, and DenseNet121—based on accuracy.

Table 10 presents the optimal weights obtained from the Tree-structured Parzen Estimator (TPE) search. The proposed DECNN model achieved the best performance when utilizing these weights, demonstrating the highest accuracy in various experiments and relative to previous studies. As illustrated in Figure 8, the model achieved an accuracy of 476 out of 480 test data points, with only four misclassifications. Table 9 shows the highest precision (99.23%), recall (99.13%), F1 score (99.18%), and accuracy (99.17%) recorded in this study. As depicted in Figure 9, the model demonstrated a high degree of accuracy in classifying the test data. Table 11 compares the proposed model with recently published models [19–21,24]. It is clear that the model proposed in this work greatly improves the classification accuracy of sugarcane leaf diseases.



Figure 9. Final predicted outputs.

Table 10. Tuned weight values.

Model (Modified)	Weight Values
EfficientNetB0	0.58
MobileNetV2	0.17
DenseNet121	0.21

Table 11. Comparison of the performance of the model proposed in this paper with that of previous works.

No.	Method	Accuracy
1	Rahaman Yead et al. [19]	95.69
2	Bagchi et al. [20]	96.80
2	Sidana et al. [21]	96.00, 97.00
3	Daphal et al. [24]	86.53
4	Proposed method	99.17

Recognizing this study's shortcomings is essential. First, it is important to note that traditional machine learning models were not utilized, as the majority of the existing literature indicates that deep learning techniques tend to outperform traditional machine learning approaches. However, the potential efficacy of hybrid machine learning techniques on the current dataset warrants further investigation. Second, this study focused exclusively on five common sugarcane leaf diseases. For the model to be applicable in real-world scenarios, it is essential to address a broader range of sugarcane leaf diseases. Additionally, only five principal modified transfer learning models were considered, some of which were combined in the ensemble. While these modified TL models effectively fulfilled the experimental objectives of this research, incorporating additional modified TL models could enhance the robustness and applicability of future studies.

6. Conclusions

This paper proposes a robust and highly accurate Deep Ensemble Convolutional Neural Network (DECNN) model for the early detection of sugarcane leaf diseases. The proposed model incorporates dense and batch normalization layers, applies regularization methods such as ELN-Reg and dropout to mitigate overfitting, and employs early stopping optimization techniques for five transfer learning models: EfficientNetB0, MobileNetV2, DenseNet121, NASNetMobile, and EfficientNetV2B0. Additionally, various data augmentation techniques were utilized to expand the dataset and further reduce the risk of overfitting. A comprehensive comparative analysis of the modified transfer learning (TL) models was conducted. Ultimately, the three most effective models for disease classification were selected, and their predictions were integrated through a customized weighted strategy. The DECNN model exhibited significant improvements in performance metrics, achieving accuracy, precision, recall, and F1 scores of 99.17%, 99.23%, 99.13%, and 99.18%, respectively. Ultimately, this high-precision model may help growers identify and cure leaf illnesses in sugarcane crops early on, which could increase sugarcane yields.

There is a considerable need for more research to improve and broaden this model, even though the focus of this work was on identifying five common types of sugarcane leaf diseases. It would be advantageous to include a wider variety of sugarcane illnesses or investigate how well this model works in identifying leaf diseases in other important food crops, like maize and potatoes. This would support the validity of the model's applicability and generalization capabilities. Additionally, lightweight networks can be integrated with the DECNN concept. The goal is to make this network topology appropriate for deployment in mobile-based systems by streamlining and shrinking it in the future. Furthermore, an application will be developed to give farmers and agricultural organizations a means of interacting with the model and applying it to the real-world issue of sugarcane crop disease classification. Farmers will thus be able to spot illnesses early on and save their harvests from being destroyed.

Author Contributions: Conceptualization, K.H. and H.L.; Investigation, K.H. and S.Z.; Methodology, K.H. and H.L.; Resources, K.H.; Visualization, K.H.; Writing—original draft, K.H.; Writing—review & editing, K.H. and S.Z.; Project administration, H.L. and X.F.; funding acquisition, H.L. and X.F. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by the National Natural Science Foundation of China, Grant No. 61962047; the Inner Mongolia Autonomous Region Science and Technology Major Special Project, Grant No. 2021ZD0005; the Natural Science Foundation of Inner Mongolia Autonomous Region, Grant No. 2024MS06002; the Inner Mongolia Autonomous Region Directly Affiliated Universities Basic Scientific Research Business Fund, Grant No. BR22-14-05; the Inner Mongolia Autonomous Region Higher Education Institutions Innovation Research Team Project NMGIRT2313, Grant No. XTCX2023-20; and the Collaborative Innovation Project of Universities and Institutes in Hohhot City Grant No. XTCX2023-24.

Data Availability Statement: The Five Crop Diseases Dataset is available at https://www.kaggle.com/datasets/shubham2703/five-crop-diseases-dataset (accessed on 10 August 2024). The Sugarcane Leaf Disease Dataset is available at https://www.kaggle.com/datasets/nirmalsankalana/sugarcane-leaf-disease-dataset (accessed on 10 August 2024).

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Rae, A.L.; Grof, C.P.L.; Casu, R.E.; Bonnett, G.D. Sucrose accumulation in the sugarcane stem: Pathways and control points for transport and compartmentation. *Field Crop. Res.* **2005**, *92*, 159–168. [CrossRef]
2. Ali, A.; Khan, M.; Sharif, R.; Mujtaba, M.; Gao, S.-J. Sugarcane Omics: An Update on the Current Status of Research and Crop Improvement. *Plants* **2019**, *8*, 344. [CrossRef] [PubMed]
3. Hemalatha, N.K.; Brunda, R.N.; Prakruthi, G.S.; Prabhu, B.V.B.; Shukla, A.; Narasipura, O.S.J. Sugarcane leaf disease detection through deep learning. In *Deep Learning for Sustainable Agriculture*; Poonia, R.C., Singh, V., Nayak, S.R., Eds.; Elsevier Academic Press: London, UK, 2022; pp. 297–323.
4. Li, A.-M.; Liao, F.; Wang, M.; Chen, Z.-L.; Qin, C.-X.; Huang, R.-Q.; Verma, K.K.; Li, Y.-R.; Que, Y.-X.; Pan, Y.-Q.; et al. Transcriptomic and Proteomic Landscape of Sugarcane Response to Biotic and Abiotic Stressors. *Int. J. Mol. Sci.* **2023**, *24*, 8913. [CrossRef] [PubMed]
5. Yadav, S.; Singh, S.R.; Bahadur, L.; Kumari, U.; Banerjee, T.; Gupta, S.; Singh, N. Sugarcane Trash Ash Affects Degradation and Bioavailability of Pesticides in Soils. *Sugar Tech* **2023**, *25*, 77–85. [CrossRef]
6. Ali, M.M.; Bachik, N.A.; Muhadi, N.A.; Yusof, T.N.T.; Gomes, C. Non-destructive techniques of detecting plant diseases: A review. *Physiol. Mol. Plant Pathol.* **2019**, *108*, 101426. [CrossRef]
7. Lu, T.; Han, B.; Chen, L.; Yu, F.; Xue, C. A generic intelligent tomato classification system for practical applications using DenseNet-201 with transfer learning. *Sci. Rep.* **2021**, *11*, 15824. [CrossRef]
8. Kouadio, L.; El Jarroudi, M.; Belabess, Z.; Laasli, S.-E.; Roni, M.Z.K.; Amine, I.D.I.; Mokhtari, N.; Mokrini, F.; Junk, J.; Lahlali, R. A Review on UAV-Based Applications for Plant Disease Detection and Monitoring. *Remote Sens.* **2023**, *15*, 4273. [CrossRef]
9. Krishnamoorthy, N.; Prasad, L.V.N.; Kumar, C.S.P.; Subedi, B.; Abraha, H.B.; Sathiskumar, V.E. Rice leaf diseases prediction using deep neural networks with transfer learning. *Environ. Res.* **2021**, *198*, 111275.
10. Shorten, C.; Khoshgoftaar, T.M. A survey on Image Data Augmentation for Deep Learning. *J. Big Data* **2019**, *6*, 60. [CrossRef]
11. Ayana, G.; Dese, K.; Choe, S.-w. Transfer Learning in Breast Cancer Diagnoses via Ultrasound Imaging. *Cancers* **2021**, *13*, 738. [CrossRef]
12. Yigit, E.; Sabanci, K.; Toktas, A.; Kayabasi, A. A study on visual features of leaves in plant identification using artificial intelligence techniques. *Comput. Electron. Agric.* **2019**, *156*, 369–377. [CrossRef]
13. Basavaiah, J.; Anthony, A.A. Tomato leaf disease classification using multiple feature extraction techniques. *Wirel. Pers. Commun.* **2020**, *115*, 633–651. [CrossRef]
14. Chanda, M.; Biswas, M. Plant disease identification and classification using Back-Propagation Neural Network with Particle Swarm Optimization. In Proceedings of the 2019 3rd International Conference on Trends in Electronics and Informatics (ICOEI), Tirunelveli, India, 23–25 April 2019; pp. 1029–1036.
15. Hossain, E.; Hossain, M.F.; Rahaman, M.A. A color and texture based approach for the detection and classification of plant leaf disease using KNN classifier. In Proceedings of the 2019 International Conference on Electrical, Computer and Communication Engineering (ECCE), Cox's Bazar, Bangladesh, 7–9 February 2019; pp. 1–6.
16. Wu, Y.; Feng, X.; Chen, G. Plant Leaf Diseases Fine-Grained Categorization Using Convolutional Neural Networks. *IEEE Access* **2022**, *10*, 41087–41096. [CrossRef]
17. Patil, R.R.; Kumar, S. Rice-Fusion: A Multimodality Data Fusion Framework for Rice Disease Diagnosis. *IEEE Access* **2022**, *10*, 5207–5222. [CrossRef]
18. Elfatimi, E.; Eryigit, R.; Elfatimi, L. Beans Leaf Diseases Classification Using MobileNet Models. *IEEE Access* **2022**, *10*, 9471–9482. [CrossRef]
19. Rahaman Yead, M.A.; Rukhsara, L.; Rabeya, T.; Jahan, I. Deep Learning-Based Classification of Sugarcane Leaf Disease. In Proceedings of the 2024 6th International Conference on Electrical Engineering and Information & Communication Technology (ICEEICT), Dhaka, Bangladesh, 2–4 May 2024; pp. 818–823.

20. Bagchi, A.K.; Haider Chowdhury, M.A.; Fattah, S.A. Sugarcane Disease Classification using Advanced Deep Learning Algorithms: A Comparative Study. In Proceedings of the 2024 6th International Conference on Electrical Engineering and Information & Communication Technology (ICEEICT), Dhaka, Bangladesh, 2–4 May 2024; pp. 887–892.
21. Sidana, S. Improving Sugarcane Disease Identification with L1-Regularized Transfer Learning Approach. In Proceedings of the 2nd International Conference on Emerging Technologies and Sustainable Business Practices-2024 (ICETSBP 2024), Mohali, India, 28–29 June 2024; pp. 152–166.
22. Pham, T.N.; Tran, L.V.; Dao, S.V.T. Early Disease Classification of Mango Leaves Using Feed-Forward Neural Network and Hybrid Metaheuristic Feature Selection. *IEEE Access* **2020**, *8*, 189960–189973. [CrossRef]
23. Sun, C.; Zhou, X.; Zhang, M.; Qin, A. SE-VisionTransformer: Hybrid Network for Diagnosing Sugarcane Leaf Diseases Based on Attention Mechanism. *Sensors* **2023**, *23*, 8529. [CrossRef]
24. Daphal, S.D.; Koli, S.M. Enhancing sugarcane disease classification with ensemble deep learning: A comparative study with transfer learning techniques. *Heliyon* **2023**, *9*, e18261. [CrossRef]
25. Sharma, S. Five Crop Diseases Dataset. Available online: https://www.kaggle.com/datasets/shubham2703/five-crop-diseases-dataset (accessed on 10 August 2024).
26. Sankalana, N. Sugarcane Leaf Disease Dataset. Available online: https://www.kaggle.com/datasets/nirmalsankalana/sugarcane-leaf-disease-dataset (accessed on 10 August 2024).
27. Ali, A.; Ali, S.; Husnain, M.; Missen, M.M.S.; Samad, A.; Khan, M. Detection of Deficiency of Nutrients in Grape Leaves Using Deep Network. *Math. Probl. Eng.* **2022**, *2022*, 3114525. [CrossRef]
28. Bansal, P.; Kumar, R.; Kumar, S. Disease detection in Apple leaves using deep convolutional neural network. *Agriculture* **2021**, *11*, 617. [CrossRef]
29. Fan, C.; Chen, M.; Wang, X.; Wang, J.; Huang, B. A Review on Data Preprocessing Techniques Toward Efficient and Reliable Knowledge Discovery From Building Operational Data. *Front. Energy Res.* **2021**, *9*, 652801. [CrossRef]
30. Zou, H.; Hastie, T. Regularization and Variable Selection Via the Elastic Net. *J. R. Stat. Soc. Ser. B Stat. Methodol.* **2005**, *67*, 301–320. [CrossRef]
31. Dialameh, M.; Hamzeh, A.; Rahmani, H.; Dialameh, H.; Kwon, H.J. DL-Reg: A deep learning regularization technique using linear regression. *Expert Syst. Appl.* **2024**, *247*, 123182. [CrossRef]
32. Akiba, T.; Sano, S.; Yanase, T.; Ohta, T.; Koyama, M. Optuna: A Next-generation Hyperparameter Optimization Framework. In Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (KDD '19), Anchorage, AK, USA, 4–8 August 2019; pp. 2623–2631.
33. Hosna, A.; Merry, E.; Gyalmo, J.; Alom, Z.; Aung, Z.; Azim, M.A. Transfer learning: A friendly introduction. *J. Big Data* **2022**, *9*, 102. [CrossRef] [PubMed]
34. Neyshabur, B.; Sedghi, H.; Zhang, C. What is being transferred in transfer learning? In Proceedings of the 34th International Conference on Neural Information Processing Systems (NIPS '20), Vancouver, BC, Canada, 6–12 December 2020; pp. 512–523.
35. Liu, L.; Chen, J.; Fieguth, P.; Zhao, G.; Chellappa, R.; Pietikäinen, M. From BoW to CNN: Two Decades of Texture Representation for Texture Classification. *Int. J. Comp. Vis.* **2019**, *127*, 74–109. [CrossRef]
36. Yan, Y.; Ren, W.; Cao, X. Recolored Image Detection via a Deep Discriminative Model. *IEEE Trans. Inf. Forensics Secur.* **2019**, *14*, 5–17. [CrossRef]
37. Tan, M.; Le, Q.V. EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks. *arXiv* **2019**, arXiv:1905.11946.
38. Sandler, M.; Howard, A.; Zhu, M.; Zhmoginov, A.; Chen, L.-C. MobileNetV2: Inverted Residuals and Linear Bottlenecks. In Proceedings of the 2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition, Salt Lake City, UT, USA, 18–23 June 2018; pp. 4510–4520.
39. Huang, G.; Liu, Z.; Maaten, L.V.D.; Weinberger, K.Q. Densely Connected Convolutional Networks. In Proceedings of the 2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR), Honolulu, HI, USA, 21–26 July 2017; pp. 2261–2269.
40. Zoph, B.; Vasudevan, V.; Shlens, J.; Le, Q.V. Learning Transferable Architectures for Scalable Image Recognition. In Proceedings of the 2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition, Salt Lake City, UT, USA, 18–23 June 2018; pp. 8697–8710.
41. Tan, M.; Le, Q.V. EfficientNetV2: Smaller Models and Faster Training. *arXiv* **2021**, arXiv:2104.00298.
42. Sagi, O.; Rokach, L. Ensemble learning: A survey. *WIREs Data Min. Knowl. Discov.* **2018**, *8*, e1249. [CrossRef]
43. Dietterichl, T.G. Ensemble learning. In *The Handbook of Brain Theory and Neural Networks*; Arbib, M.A., Ed.; MIT Press: Cambridge, MA, USA, 2002; pp. 405–408.
44. Bergstra, J.; Yamins, D.; Cox, D.D. Making a science of model search: Hyperparameter optimization in hundreds of dimensions for vision architectures. In Proceedings of the 30th International Conference on International Conference on Machine Learning—Volume 28 (ICML'13), Atlanta, GA, USA, 16–21 June 2013; pp. I-115–I-123.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.